



Part 1. Introduction

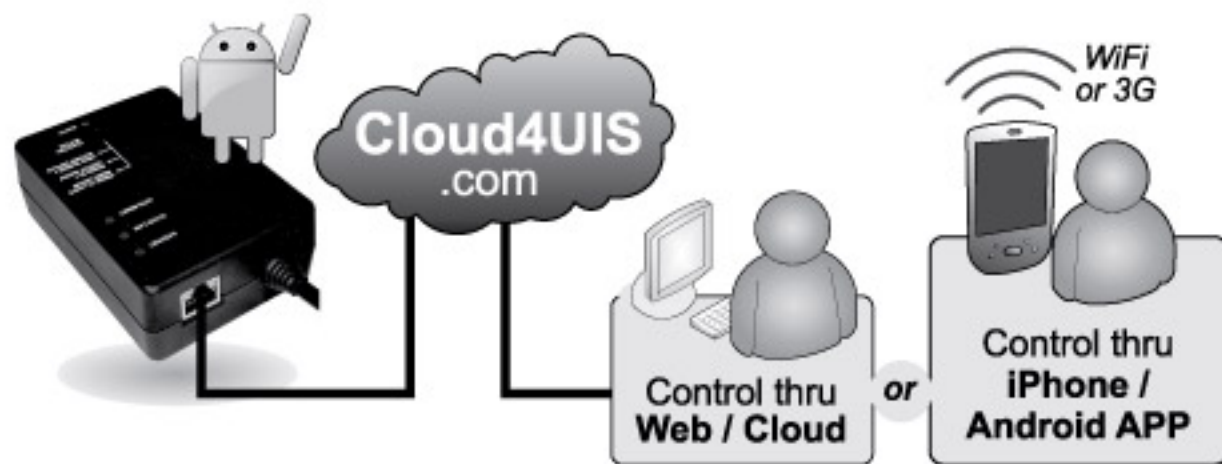

Features:

- Set outlet to auto reset when ping fails.
eg.: Auto reset unresponsive router, modem, IP Cam, NAS or network device.
- Remotely turn outlet On/ Off/ Reset from APP, Cloud4UIS.com or Web.
eg.: To manually reset network device.
- Set scheduled outlet On/ Off/ Reset.
eg.: Schedule IP Cam, WiFi AP, etc to reset.

Part 2. Description

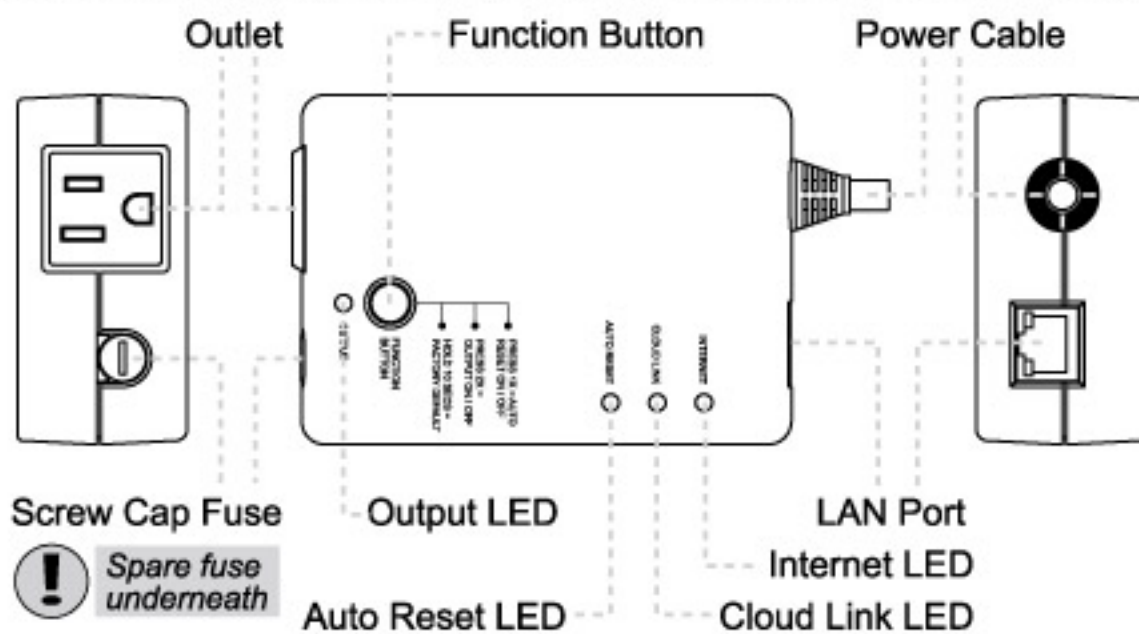

Function Button: Press: 1x = toggle 'Auto Reset' / 'Manual Control'.
2x = toggle Output On / Off.
Hold: 10sec = Reset to Factory Default.


Part 3. LED Indicators

Internet LED (IN)	On: Internet is normal. Off: No internet.
Cloud Link LED (CL)	On: Link is normal. Blinking: Device not connected to server. Off: Device not yet added / linked to cloud account.
Auto Reset LED (AR)	On: Auto Reset enabled. Blinking: Manual control.
Output LED	On: Outlet is On. Blinking: Outlet is Resetting. Off: Outlet is Off.

IN	CL	AR	LED Status	DESCRIPTION
●	●	○	Both blinking until Function Button is released.	Reset device to Factory Default & clears cloud linkage (see Part 5.2).
●	○	●	Both blinking.	Firmware upgrading. DO NOT interrupt or power off!
●	●	●	Blinking in sequence.	Device is in 'Add' mode. Required for [Add by Serial Number] function.

Part 4. How to Setup & 'Add' Device

Step 1: Setup to Auto Reset Router

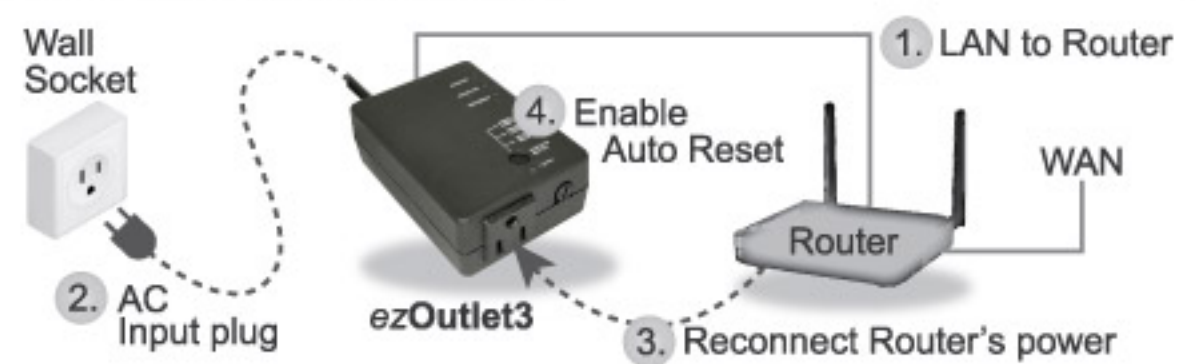

1. Connect ezOutlet3 LAN to an internet ready Router.
2. Connect ezOutlet3 plug to Wall Socket. After system start-up, Output and Internet LED will turn ON.
3. Reconnect Router's power from Wall to ezOutlet3. Allow Router to reinitialize and reconnect to internet.
4. Finally, press [Function Button] 1x to enable [Auto Reset].

INTERNET

AUTO RESET

ezOutlet3 will now Auto Reset Router when internet times out.

Step 2: Download APP & Setup a Cloud Account



For smartphone users:
a. Search for **ezDevice** APP and install.
b. [Sign Up] for a **Cloud4UIS** account.

For PC users:
a. Browse to www.Cloud4UIS.com and [Sign up].

Step 3: Search & Select Device to [Add] to Account

- If APP / PC is connected to the same router as device, select **[Add Device]**.

- If APP / PC is not connected to the same router as device, select **[Add by Serial Number]**.



Once device is successfully 'Added', Cloud Link LED will turn ON.

CLOUD LINK

NOTE:

- The first person to 'Add' the device becomes the 'Owner'.
- Each device can only have one 'Owner'.
- 'Owner' can 'Share' device with other Cloud4UIS users and set these user's access permission.

Part 5. How to Remove 'Added' Device

1. From APP or Cloud4UIS:
Select [Remove Device] to remove User. Device settings retained.
2. From device's [Function Button]:



- a. Press & hold button for 10 sec.
- b. Internet & Cloud Link LED will blink.
- c. Release button.

NOTE:

This action removes 'Owner' & all 'Shared' users from this device and resets it to factory default.

Part 6. Control ezOutlet3 thru Web User-Interface

Access ezOutlet3 Web User-Interface over LAN or WAN (with port forwarding) to directly manage and control it.

- To locate ezOutlet3 LAN IP either;
- a) Check APP > Network > LAN IP
 - or;
 - b) Check router's DHCP table
 - or;
 - c) Install **Netlity** & search LAN.
(PC & ezOutlet3 must be connected to the same router).



Download from:
<http://www.MSNswitch.com>

Default Web User-Interface login;

Username: **admin**

Password: **device's_last_6_MAC** (refer to device label)

rev. A317



Google play
Download on the
App Store
available from:
ezDevice APP

Model: EZ-62b

USER
GUIDE

ezOutlet3
Designed to Auto Reset
Crashed Network Device