



Gaming Case
THOR V2

Quick User Guide








Table of Contents

- Product Overview
 - Product Diagram 02
 - Front I/O Pin-out 02
 - Accessory Box 03
- Installation Guide
 - 1. Open Chassis 04
 - 2. Installing Power Supply 04
 - 3. Installing Motherboard 05
 - 4. Installing Add On Card 06
 - 5. Installing External 5.25" Device 07
 - 6. Installing External 3.5" Device 08
 - 7. Installing 3.5"/2.5" HDD/SSD 08
- Specifications Table 09

Thank you for purchasing a **Rosewill** Computer Case
Please read the instruction manual before using and
retain it for your future reference.

Product Overview


Product Diagram (Components vary by country)

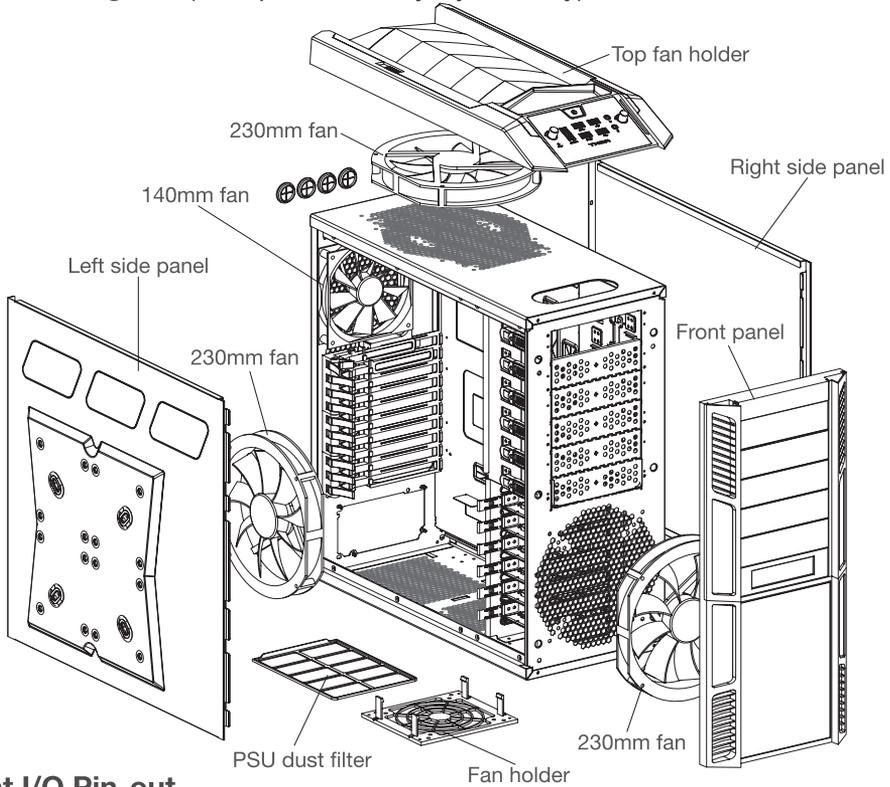

Front I/O Pin-out

USB 3.0 CONNECTOR	AC97 CONNECTOR
USB 2.0 CONNECTOR	HD AUDIO CONNECTOR


Accessory Box (located in the bottom of HDD cage)

Image	Part Name	Oty	Function/Component
	M/B Standoff	14	Motherboard
	M/B Screw	14	Motherboard
	HDD Screw	24	3.5" HDD
	PSU Screw	4	Power Supply
	2.5" HDD Screw	24	2.5" HDD
	FDD Screw	4	3.5" Devices
	Fan Screw	8	Fans
	Cable Tie	8	Cables

Installation Guide


1. Open Chassis

1-1. Unscrew to remove left and right panels.

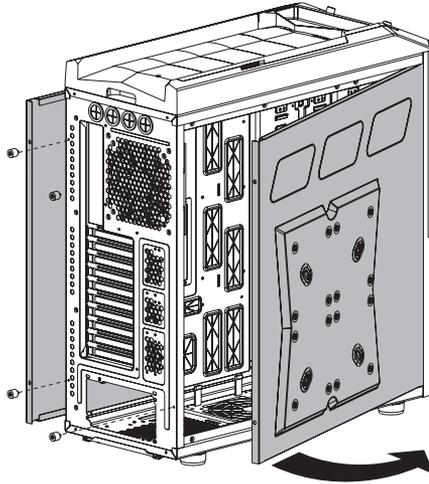


2. Installing Power Supply

2-1. Place the power supply from the left side into the chassis and secure with screws.

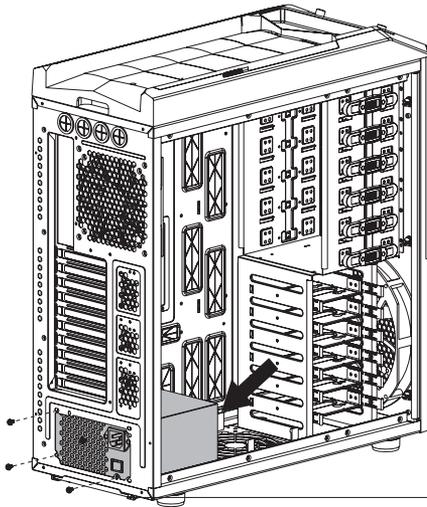

NOTICE:


- If your power supply is equipped with single fan (120mm, 135mm or 140mm), please have the fan face to the bottom.
- Please remember to clean the PSU dust filter regularly.



3. Installing Motherboard

3-1 Install motherboard stand-offs according to your motherboard's form factor.

3-2 Place the motherboard onto stand-offs and secure with screws.

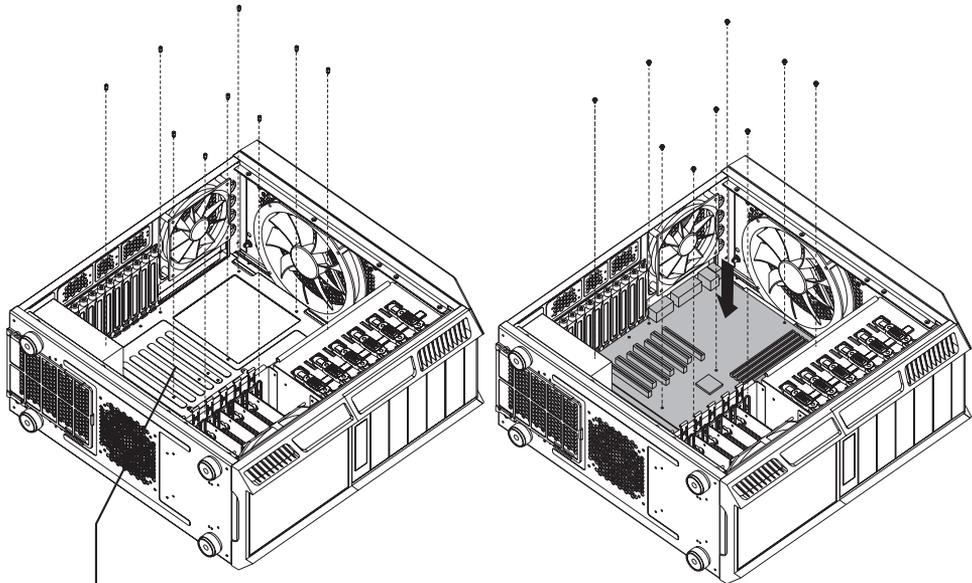


Form factor	hole number
Flex ATX	2,3,4,8,9
ATX	1,3,4,5,8,9,10,11,12
Micro ATX	2,3,4,6,7,8,9,11,12
Full ATX	1,3,4,5,8,9,10,11,12,13,14,15,16


NOTE: Full ATX = Extended ATX

4. Installing Add On Card


4-1. Release the kit and remove the expansion slot cover.

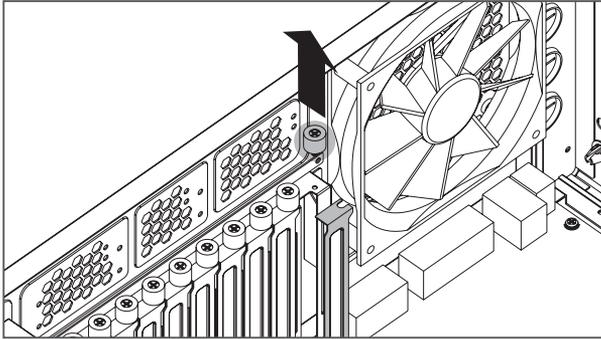

4-2. Install the add-on card.

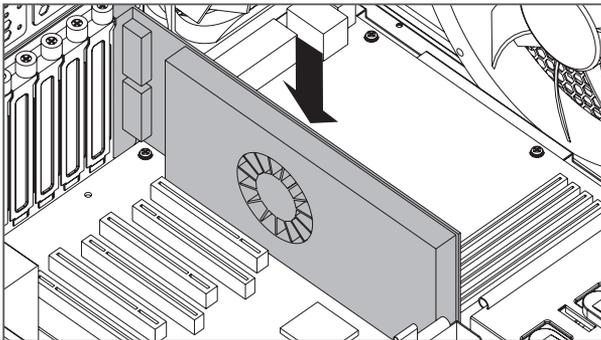


4-3. Fasten the kit to fix the add-on card.

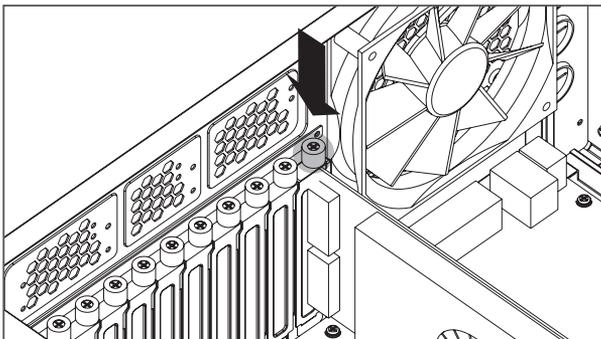


5. Install an External 5.25" Device


- 5-1. Remove the front panel right side bar.
- 5-2. Confirm which bay(s) you want to install device(s) then remove the bay cover.
- 5-3. Install the front panel right side bar back.

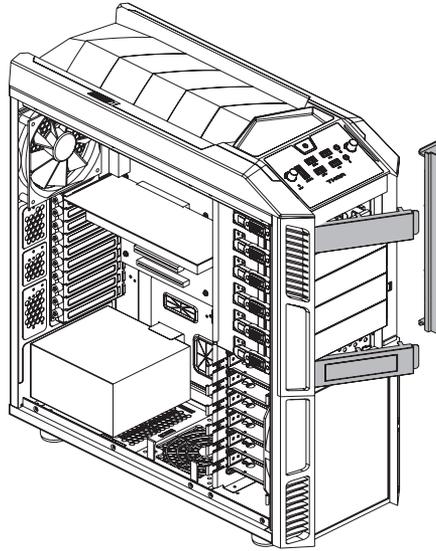


- 5-4. Insert the 5.25" device from the front panel into the chassis then secure with screw-less kits.

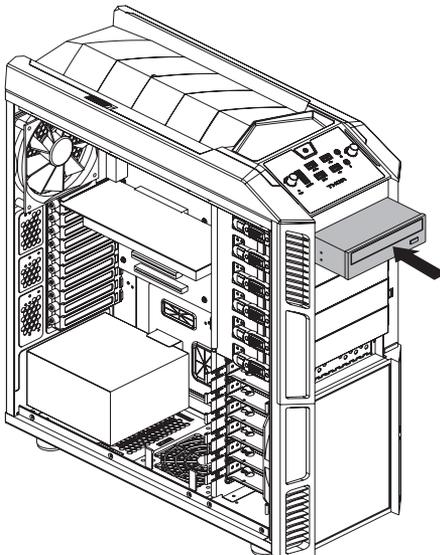

LOCK




UNLOCK




6. Installing External 3.5" Device

- 6-1. Secure the external 3.5" device onto the 5.25" to 3.5" adapter with screws.
- 6-2. Place it and the 5.25" to 3.5" bay cover to the place and secure with tool-less kit.

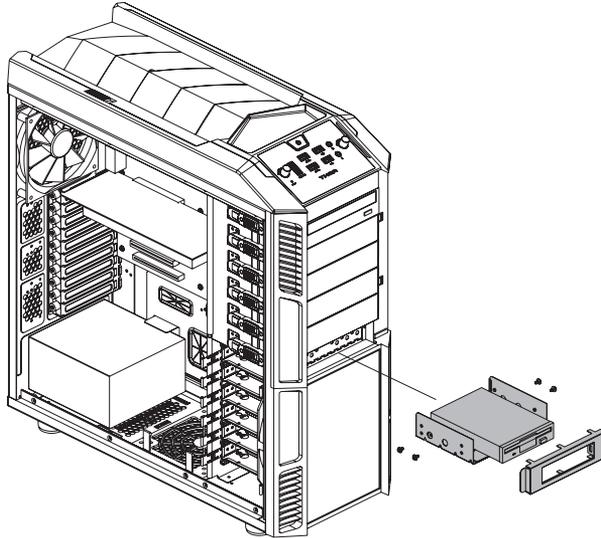

7. Installing 3.5"/2.5" HDD/SSD

- 7-1. Put the 3.5"/2.5" HDD/SSD onto the HDD tray then secure with screws.
- 7-2. Slide it into its slot and push to bottom to secure it.

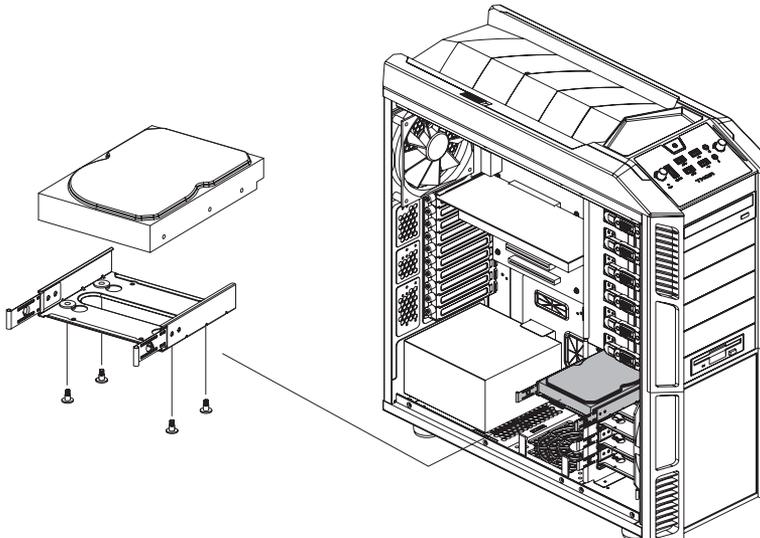

Specifications Table

Model	
Model Name	THOR V2
Features	
Type	Full Tower
Color	Black
Case Material	Steel/Plastic
Power Supply Included	No
Motherboard Compatibility	Micro-ATX, ATX, XL-ATX, E-ATX
Side Panel Window	No
Expansion	
External 5.25" Drive Bays	6
Internal 3.5" Drive Bays	6
Expansion Slots	10
Front Ports	
Front Ports	USB 3.0 x 2 USB 2.0 x 2 e-SATA x 1 Audio In/Out Fan Speed Control
Cooling System Options	
120 mm Fans	1 x Front (optional) 2 x Top (optional) 4 x Side (optional) 1 x Rear (optional) 1 x Bottom (optional)
140 mm Fans	1 x Front (optional) 2 x Top (optional) 1 x Rear (pre-installed) 1 x Bottom (optional)
230 mm Fans	1 x Front-Red LED (pre-installed) 1 x Top (pre-installed) 1 x Side (pre-installed)
Physical Specifications	
Dimensions	9.14" x 22.84" x 21.89" (W x H x D)
Weight	30.42 lb



Rosewill[®] **Technical Support Information**
techsupport@rosewill.com 1-800-575-9885

*Thank you for purchasing a quality Rosewill product.
Please register your product at : www.rosewill.com
for complete warranty information and support for your product.*