


Wooden Dual Monitor Stand


Model: MTR-S3/MTR-S3-WH
MTR-S3-ZM/MTR-S3-PINK
MTR-S3-PLE/MTR-S3-WAL



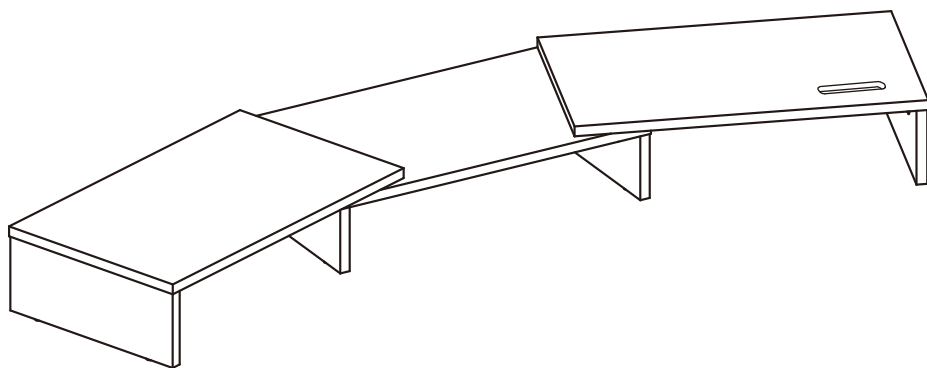

Caution: Please place the monitor riser on a flat and stable surface to avoid any wobbling or tilting of the monitor.

Parts Check-list

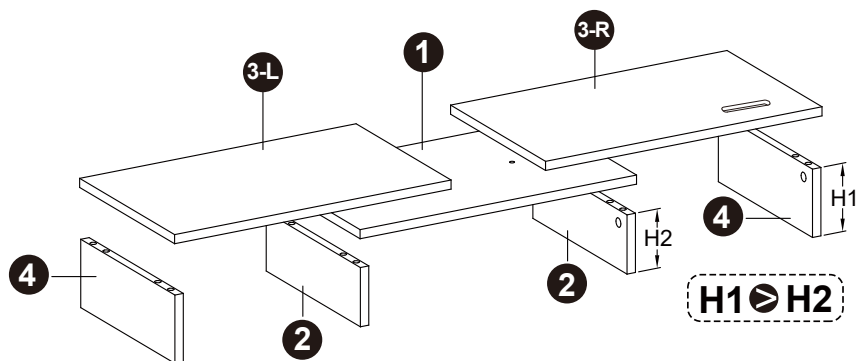

Spare Parts



A (x8)
Bolt



B (x8)
Eccentric Nut




C (x8)
Soft Pad




D (x8)
Cam Pin



E (x2)
Dowel Pin




F1 (x1) F2 (x1)
Versatile Slot

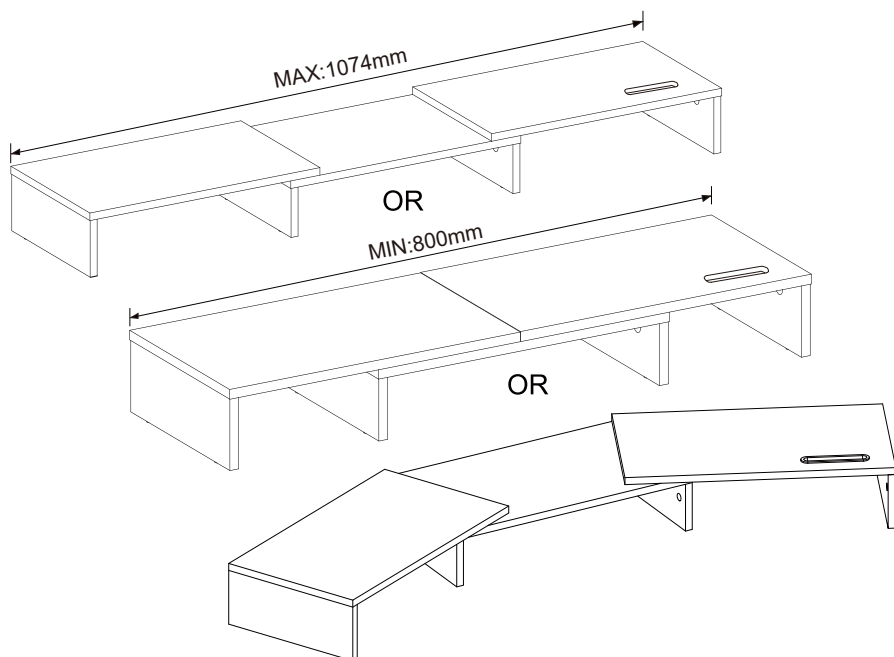


Step 1

1-1 Insert bolts (A) into desktop (1, 3-L, 3-R) and tighten them to the end with a screwdriver.

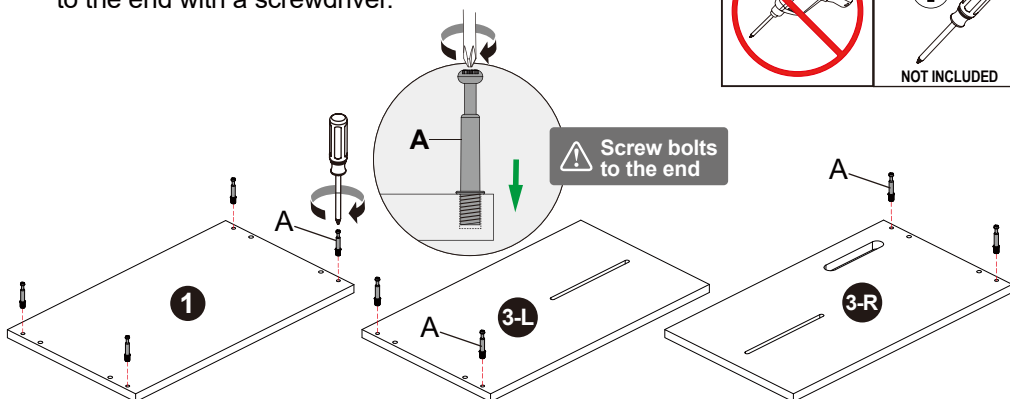


1-2 Insert the cam pins (D) into sideboards (2, 4).

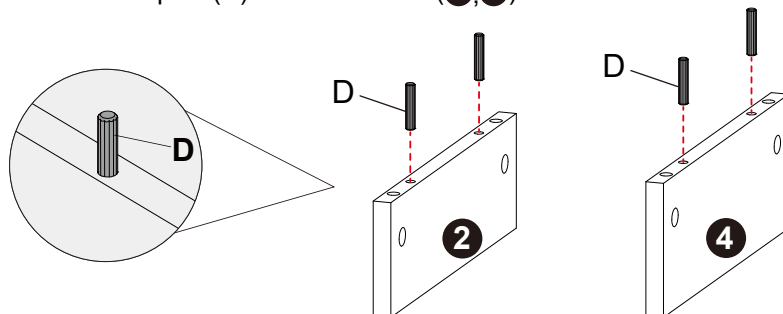


Step 2

2-1 Attach sideboards (2) to desktop (1). Insert and tighten the eccentric nuts (B), then apply 4 soft pads (C).

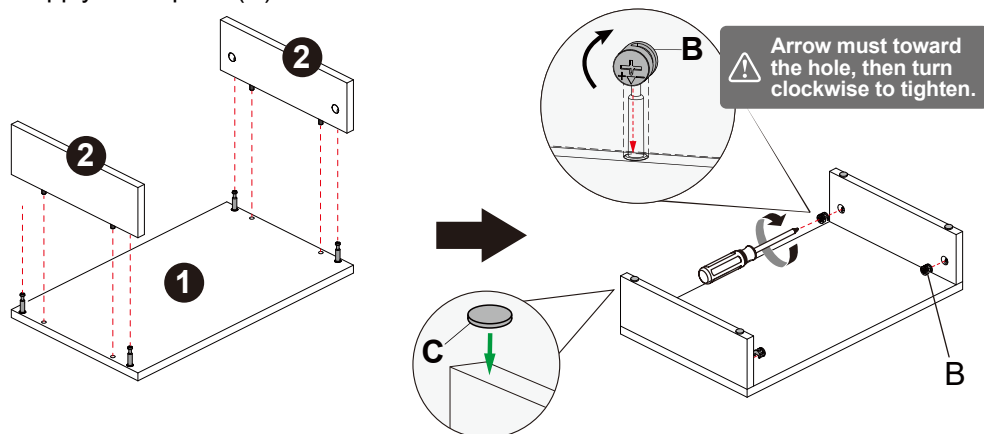

2-2 Attach sideboards (4) to desktops (3-L) and (3-R). Insert and tighten the eccentric nuts (B), then apply 2 soft pads (C) to each assembled part.

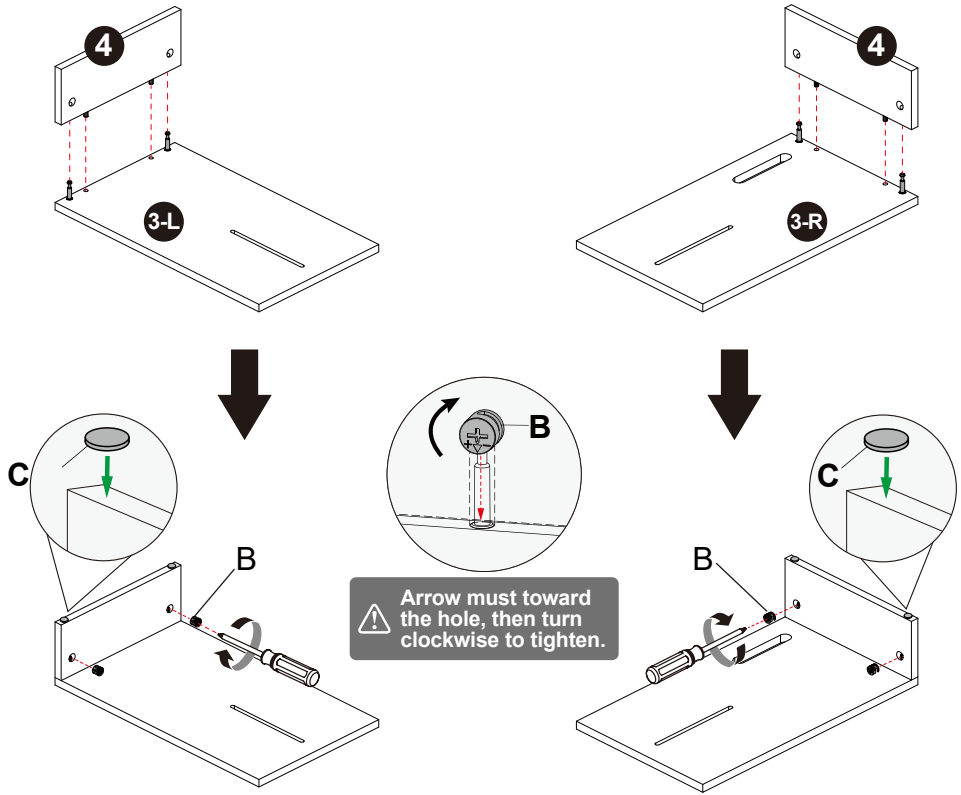

Step 3

3-1 Insert dowel pin (E) into the frame (1 + 2) using a hammer. Place the two assembled frames (3-L + 4) and (3-R + 4) on top of desktop (1).

3-2 Attach the versatile slot (F1) to desktop (3-R), then peel off the tape from (F2) and stick it to the sideboard (4).

TOOL

