

## Wireless Stereo Headset MDR-XB950B1

### Switching the sound quality mode

---

The sound quality is set to the “Priority on sound quality” mode as the default setting.

When using an SBC, AAC, or aptX compatible device, use with the “Priority on sound quality” mode.

If the connection is unstable, such as when producing only intermittent sound, select the “Priority on stable connection” mode.

#### Sound quality and indicator (blue) of each mode


When you switch the sound quality mode, the indicator flashes in blue to show the current sound quality mode.


“Priority on sound quality” mode: 3 times 

SBC, AAC, or aptX is selected automatically.

“Priority on stable connection” mode: 1 time 

SBC


- 1 Turn on the headset by pressing the  button for more than 2 seconds while holding the + or - button down.

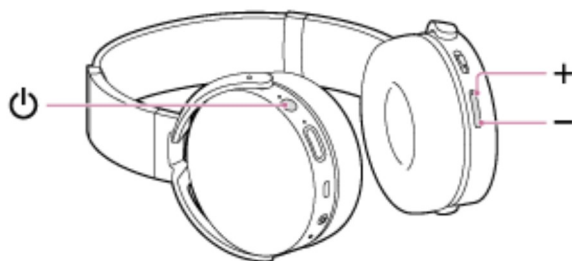


To select “Priority on stable connection,” turn on the headset while holding the - button down.

To select “Priority on sound quality,” turn on the headset while holding the + button down.

## To check the sound quality mode

While the headset is powered on, press and hold the  button, then press the + or - button within 2 seconds (before the power is turned off). The indicator will flash in blue 3 times (“Priority on sound quality” mode) or 1 time (“Priority on stable connection” mode).

### Note

When you turn on the headset by pressing the  button only, the indicator (blue) flashes two times to indicate the power-on, but the headset does not indicate the sound quality mode with flashes of the indicator (blue).

The playback time may become shorter, depending on the sound quality and the conditions under which you are using the headset.

Depending on the ambient conditions in the area where you are using the headset, intermittent sound may still occur, even if the “Priority on stable connection” mode is selected.