


Thank you for purchasing the MUQI MQ-13 Wireless Speaker. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.

## Package Contents

Wireless Speaker  
 USB-A to C Cable  
 3.5mm Audio Cable  
 User Manual

- 01 -

## Product Diagram

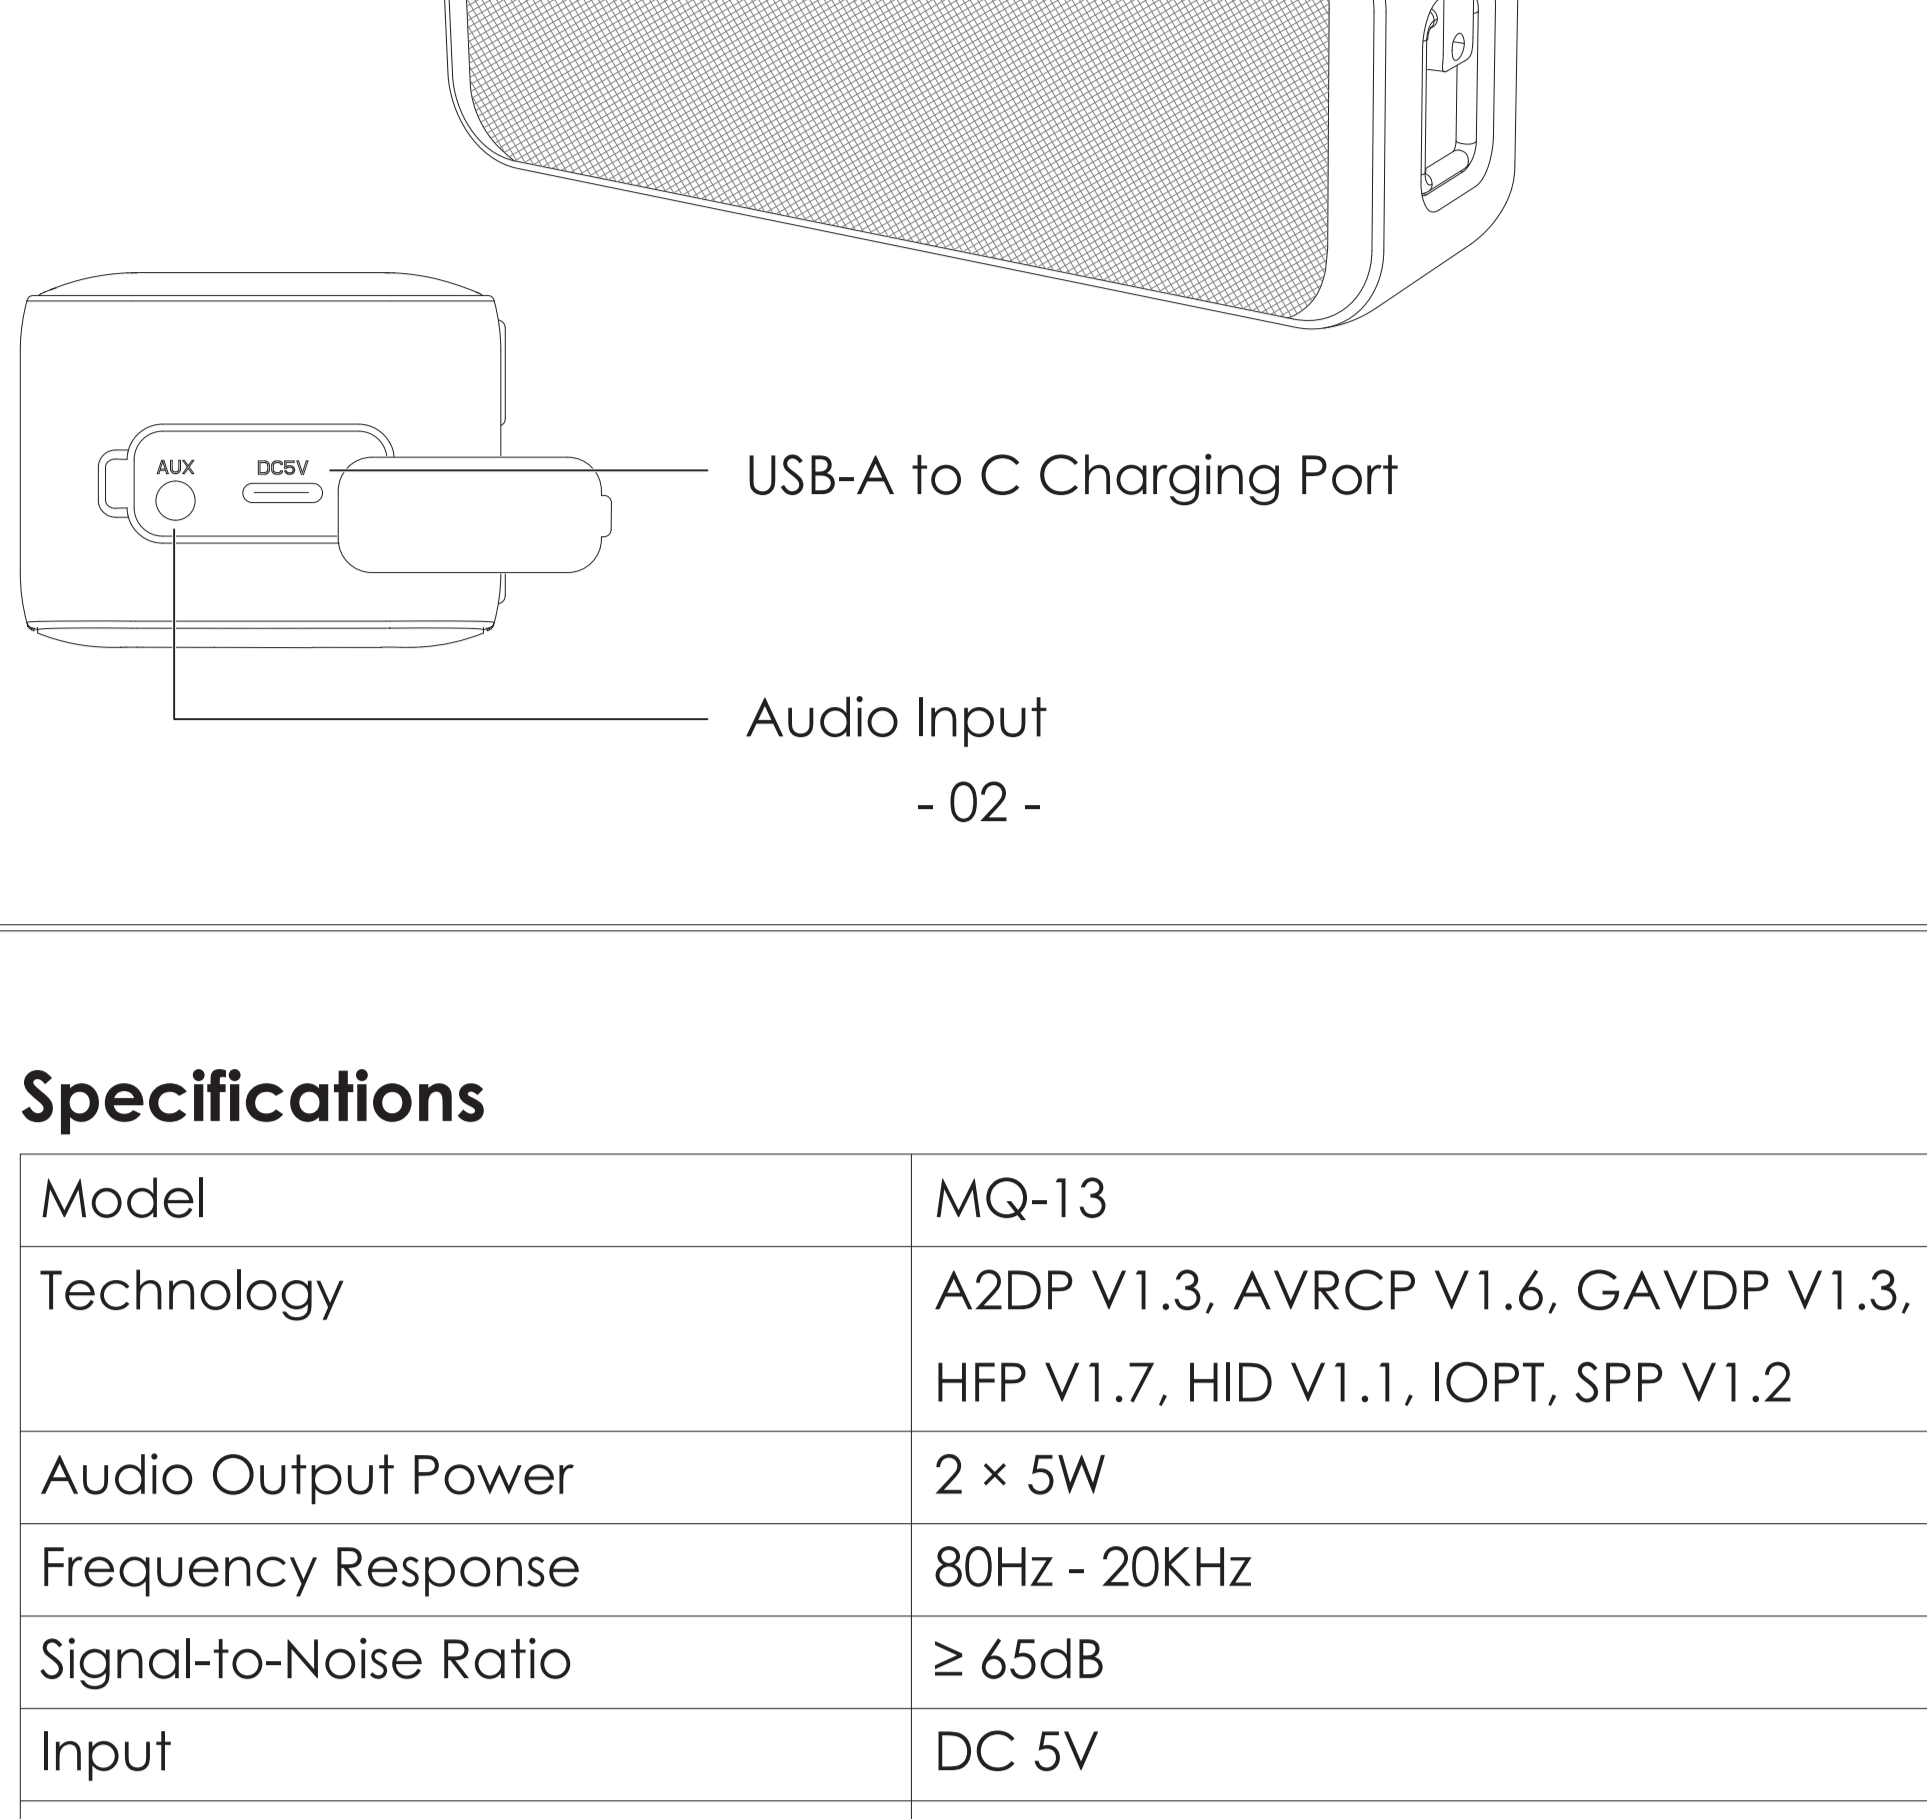

- 02 -

## Specifications

Model	MQ-13
Technology	A2DP V1.3, AVRCP V1.6, GAVDP V1.3, HFP V1.7, HID V1.1, IOPT, SPP V1.2
Audio Output Power	2 × 5W
Frequency Response	80Hz - 20KHz
Signal-to-Noise Ratio	≥ 65dB
Input	DC 5V
Charging Time	3 hours
Battery Life	28 hours (50% volume)
Battery Type	Li-ion (2200mAh)
Operating Range	Up to 33ft / 10m
Dimensions	L 175mm × W 50mm × H 67mm
Weight	360±20g

- 03 -

## Getting Started

### Charging the Speaker

Fully charge the speaker before first use. Connect one end of the USB-A to C cable to the charging input port of the MQ-13 and the other end to a USB charger or charging port to charge. The LED indicator will be solid red whilst charging and turn off when fully charged. Charging takes about 3 hours.

### Controls & LED Indicator

#### AUX Mode

Functions	Instructions
Turn speaker on / off	Press and hold the power button for 2 seconds
Adjust volume	Short-press volume + / - (synchronized with the volume of the iPhone, not Android)
Play or pause	Press the multi-function button

- 04 -

#### BT Mode

Functions	Instructions
Turn speaker on / off	Press and hold the power button for 2 seconds
Switch mode	Short-press the power button (between BT and AUX mode)
Enter or exit TWS mode	Double-click the power button
Play or pause	Short-press the multi-function button
Adjust volume	Short-press volume + / - (synchronized with the volume of the iPhone, not Android)
Skip to next/previous track	Press and hold volume + / - for 2 seconds
Answer or end the call	Short-press the multi-function button
Reject an incoming call	Press and hold the multi-function button for 2 seconds
Redial last-outgoing-called number	Double-click the multi-function button in stand-by
Disconnect BT	Long-press the multi-function button

- 05 -

#### TWS Mode

Functions	Instructions
Turn speaker on	Press and hold the power button of both speakers for 2 seconds
Turn speaker off	Press and hold the power button of any speaker for 2 seconds
Enter or exit TWS mode	Double-click the power button of the home speaker
Play or pause	Short-press the multi-function button of any of the two speakers
Adjust volume	Short-press the volume + / - of any of the two speakers (synchronized with the volume of the iPhone, not Android)
Skip to next/previous track	Press and hold volume + / - of any of the two speakers
Answer or end the call	Short-press the multi-function button of the home speaker
Reject an incoming call	Press and hold the multi-function button of the home speaker for 2 seconds
Redial last-outgoing-called number	Double-click the multi-function button of the home speaker in stand-by
Disconnect BT	Press and hold the multi-function button of any of the two speakers for 2 seconds

- 06 -

### Power On / Off

- Press and hold the power button for 2 seconds to turn on/off the speaker

### Pairing

- When you turn on the speaker, it will automatically enter pairing mode
- Activate the pairing function on your phone and select "MUQI MQ-13"
- If a code or pin is required for pairing, enter "0000" as the default code
- When successfully paired, you will hear a tone

### Note

- If you want to use another device to connect to MQ-13, please press and hold the multi-function button for 2 seconds to disconnect MQ-13 from the current device. Repeat the previous "pairing" steps
- When you turn the speaker on, it will automatically reconnect to the last-paired device or enter pairing mode if no paired device is found
- When the speaker is paused, or there is no Bluetooth connection, the speaker will automatically shut down after 10 minutes

- 07 -

- If the speaker or connected device exceeds the operating range, the speaker will disconnect. The connection to the last successfully connected device will be re-established once you re-enter the wireless range within 10 minutes. To connect to other devices, repeat the previous "pairing" steps

### Playing Audio via Audio Input Connection

Connect the MQ-13 to your PC, laptop, or other devices with the audio input port using the included 3.5mm audio cable. If the two speakers are in TWS mode, please connect the home speaker to the device you need using the included 3.5mm audio cable

### Note

- The speaker will disconnect from your phone or other paired devices when an audio cable is plugged into the audio input jack. Short-press the power button to switch back to BT mode

- 08 -

- When playing audio using the audio input jack, press the volume + / - to adjust the volume and short-press the multi-function button to pause or resume. Next/previous track control on the speaker is disabled in audio input mode
- For some computers, you may need to access the audio control panel to manually set the speaker as the default audio device

### TWS Mode

- Turn on two MQ-13 speakers at the same time, double-click the power button of one of the speakers to automatically enter the TWS pairing mode, a tone will be heard every three seconds
- During the TWS pairing process, double-click the power button to cancel the TWS pairing. If the TWS pairing exceeds 60 seconds and the TWS pairing is not successful, it will automatically return to the normal BT mode
- After the TWS pairing is successful, one of the LED lights of the two speakers is always on (this is the satellite) and the other is flashing (this is the home), and the TWS pairing success tone is the same as the BT connection success tone

- 09 -

- Activate the pairing function on your phone or other compatible device and select "MQ-13"
- If a code or pin is required for pairing, enter "0000"
- When successfully paired, you will hear a tone

### Note

- When the phone is connected to the Bluetooth of one of the speakers first, you need to double-click the power button of the speaker connected to the phone to enter the TWS pairing mode
- After the TWS pairing is successful, double-click the power button of one of the speakers to automatically exit the TWS pairing mode, and the BT connection between the home speaker and phone will not disconnect. Double-click the power button of the home speaker to enter TWS pairing mode

- 10 -

- If the Bluetooth of the two speakers and the mobile phone is connected successfully, cancel the Bluetooth connection between one of the speakers and the mobile phone. Double-click the speaker that is successfully connected to the phone to enter the TWS pairing mode
- In TWS mode, directly press and hold the power button for 2 seconds to turn off, and the MQ-13 TWS will automatically connect back after the power is back on. If you double-click the power button to disconnect the TWS pairing, the TWS will need to be manually connected if you turn the device off
- If the two speakers or connected device exceeds the operating range, the speaker will disconnect. The connection to the last successfully connected device will be re-established once you re-enter the wireless range within 10 minutes. To connect to other devices, repeat the previous "pairing" steps

- 11 -

## FAQ

### The TWS pairing is unsuccessful?

Please check if the phone is connected to the Bluetooth of the two speakers at the same time. If yes, please long press the multi-function button of any of the two speakers to disconnect any speaker BT from the phone. Double-click the power button of the speaker that is connected to the phone to enter TWS pairing mode. If not, please double-click the power button of both speakers to enter TWS pairing mode.

### From TWS mode to AUX mode?

Connect the home speaker to the required equipment with an audio cable. Press the power button to switch back to Bluetooth mode.

- 12 -

## Product Care & Use

- Keep away from extreme heat and strong magnetic fields
- Do not use this speaker at high volume for extended periods, as this may cause permanent hearing damage or hearing loss

## Warranty & Customer Support

For questions, support, or warranty claims, contact us at the address below that corresponds with your region. Please include your Amazon order number and product model number

**E-mail:** sales@szmuqi.com

\*Please note, MUQI can only provide after-sales service for products purchased directly from MUQI. If you have purchased from a different seller, please contact them directly for service or warranty issues.

- 13 -