




## Fosmon Outdoor Countdown Timer w/ Photocell, Remote Control and 2 US Socket Outlet – Black

Thank you for purchasing this Fosmon product. This guide will help you to familiarize yourself with all the features and functions of the product.

### Disclaimer Statement

We are not liable for any damage or destruction to personal properties that are contained inside or outside of the Fosmon product. We are not liable to you or anyone else for any loss, injury, or damages relating to this product.

### Timer/Remote

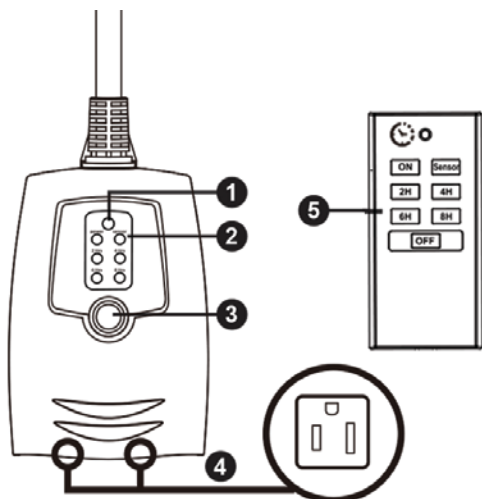

1. Sensor: Sensor will turn receiver on at dusk and off at dawn.
2. Timer Mode: Timer will turn ON, 2, 4, 6, or 8 hours after dusk.
3. Manual Select Button: Selects timer modes manually.
4. 2 grounded outlets.
5. 7 function remote inputs.

### Installation

1. Mount or hang the RECEIVER on the wall near a GFCI protected outlet (125V 60Hz)
2. Plug in the device

*NOTE: The device must be mounted in a vertical position with the receptacles facing downward and at least 2 feet above ground level.*

### Operation

ON: Power is ON to attached devices

OFF: Power is OFF to attached devices

Sensor(Dusk - Dawn): power will turn on at dusk and remain on until dawn

2 Hrs: Power will turn on at dusk and remain on for 2 hours


4 Hrs: Power will turn on at dusk and remain on for 4 hours

6 Hrs: Power will turn on at dusk and remain on for 6 hours

8 Hrs: Power will turn on at dusk and remain on for 8 hours

*Note: In the dusk-to-dawn mode, temporary light sources like headlights, porch lights and other external light sources will not interfere with the photocell function unless the external light source is on for more than 15 minutes. In that case, the timer will shut off until darkness is restored.*

### Battery Placement

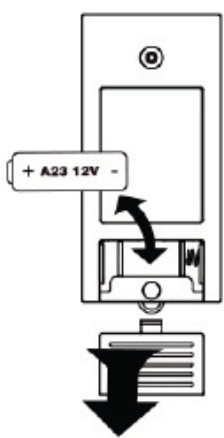

1. Remove the Battery Compartment Cover from the back of the Remote Control
2. Remove the spent battery and replace with a new A23 12V battery

### Package Includes

- 1x Outdoor Countdown Timer
- 1x Remote
- 1x Quick Start Guide

### Specifications

- 125 V ac 60 Hz, 15 A Resistive
- 15 A General Use, 1000 W Tungsten
- 500 VA Electronic Ballast
- 1/2HP 120V AC 60 Hz
- 8.3 A Ballast
- Remote Battery: A23G 12V
- Remote Range: 100ft (33m)
- UL 60730-1 Certified
- Operating Temp: -40°F~104°F/ -40°C~40°C

### Follow Us On Social Media



[www.fosmon.com](http://www.fosmon.com)

[support@fosmon.com](mailto:support@fosmon.com)

© 2018 Fosmon Inc. All rights reserved.

All trade names are registered trademarks of respective manufacturers listed.

### Recycling the Product

To dispose this product properly, please follow the recycling process regulated in your area.

*WARNING: This product can expose you to DINP which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).*

### FCC Information

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



### DO NOT RETURN THE PRODUCT

There are good days and there are bad days. It is our BAD if the product is not working, or if you are not happy with it. PLEASE GIVE US A CHANCE and WE WILL MAKE IT RIGHT.

1-833-3-Fosmon (833-336-7666)

(612) 435-7508

[support@fosmon.com](mailto:support@fosmon.com)