


XenonLab

USER MANUAL

HAP-607

True HEPA Air Purifier

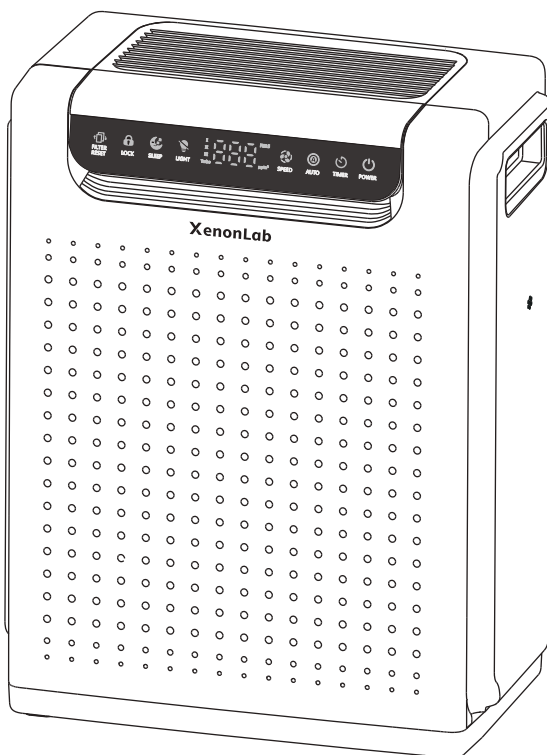

PLEASE KEEP THIS MANUAL CAREFULLY FOR FUTURE REFERENCE.
FOR HOUSEHOLD USE ONLY.

TABLE OF CONTENTS


1. General Safety	1
2. Product Map	3
3. Controls & Display	4
4. What' s in The Box	6
5. Getting Started	7
6. Using Your Air Purifier	9
7. About The Filter	12
8. Care & Maintenance	13
9. Specifications	15
10. Troubleshooting	16
11. Warranty	17

General Safety

- XenonLab HAP-607 Air Purifier is electrical appliance for indoor use only.
- Take the necessary precautions to reduce the risk of fire, electric shock or injury.
- **READ AND SAVE THESE INSTRUCTIONS.**
- **WARNING** - To Reduce the Risk of Fire or Electric Shock, Do Not Use This Air Purifier With Any Solid-State Speed Control Device.
- Only use your air purifier as described in this manual.
- Do not use without removing the plastic wrap from the Main Filter. The air purifier will not filter air and may overheat, causing a fire hazard.
- Keep your air purifier away from water, and wet or damp areas. Never place in water or liquid.
- Do not use in excessively humid areas.
- Keep your air purifier away from heat sources.
- Do not use where combustible gases, vapors, metallic dust, aerosol (spray)products, or fumes from industrial oil are present.
- Keep 5 ft / 1.5 m away from where oxygen is being administered.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

- Do not allow children to play with the plastic packaging. Immediately discard the plastic after unwrapping the filter.
- Do not place anything into any opening on the air purifier.
- Do not sit or place heavy objects on the air purifier.
- Keep the inside of the air purifier dry. To prevent moisture buildup, avoid placing in rooms with major temperature changes.
- Always unplug your air purifier before servicing (such as changing the filter).
- Do not use your air purifier if it is damaged or not working correctly, or if the cord or plug is damaged. Do not try to repair it yourself.
- Children should not clean or perform maintenance on the air purifier without supervision.
- Keep the appliance, including the power cable, at a safe distance from heated surfaces and open fire.
- Never clean with gasoline, chemical solvents, or corrosive materials as these agents may damage the air purifier.
- Do not cover the cord with a rug, carpet, or other covering. Do not place the cord under furniture or appliances.
- Keep the cord out of areas where people walk often. Place the cord where it will not be tripped over.
- This air purifier is only to be used with the power supply adapter provided with the air purifier.


Product Map

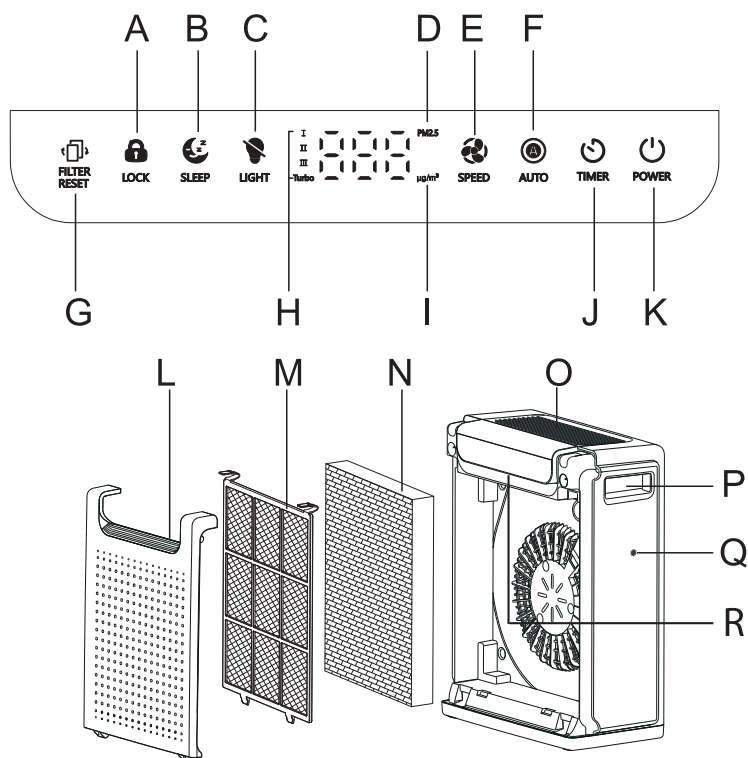

- A. Display Lock Button
- B. Sleep Mode Button
- C. Air Quality Indicator Off/On Button
- D. PM2.5 Indicator
- E. Fan Speed Button
- F. AUTO Mode Button
- G. Filter Change Indicator & Reset Button
- H. Fan Speed Indicator
- I. Unit Indicator


- J. Timer Button
- K. On/Off Button
- L. Front Cover
- M. Washable Pre-Filter
- N. Main Filter
- O. Air Outlet
- P. Carry Handle
- Q. Dust Sensor
- R. Air Quality Indicators

Controls & Display

 POWER	On/Off Button • Turns the air purifier on/off.
 SPEED	Fan Speed Button • Cycles through fan speeds: Low (I will light up), Medium (II), High (III), and Turbo (Turbo), Low (I).
 SLEEP	Sleep Mode Button • Tap to switch to Sleep Mode, the display will turn off except   after 3 seconds. • Sleep Mode operates quietly by using a fan speed lower than Low speed.
 TIMER	Timer Button • 24h available. 1-hour increments. 1h-2h-3h...-24h. Note: • The timer indicator will light up when timer on. • Under setting status (display flash), press and hold  for 3 seconds until display shows "0H", timer canceled successfully.
	Display • To display the Fan Speed, PM 2.5, Timer.
 LIGHT	Air Quality Indicator Off/On Button • Turns the Air Quality Indicator off. • When lights off, tap to turn back on.

 AUTO	Auto Mode Button • Turns Auto Mode on.
 FILTER RESET	Change Filter Indicator & Reset Button • Lights up red when the Main Filter should be changed. • To reset the filter life (after changing filter), press and hold  for 5 seconds. The indicator will flash and beep for 2 times, and turn off. Filter life reset successfully.
 LOCK	Display Lock • Prevents current settings from being changed. Press and hold  for 3 seconds to lock and unlock the display. • When the display is locked, the display lock button will flash and beep when any other button is tapped to indicate the display is locked.

What's in The Box

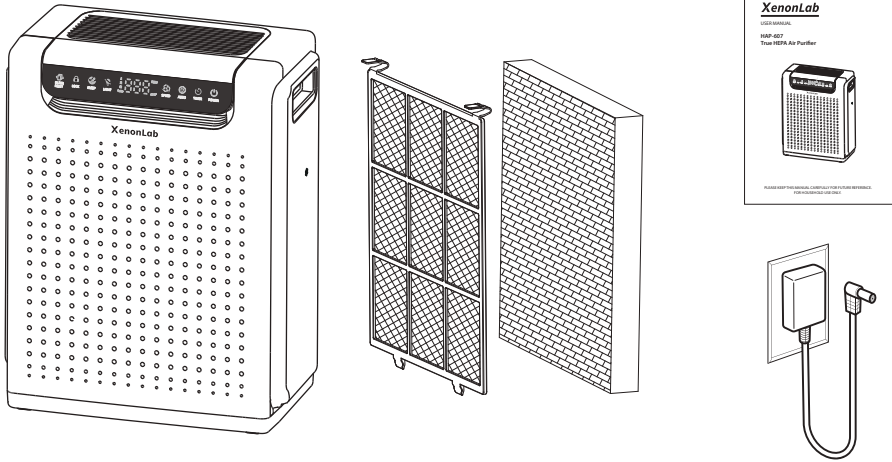


- 1x** Air Purifier
- 1x** Adapter (In the bottom of air purifier)
- 1x** Washable Pre-Filter (Pre-installed)
- 1x** Main Filter (Pre-installed, protected by plastic wrap,
it must be removed before first use.)
- 1x** User Manual

Getting Started


Warning: Before first use, the plastic packaging of the Main Filter must be removed.

1. Place the air purifier on a flat, stable surface such as the floor.
2. Pull both sides of the front cover to remove it.

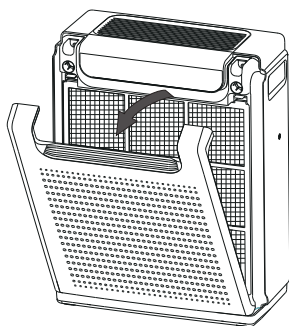


3. Remove the Washable Pre-Filter and Main Filter.

Note: Push the pre-filter's tabs downwards and pull to remove the pre-filter from the air purifier.

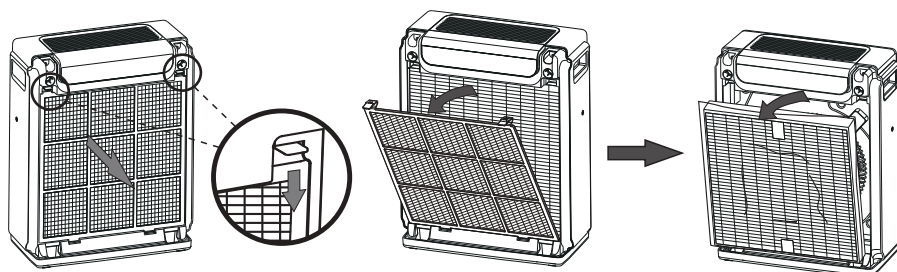

4. Remove the plastic packaging from the Main Filter and place back into the air purifier.

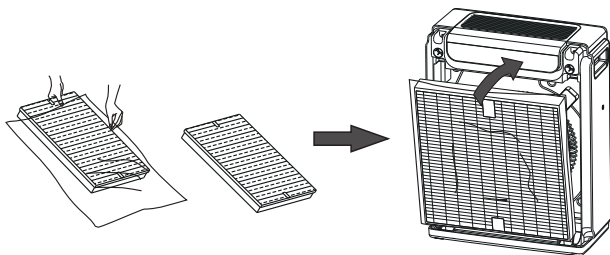


Note:


Be sure to remove the main filter packaging before use. Otherwise the air purifier will not filter the air and may overheat, causing a fire.

Make sure the side marked with "**FRONT**" is facing outward when you insert the main filter.

5. Replace the Washable Pre-Filter.

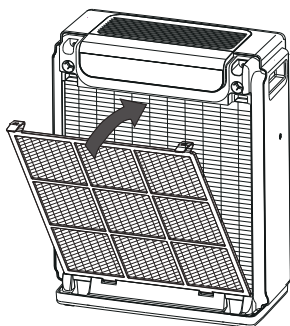


6. Replace the front cover. Make sure to align the tabs on the cover with the slots on the bottom of the air purifier.

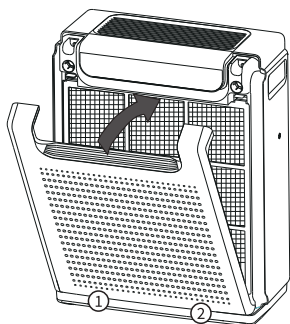

7. Insert the power adapter plug into the back of the air purifier.

Note: The power adapter is underneath the air purifier.

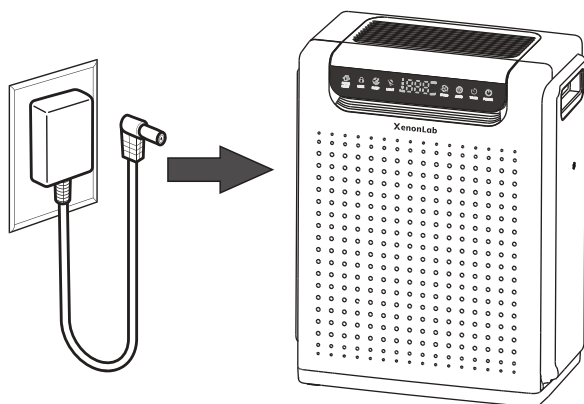

Using Your Air Purifier

Warning: Before first use, the plastic packaging of the Main Filter must be removed.

1. Plug in and tap  to turn on the air purifier. The air purifier will start on **AUTO** mode by default.
2. Tap  to change fan speed between Low (I will light up), Medium (II), High (III), and Turbo (**Turbo**).

Note:

- Turbo speed (**Turbo**) is the loudest, but cleans air the quickest.
- For best results, or to address a specific air quality issue such as smoke, run the air purifier on Turbo speed for 15-20 minutes before using a lower speed.
- To effectively clean air, keep windows and doors closed while the air purifier is on..

Sleep Mode

Sleep Mode operates quietly by using a fan speed lower than Low speed.

1. Tap  to switch to Sleep Mode.
2. Sleep Mode will turn off the display except   (semi bright) after 3 seconds if no other buttons are tapped.

Note:

- When the display is turned off, tap any button to turn the display back on. If you don't tap another button, the display will turn off again after 3 seconds.

Auto Mode

Auto Mode uses an infrared dust sensor inside the air purifier, to adjust the fan speed automatically based on air quality. For example, if the air quality is bad, the fan will automatically be set to speed **Turbo**.

1. Tap  to turn Auto Mode on.
2.  will light up while Auto Mode is on.

Air Quality Indicator Chart		
Light Color	Air Quality	Auto Mode Fan Speed
Green	Very Good	I
Blue	Good	II
Orange	Moderate	III
Red	Bad	Turbo

Timer

You can manually set the timer for 1-24 hours using the  button.

1. Tap  repeatedly to select a time. The timer will start automatically.
2. To cancel the timer, under setting status (display flash), press and hold  for 3 seconds until display shows "0H", timer canceled successfully.

Note:

The timer will restart if the time is changed.

Air Quality Indicator

This turns off the air quality indicator.

1. Tap  to turn off the air quality indicator.
2. Tap  to turn back on.

Display Lock

When the air purifier is on, you can lock the display to prevent settings from being accidentally changed. Buttons will not respond to being tapped.

1. Press and hold  for 3 seconds to lock the display. The Display Lock Indicator will light up.
2. The display lock Indicator will blink and beep when any other button is tapped to indicate that display lock is on.

3. Press and hold  again for 3 seconds to unlock the display. The Display Lock Indicator will turn off.

Memory Function

When the air purifier is turned off (but plugged in), it will remember its previous settings when turn back on.


Note: The air purifier will not remember timers.

Standby Mode

The air purifier is in Standby Mode when it is turned off, but plugged in.

About The Filter

The air purifier uses a 3-stage filtration system to purify air.

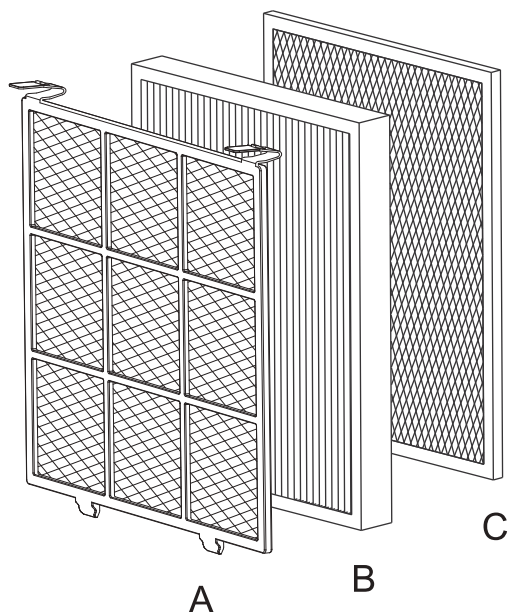

A. Washable Pre-Filter

- Captures large particles such as dust, lint, fibers, hair, and pet fur.
- Maximizes the filter's life by protecting it.
- Removable and washable to increase filtering efficiency (see **Cleaning the Pre-Filter**).

B. True HEPA Filter

- Filters small particles such as fine dust, smoke particles, and allergens such as pollen and pet dander.

C. Activated Carbon Filter

- Helps captures and neutralizes cooking smell, smoke, odors, fumes and VOCs.

Care & Maintenance

Cleaning the Air Purifier

- Unplug before cleaning.
- Wipe the outside of the air purifier with a soft, dry cloth. If necessary, wipe the housing with a damp cloth, then immediately dry.
- Vacuum the inside of the air purifier.
- Do not clean with abrasive chemicals or flammable cleaning agents.

Cleaning the Pre-Filter


- The Washable Pre-Filter should be cleaned approximately every 2–4 weeks to increase efficiency and extend the life of your filter.
- Clean the Pre-Filter using a soft brush or vacuum hose to remove hair, dust, and large particles. Optionally, you can wash the Pre-Filter with water and a mild detergent to remove dirt and dust.

Note:


- Avoid scrubbing, scraping, or vigorously brushing the Pre-Filter.
- Do not use abrasive cleaning materials.

To wash the Pre-Filter:

1. Unplug before the air purifier.
2. Open the front cover (see **Getting Started 2.**).
3. Press the Pre-Filter's tabs downwards and pull to remove the Pre-Filter.
4. Clean the surface of the Pre-Filter with a vacuum.
5. Rinse the Pre-Filter with water under a faucet.
6. Wash the Pre-Filter with mild detergent and a soft cloth.

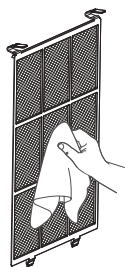

7. Allow the Pre-Filter to air-dry. Once completely dry, place the Pre-Filter back into the air purifier.

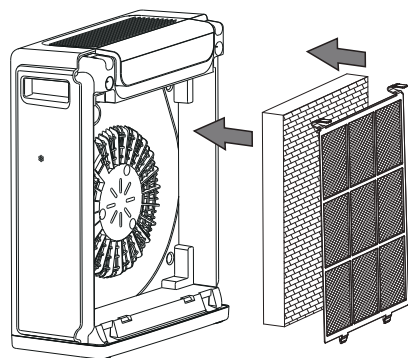

Filter	When to Clean	How to Clean	When to Replace
Washable Pre-Filter	Every 2-4 Weeks.	Use a soft cloth or vacuum hose.	Does not need to be replaced.
		Wash with water and mild detergent.	
Main Filter	Do not clean.		Approximately 6-12 months.

Replacing the Main Filter

When the indicator lights up, the Main Filter should be changed.

To change the Main Filter:

1. Unplug the air purifier, then pull the front cover to remove it (see **Getting Started 2.**).

2. Remove the Pre-Filter from the air purifier.

Note: Washable, does not need to be replaced.

3. Remove the Main Filter from the air purifier.

4. Clean out any remaining dust or hair inside the air purifier using a vacuum hose.

Note: Do not use water or liquids to clean the air purifier.

5. Remove the plastic packaging from the new filter and place the filter inside the air purifier (see **Getting Started 4.**).

Note: Make sure the side marked with “**FRONT**” is facing outward when you insert the filter.

6. Replace the Pre-Filter and front cover.
7. Plug in and turn on the air purifier. Reset the filter life.
- To reset the filter life (after changing filter), press and hold  for 5 seconds. Indicator will turn off when successfully reset.
- Note:** To maintain the performance of your air purifier, only use official **XenonLab** filters.

Storage

If not using the air purifier for an extended period of time, wrap both the air purifier and the filter in plastic packaging and store in a dry place to avoid moisture damage.

Specifications

MODEL	HAP-607	
POWER SUPPLY	INPUT	AC 100-240V 50-60Hz
	OUTPUT	DC 24V 1.5A
PRODUCT DIMENSION	12.6*6.1*15.8 in / 32.0*15.5*40.2 cm	
NET WEIGHT	6.72 lb / 3.05 kg	
PACKAGE DIMENSION	13.6*6.9*16.9 in / 34.5*17.9*43.0 cm	
GROSS WEIGHT	7.98 lb / 3.62 kg	
OPERATING TEMPERATURE	10-104°F / -10-40°C	
OPERATING HUMIDITY	≤85% RH	

Troubleshooting

Problem	Reasons	Possible Solutions
Air purifier cannot be turned on or respond to button controls.	No electricity.	Check that the unit is properly plugged into an electrical outlet.
	The air purifier malfunctioned.	Contact XenonLab: support@myxenonlab.com
	Power cord is damaged.	
	The outlet is damaged.	Try a different outlet.
Airflow is significantly reduced.	The airflow is blocked by plastic wrap of filter. Note: The Main Filter was pre-installed protected by plastic wrap.	The plastic wrap of Main Filter must be removed before first use.
	There is no enough clearance for the air comes in.	(1) Leave 12inch / 30cm clearance on all sides of the air purifier. (2) Keep air purifier away from anything that would block airflow, such as curtains.
	The Pre-filter maybe clogged by large particles so that the airflow is blocked.	Clean the Pre-filter or replace the filter. Refer to Care & Maintenance .
Air purifier makes an unusual noise while the fan is on.	The airflow is blocked by plastic wrap of filter.	The plastic wrap of Main Filter must be removed before first use.
	Appliance is on uneven place.	Make sure the air purifier is operating on a hard, flat, even surface.
	Appliance may be damaged, or foreign object inside.	Contact XenonLab: support@myxenonlab.com
Strange smell comes from the purifier.	It is time to clean/replace the Main Filter.	Clean the Pre-Filter or replace the Main Filter.
		The plastic wrap of Main Filter must be removed before first use.
	Appliance worked in an area with a humidity level above 85% RH. The surface of the Main Filter will become moldy.	(1) This air purifier should be used in an area with a humidity level below 85% RH. (2) Replace your Main Filter.
Poor air purification quality.	A low speed is used When air is in the high pollution.	Increase the fan speed.
	(1) The airflow is blocked by plastic wrap of Main Filter. (2) The airflow of inlet/outlet is blocked.	(1) The plastic wrap of Main Filter must be removed before first use. (2) Make sure no objects are blocking the front or top of the air purifier (the inlet or outlet).
	Windows or doors not closed.	Keep windows and doors closed while the air purifier is on.

Air purifier always detects high levels of particulates.	The unit is operating in a very dusty environment.	Consider turning the fan speed to Turbo .
 is still on after replacing the main filter.	Forget to reset the filter life.	Press and hold  for 5 seconds to reset the filter life.
 has not turned on after 9 months.	The appliance is run infrequently or the air is in good quality so that it takes longer to inform you.	The indicator will turn on depending on how often you use your air purifier. If you don't use your air purifier often, it will take longer to turn on.
 turned on before 6 months.	The appliance is run frequently or the air is in the high pollution so that it takes shorter to inform you.	Replace the Main Filters.

Warranty

We are delighted that you have chosen the XenonLab air purifier and hope you have a fun with it. The manufacturer's warranty covers the product for a period of 12 months from the date of purchase against manufacturing faults.

If you have any questions about the device and about spare parts/accessories, contact the customer service department via:



support@myxenonlab.com



www.myxenonlab.com



<https://www.facebook.com/XenonLab>



1(888)610-8877
(Mon-Fri 9:00-17:00 EST)

Through the following channels,
you can quickly contact us.



support@myxenonlab.com



www.myxenonlab.com



<https://www.facebook.com/XenonLab>



1(888)610-8877

(Mon-Fri 9:00-17:00 EST)