
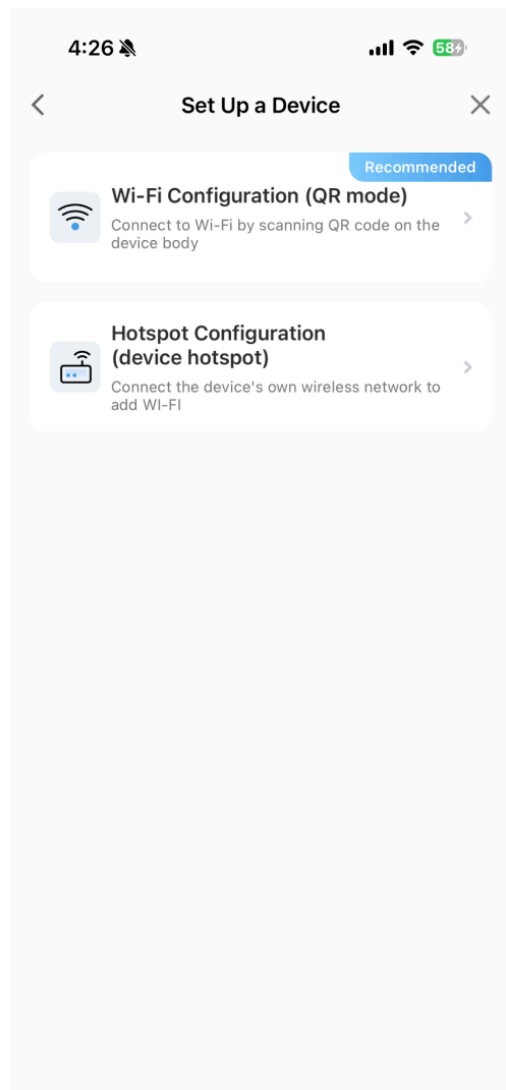


How to setup B200-SE



Wi-Fi Configuration Step1

Download the Noorio App from the app store, open the app. Scan the QR code on the back of the camera, and click "Set Up a Device." Select "Wi-Fi Configuration (QR mode)."

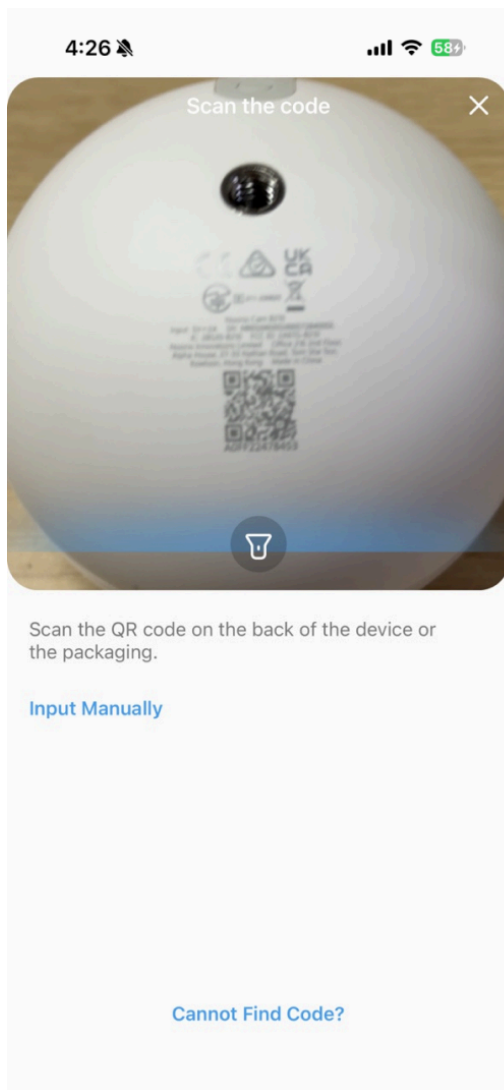



Wi-Fi Configuration Step2

- Select the Wi-Fi network you want to pair with (Note: Only **2.4GHz** networks are supported).
- Press and hold the SYNC button (more than 10 seconds) on the back of the camera until you hear a voice prompt.
- **The blinking blue light in the app's picture is just an example, the actual blinking red light also allows for successful pairing. (Device indicator color does not affect the addition, at present we are still optimizing the B200-SE to improve the performance of the B200-SE)**

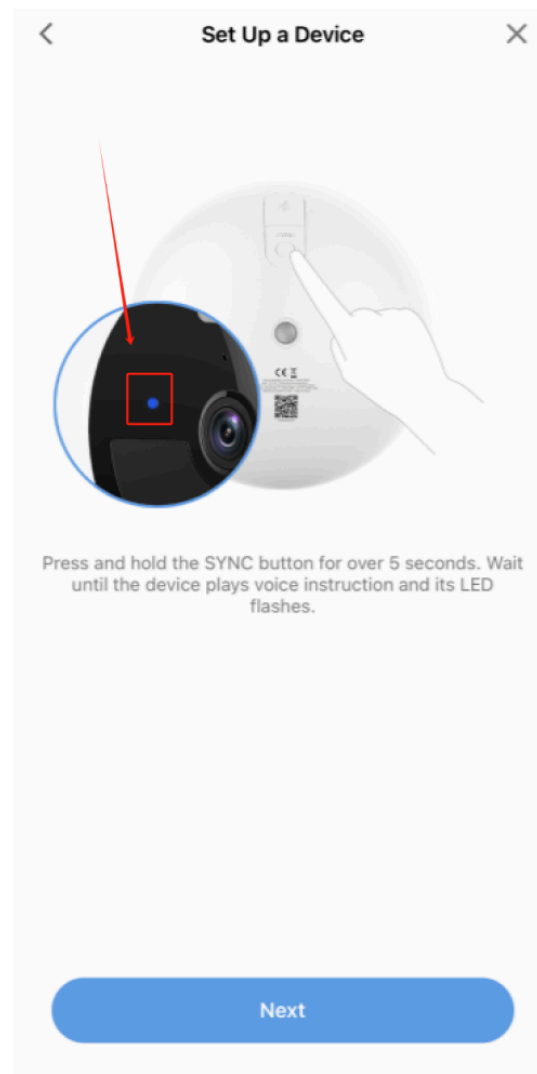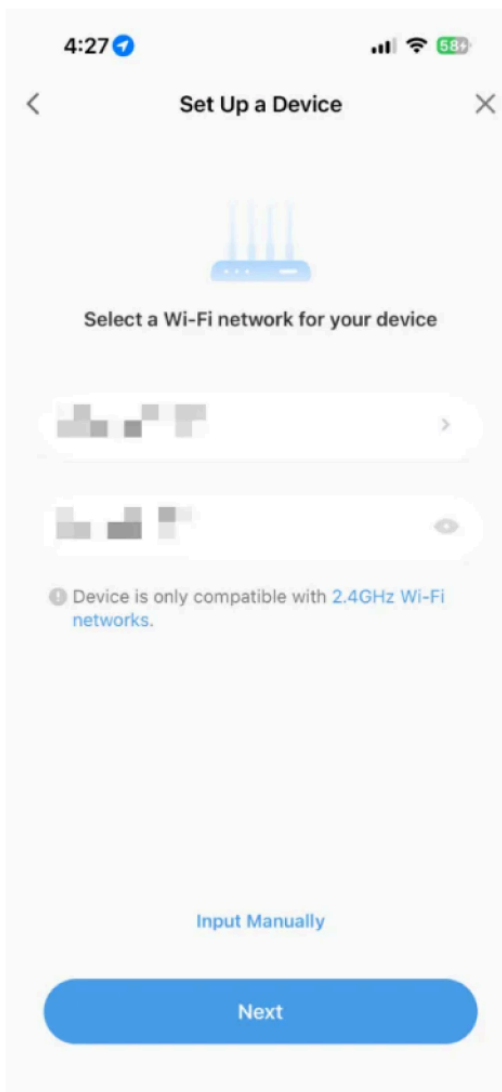



Wi-Fi Configuration Step3

Point your camera lens at the QR code displayed on the app, keeping a distance of 6–8 inches. After hearing the camera's prompt, click "Hear the Prompt." Wait for the camera to pair successfully.

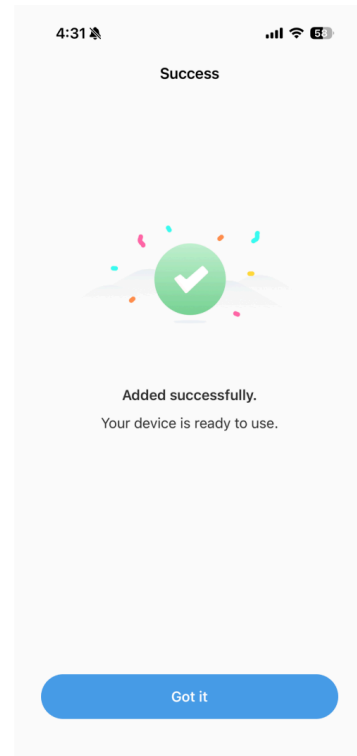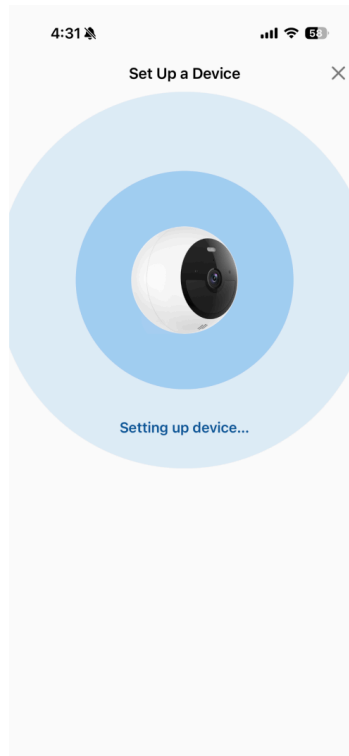



Hotspot Configuration Step1

Download the Noorio App from the app store, open the app. Scan the QR code on the back of the camera, and click "Set Up a Device." Select "Hotspot Configuration (device hotspot)."

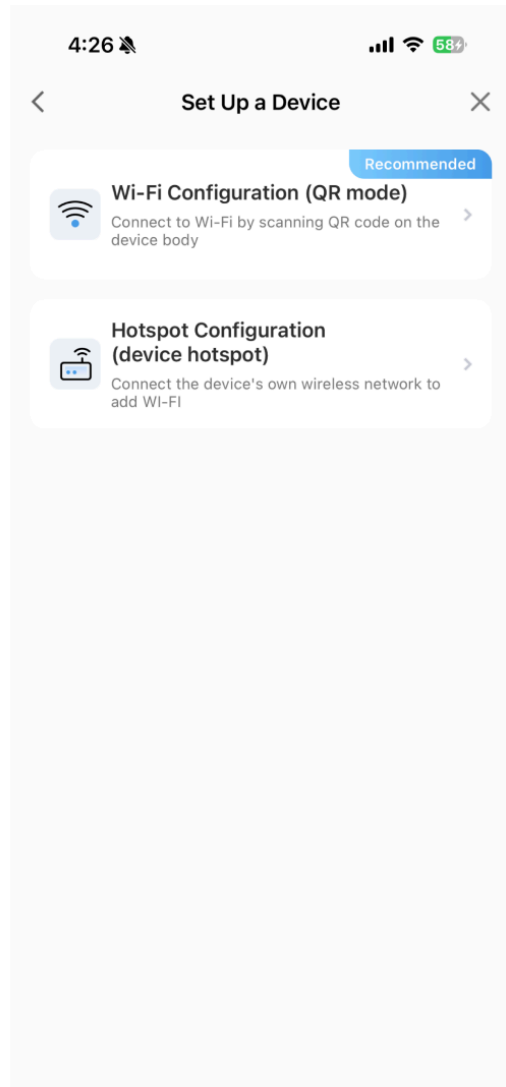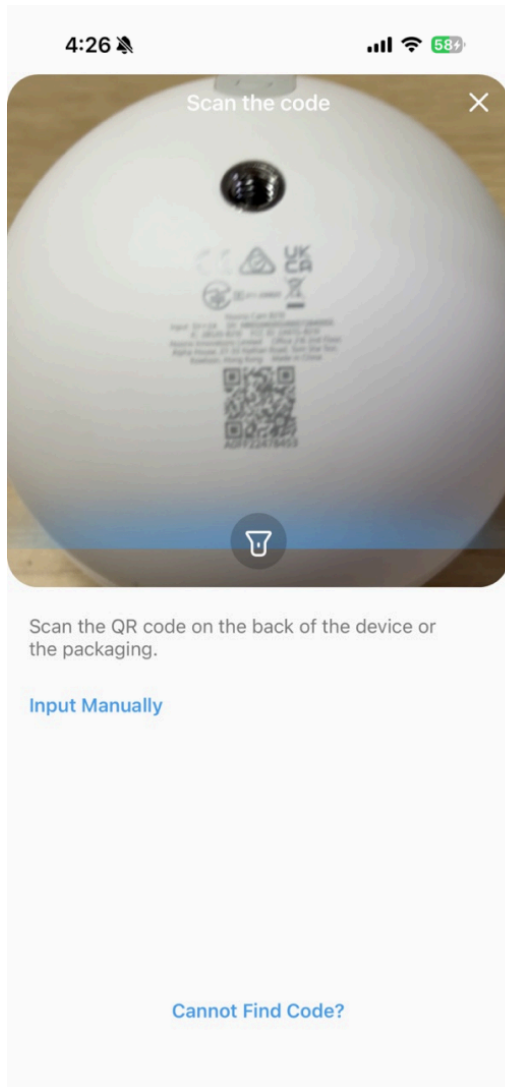



Hotspot Configuration Step2

Select the Wi-Fi network you want to pair with (Note: Only 2.4GHz networks are supported). Press and hold the SYNC button on the back of the camera until you hear a voice prompt.

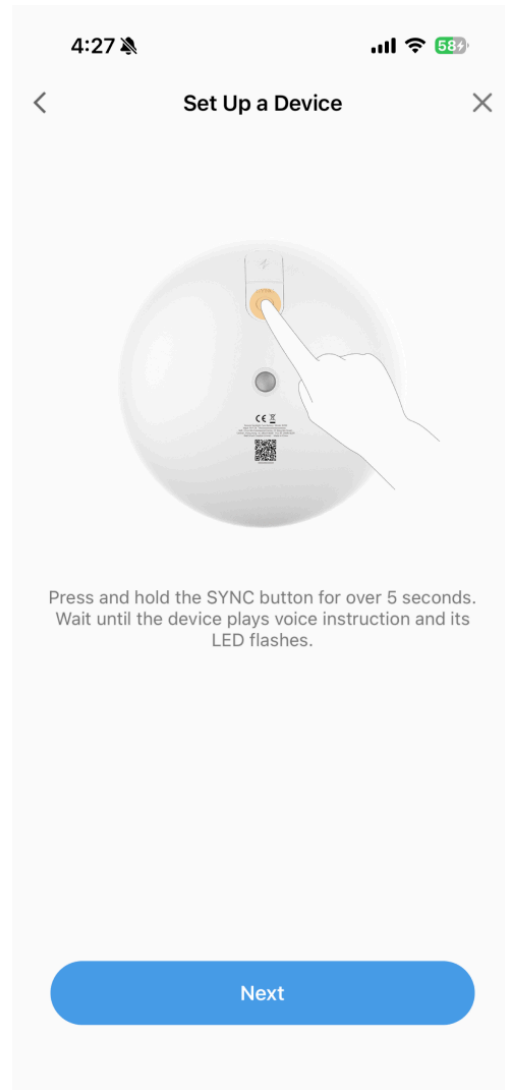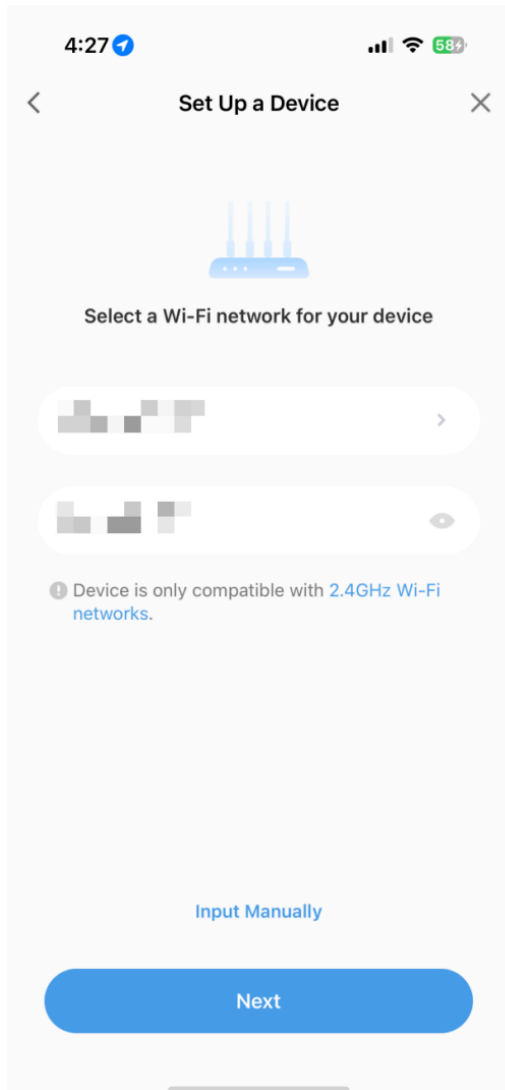

Hotspot Configuration Step3

Select "Connect Device Wi-Fi," go to your phone's network settings, and connect to the "Cloud_xxxxxx" network.

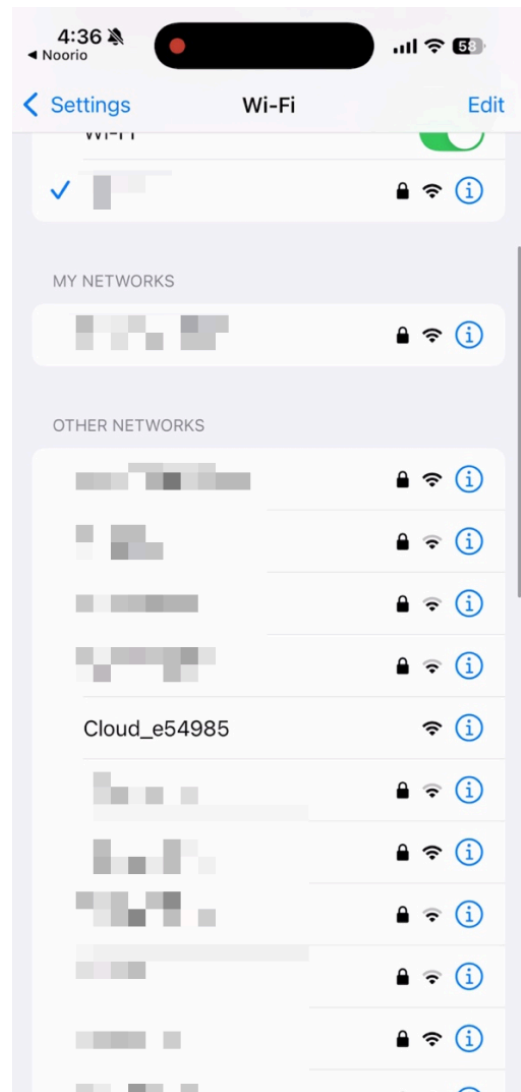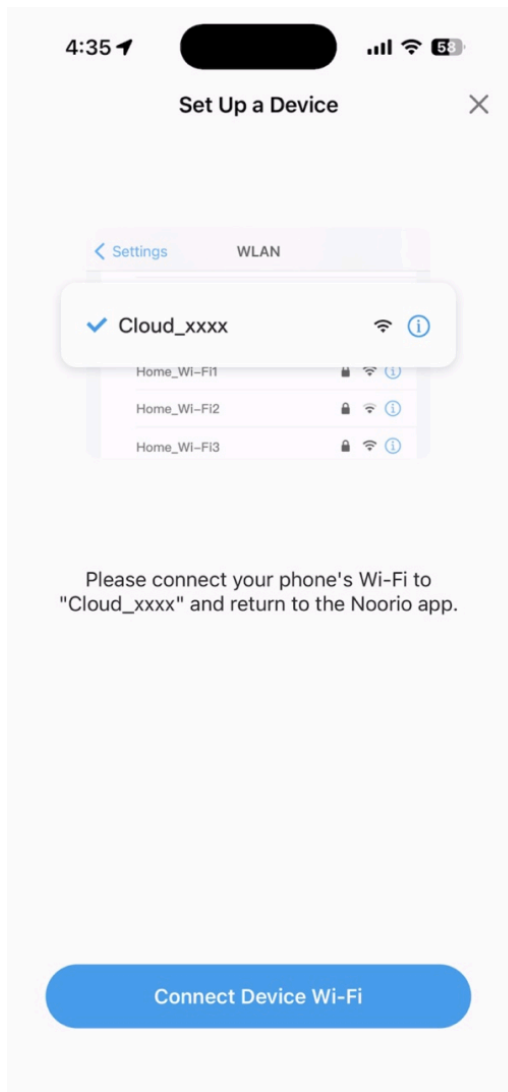

Hotspot Configuration Step4

Return to the app and wait for the camera to pair successfully.

