


Connecting Using AP Mode



If you are having challenges connecting your Feit Electric smart device using Wi-Fi, AP mode is another way to add your device.


Adding Your Device Using AP Mode

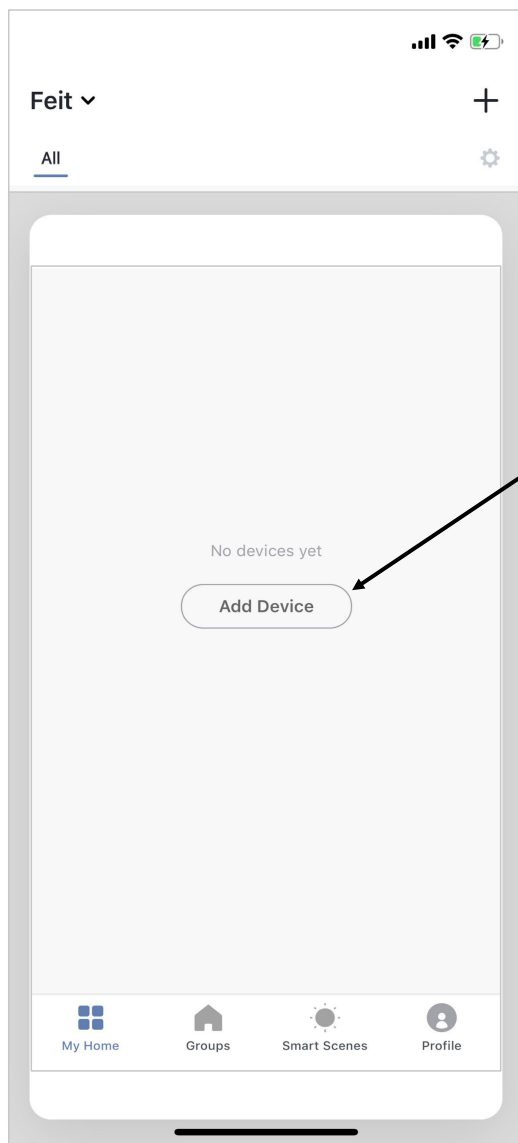

Open up the Feit Electric app



Tap + in the upper right corner

Note: if this is the first device you are setting up you can also select [Add Device](#)

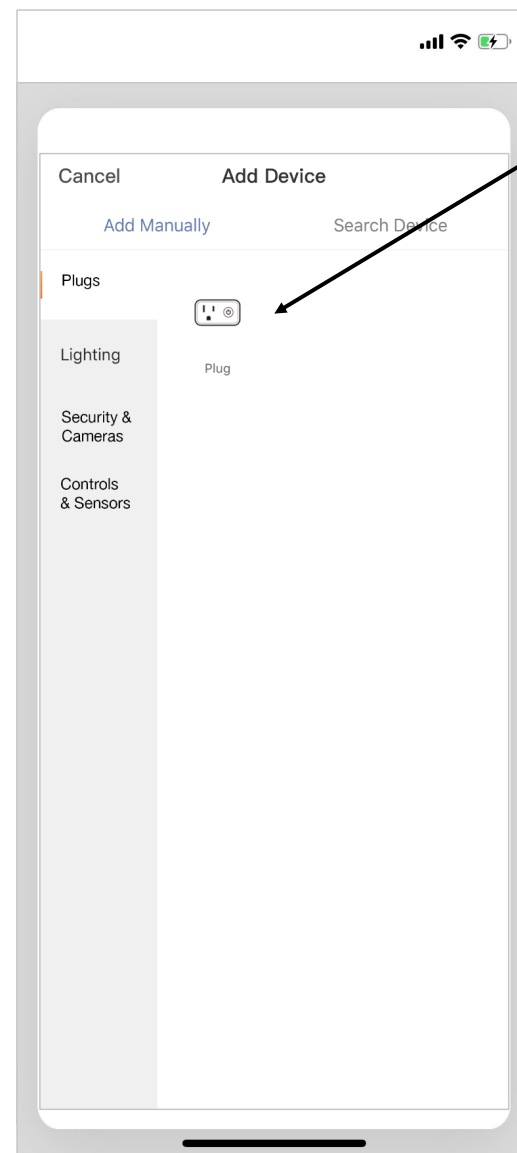

Choose your device type

Adding Your Device Using AP Mode

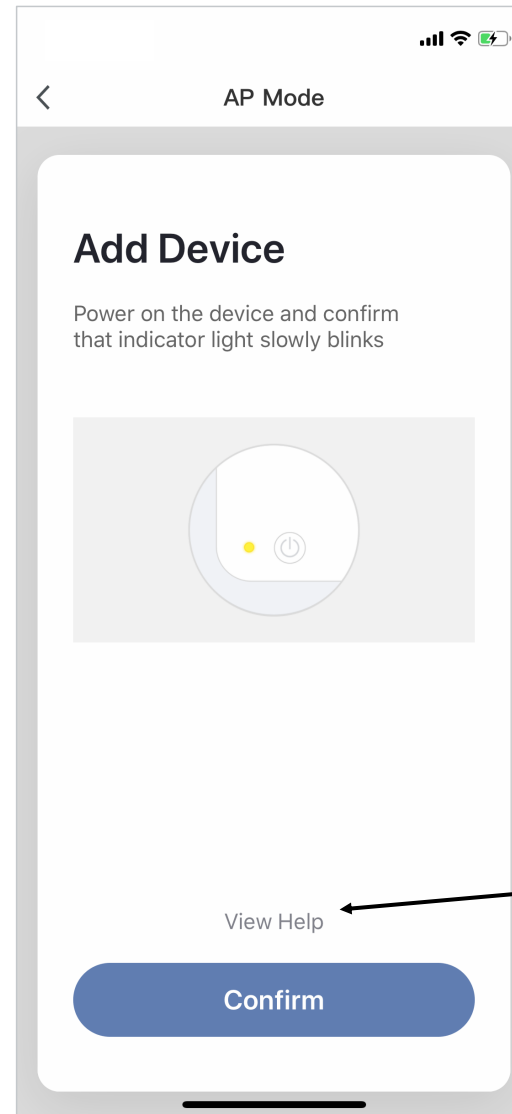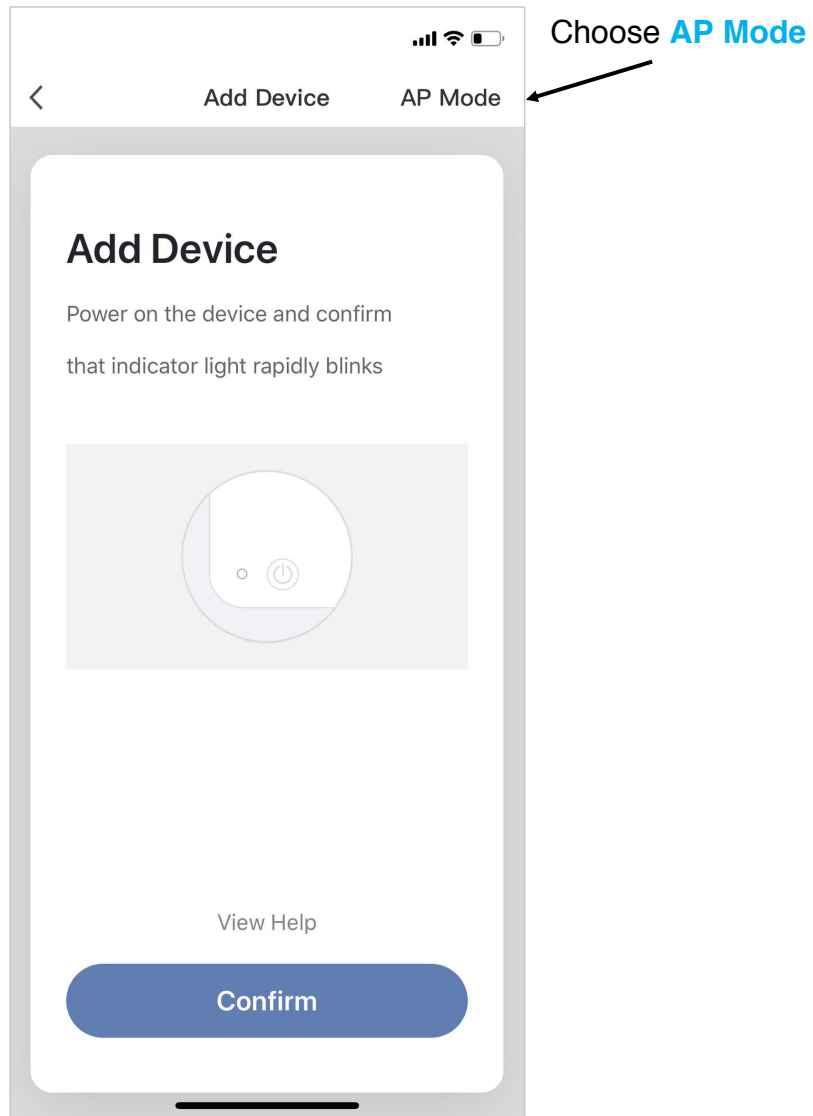

Make sure your device is in AP pairing mode (light should be flashing slowly 1 time every 3 seconds), and then press **Confirm** to go on to the next step.

If your device is not slowly flashing, **View Help** for additional information and instructions.

Adding Your Device Using AP Mode



AP Mode

Enter Wi-Fi Password

This app is supported only on 2.4GHz Wi-Fi channels

TP-LINK_2.... [Change Network](#)

.....

Confirm

Enter the name of your 2.4 GHz Wi-Fi network, enter your password and tap **Confirm** to begin connecting

Note: your Wi-Fi network name and password are case sensitive.

AP Mode

Connect phone to device's wifi hotspot

1.Open WLAN Settings


2.Back to the App and continue to add device

Go connect


Tap **Go connect**

If you do not get automatically redirected please visit your phone wireless settings page to pick the SmartLifexxx network.

Adding Your Device Using AP Mode

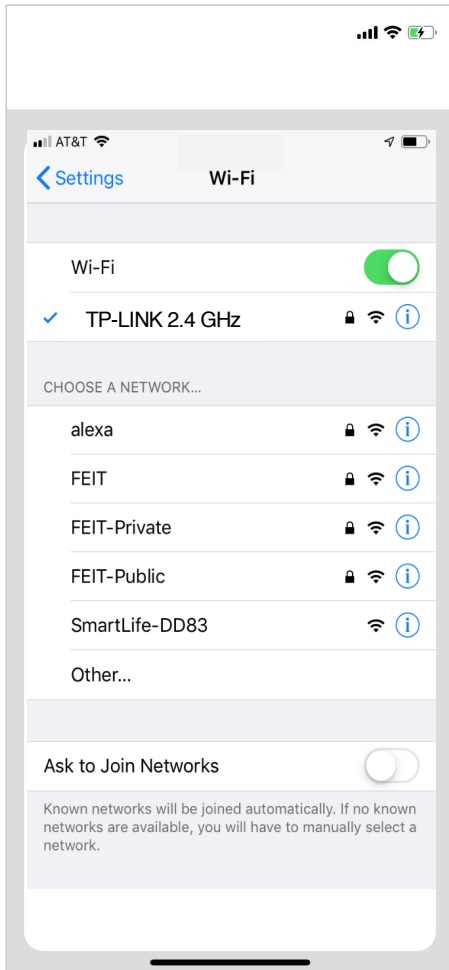

The app will direct you to your phone settings screen. Unselect your 2.4 GHz Wi-Fi network and choose the SmartLife network.

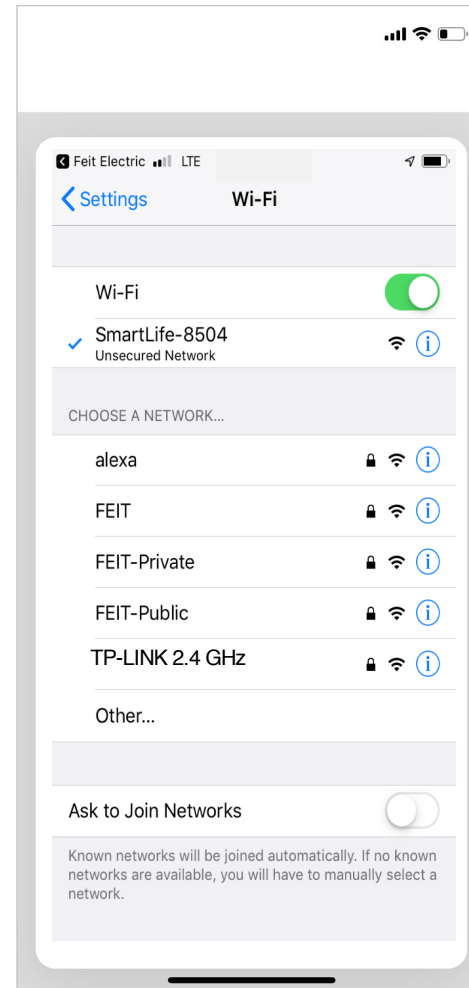

After you have connected to SmartLife return to the Feit Electric app.

Note: After connecting your device your phone will automatically rejoin your original 2.4 GHz network.

Your device should begin connecting using AP Mode.

If you see this screen your device was added successfully.

If see a **Failed to Add** screen it means the network connection failed. Try connecting again or [View Help](#).

