



FCC SDoC TEST REPORT

Shenzhen Tianhong Optoelectronics CO.,LTD

Dehumidifier

Test Model: TH-DH16

Prepared for : Shenzhen Tianhong Optoelectronics CO.,LTD
Address : 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 30, 2021
Number of tested samples : 1
Sample number : 211130008A
Date of Test : November 30, 2021 ~ December 02, 2021
Date of Report : April 13, 2022





FCC SDoC TEST REPORT
FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014

Report Reference No. : LCS220406135AE
Date Of Issue : April 13, 2022

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**
Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Testing Location/ Procedure... : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : **Shenzhen Tianhong Optoelectronics CO.,LTD**
Address : 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen

Test Specification

Standard..... : FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014
Test Report Form No. : LCSEMC-1.0
TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF..... : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Dehumidifier**
Test Model : TH-DH16
Trade Mark..... : N/A
Ratings : Please Refer to Page 7

Result : **Positive**

Compiled by:

Emma Wang/ File administrators

Supervised by:

Baron Wen/Technique principal

Approved by:

Gavin Liang/ Manager





FCC -- TEST REPORT

Test Report No. : LCS220406135AE	<u>April 13, 2022</u> Date of issue
--	--

Test Model	: TH-DH16
EUT.....	: Dehumidifier
Applicant.....	: Shenzhen Tianhong Optoelectronics CO.,LTD
Address.....	: 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen Tianhong Optoelectronics CO.,LTD
Address.....	: 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Tianhong Optoelectronics CO.,LTD
Address.....	: 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen
Telephone.....	: /
Fax.....	: /

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revisions Content	Revised By
000	April 13, 2022	Initial Issue	/

Remark:

Original Test Report “LCS211130008AE” dated December 03, 2021

The original report :

Applicant: Cixi Chenjun Electrical Appliance Co., Ltd.

Address: No. 152, Xintang Road, Nanyuan Village, Fuhai Town, Cixi City, Zhejiang Province

Model: CJ-2020-5

Manufacturer: Cixi Chenjun Electrical Appliance Co., Ltd.

Address: No. 152, Xintang Road, Nanyuan Village, Fuhai Town, Cixi City, Zhejiang Province

Model: CJ-2020-5

Factory: Cixi Chenjun Electrical Appliance Co., Ltd.

Address: No. 152, Xintang Road, Nanyuan Village, Fuhai Town, Cixi City, Zhejiang Province

Model: CJ-2020-5

Now change to:

Applicant: Shenzhen Tianhong Optoelectronics CO.,LTD

Address: 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen

Manufacturer: Shenzhen Tianhong Optoelectronics CO.,LTD

Address: 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen

Factory: Shenzhen Tianhong Optoelectronics CO.,LTD

Address: 3th Floor, Building G, Oceania Smart Industrial Park, No. 129 Songgang Section, Guangshen Road, Baoan District, Shenzhen

Model: TH-DH16

This co-license test report is based on the test raw-data of original test report, after construction/information review and verification, no additional tests were considered necessary.





TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT).....	7
2.2. Support equipment List.....	7
2.3. Description of Test Facility	7
2.4. Statement of the Measurement Uncertainty.....	7
2.5. Measurement Uncertainty.....	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
3.2. Radiated emission Measurement.....	13
4. PHOTOGRAPH	18
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	19





1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014	Class B	PASS

N/A is an abbreviation for Not Applicable.

Test mode:		
Mode	Working	Record





2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Dehumidifier

Trade Mark : N/A

Test Model : TH-DH16

Power Supply : Input: 100-240V~, 50/60Hz, 80W

Highest internal frequency : $F_x \leq 108\text{MHz}$

2.2. Support equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--

2.3. Description of Test Facility

Site Description

EMC Lab. : NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U _{lab})	Expanded Uncertainty (U _{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	EMI Test Receiver	R&S	ESR3	102312	2021-03-16	2022-03-15
3	Artificial Mains	R&S	ENV216	101119	2021-06-21	2022-06-20
4	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2021-08-19	2022-08-18

3.1.2. Block Diagram of Test Setup

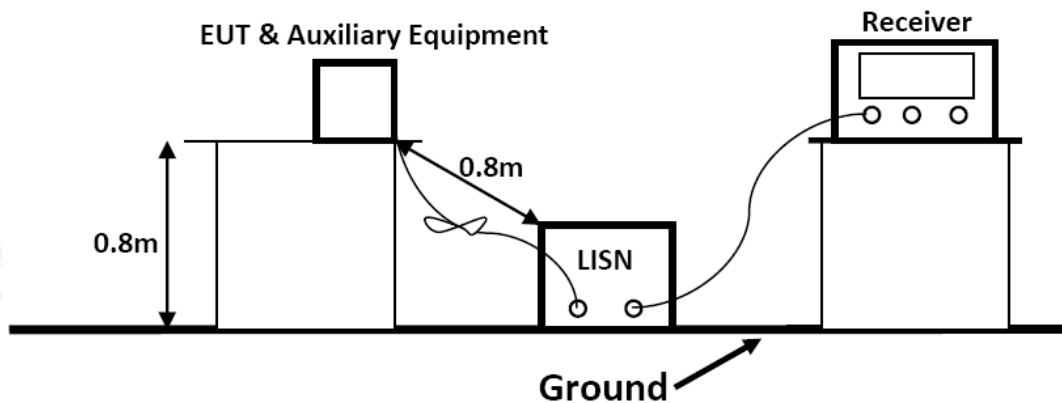

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB μ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.





3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Working and measure it.

3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

3.1.7. Test Results


PASS.

The test result please refer to the next page.





Test Model	TH-DH16	Test Mode	Working
Environmental Conditions	22.5°C, 53.7% RH	Test Engineer	Zero Qi
Pol	Line	Test Voltage	AC 120V/60Hz

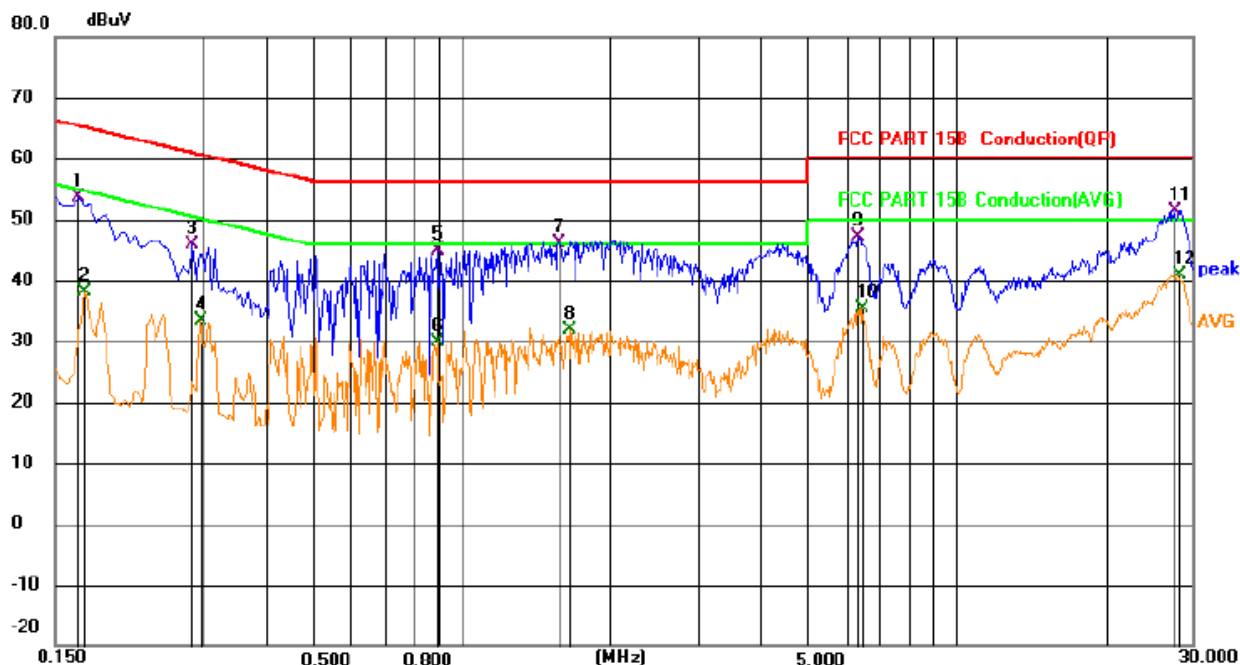


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	33.99	19.76	53.75	65.06	-11.31	QP	
2		0.1726	18.44	19.76	38.20	54.83	-16.63	AVG	
3		0.2850	26.21	19.76	45.97	60.67	-14.70	QP	
4		0.2941	13.63	19.76	33.39	50.41	-17.02	AVG	
5		0.8925	25.19	19.79	44.98	56.00	-11.02	QP	
6		0.8925	10.15	19.79	29.94	46.00	-16.06	AVG	
7		1.5765	26.30	19.82	46.12	56.00	-9.88	QP	
8		1.6485	11.96	19.83	31.79	46.00	-14.21	AVG	
9		6.3421	27.04	19.97	47.01	60.00	-12.99	QP	
10		6.4231	15.32	19.97	35.29	50.00	-14.71	AVG	
11		27.6406	30.70	20.65	51.35	60.00	-8.65	QP	
12		28.1086	20.13	20.65	40.78	50.00	-9.22	AVG	





Test Model	TH-DH16	Test Mode	Working
Environmental Conditions	22.5°C, 53.7% RH	Test Engineer	Zero Qi
Pol	Neutral	Test Voltage	AC 120V/60Hz

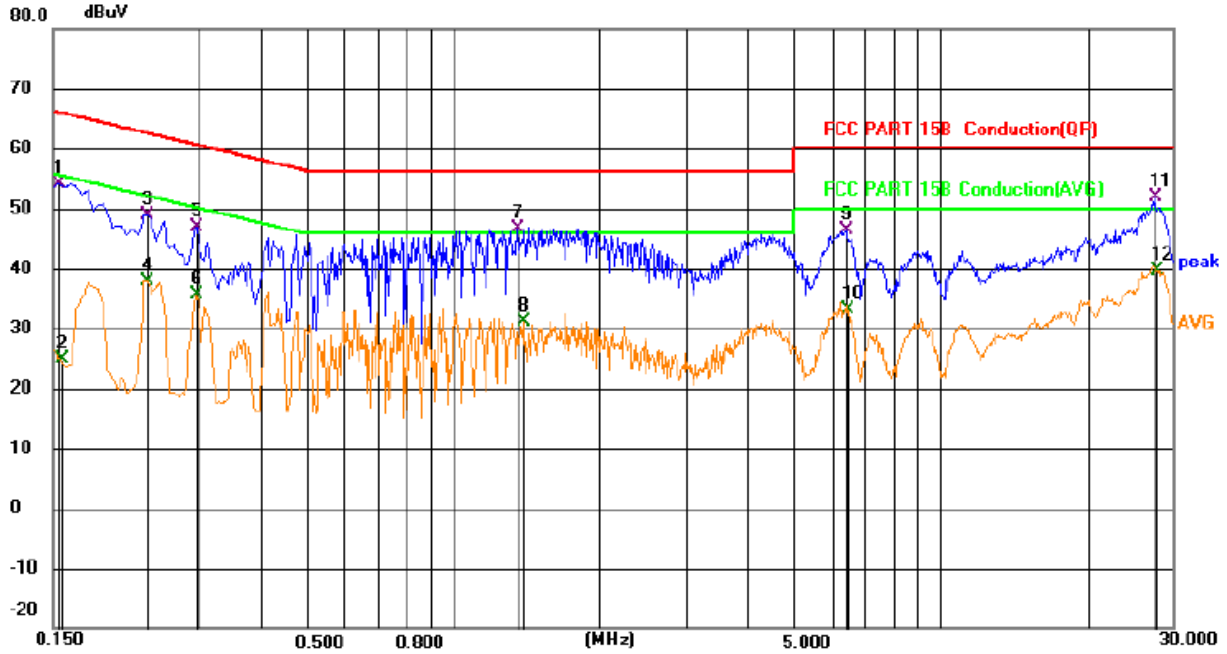

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	34.41	19.76	54.17	65.75	-11.58	QP	
2		0.1556	5.00	19.76	24.76	55.70	-30.94	AVG	
3		0.2356	29.22	19.75	48.97	62.25	-13.28	QP	
4		0.2356	18.08	19.75	37.83	52.25	-14.42	AVG	
5		0.2941	27.17	19.75	46.92	60.41	-13.49	QP	
6		0.2941	15.80	19.75	35.55	50.41	-14.86	AVG	
7		1.3470	26.91	19.79	46.70	56.00	-9.30	QP	
8		1.3920	11.39	19.80	31.19	46.00	-14.81	AVG	
9		6.4006	26.34	19.96	46.30	60.00	-13.70	QP	
10		6.4816	13.24	19.96	33.20	50.00	-16.80	AVG	
11		27.6001	31.26	20.63	51.89	60.00	-8.11	QP	
12		27.9736	18.99	20.64	39.63	50.00	-10.37	AVG	

Note: Pre-Scan all mode, Thus record worse case mode result in this report.







3.2. Radiated emission Measurement

3.2.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	E3	E3-EMC	/	N/A	N/A
2	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
3	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
4	EMI Test Receiver	R&S	ESR3	102311	2021-08-19	2022-08-18
5	Broadband Preamplifier	/	BP-01M18G	P190501	2021-06-21	2022-06-20

3.2.2. Block Diagram of Test Setup

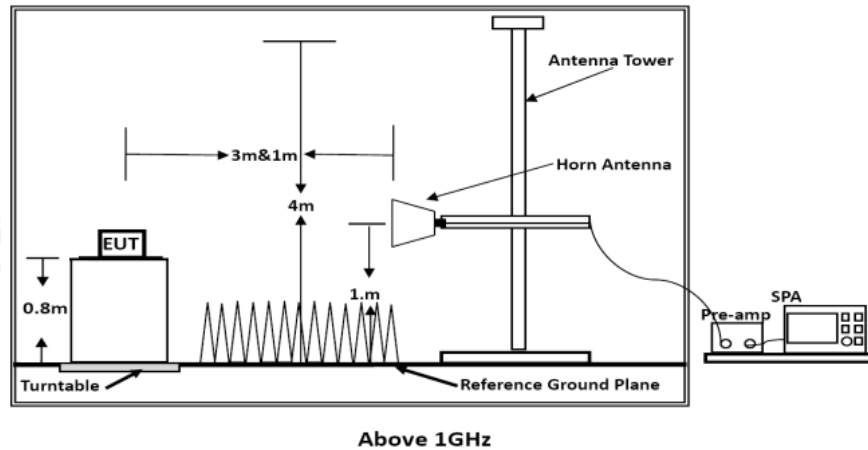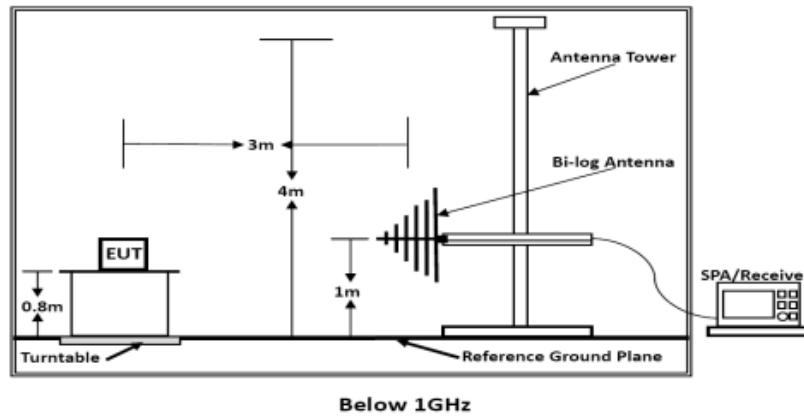



3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54
Remark : (1) Emission level $(\text{dB})\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$ (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V}/\text{m}$)	Average Limit ($\text{dB}\mu\text{V}/\text{m}$)
Above 1000	3	74	54
***Note: The lower limit applies at the transition frequency.			

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Working and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.





3.2.7. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

The frequency range from 30MHz to 1000MHz and above 1000MHz is checked.

3.2.8. Radiated Emission Noise Measurement Result


PASS.

The scanning waveforms please refer to the next page.





Test Model	TH-DH16	Test Mode	Working
Environmental Conditions	22.2°C, 53.5% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Hubert	Test Voltage	AC 120V/60Hz

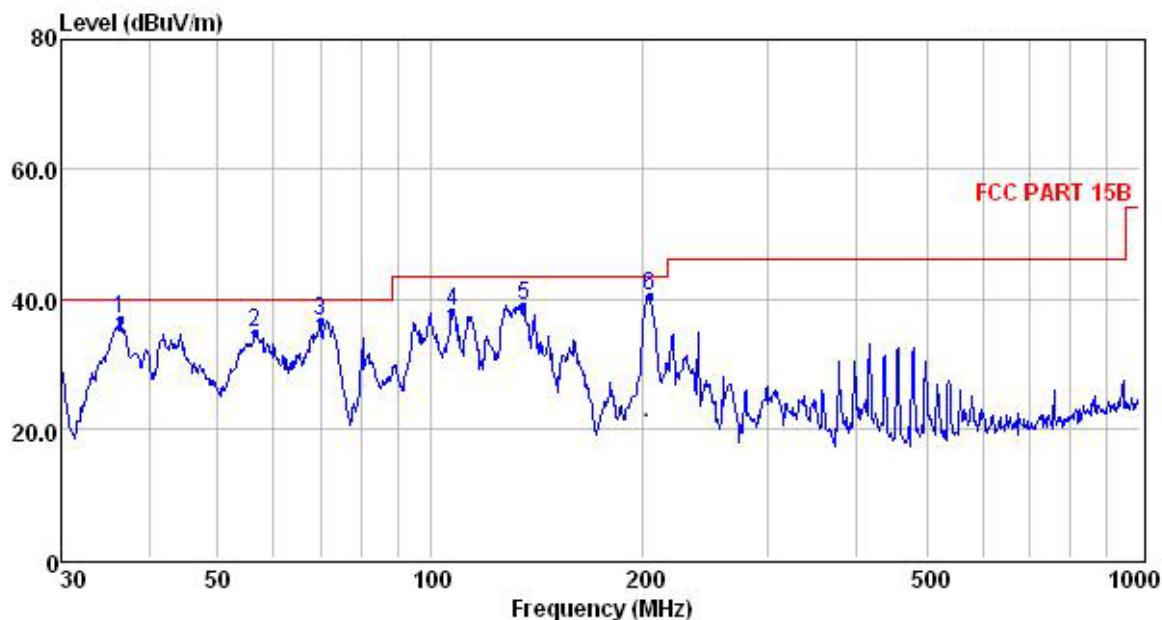


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	36.38	23.84	0.41	12.65	36.90	40.00	-3.10	QP
2	56.39	21.48	0.47	12.93	34.88	40.00	-5.12	QP
3	69.84	27.36	0.51	8.71	36.58	40.00	-3.42	QP
4	107.51	24.88	0.68	12.48	38.04	43.50	-5.46	QP
5	135.51	29.75	0.70	8.52	38.97	43.50	-4.53	QP
6	204.24	28.64	0.99	10.70	40.33	43.50	-3.17	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported





Test Model	TH-DH16	Test Mode	Working
Environmental Conditions	22.2°C, 53.5% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Hubert	Test Voltage	AC 120V/60Hz

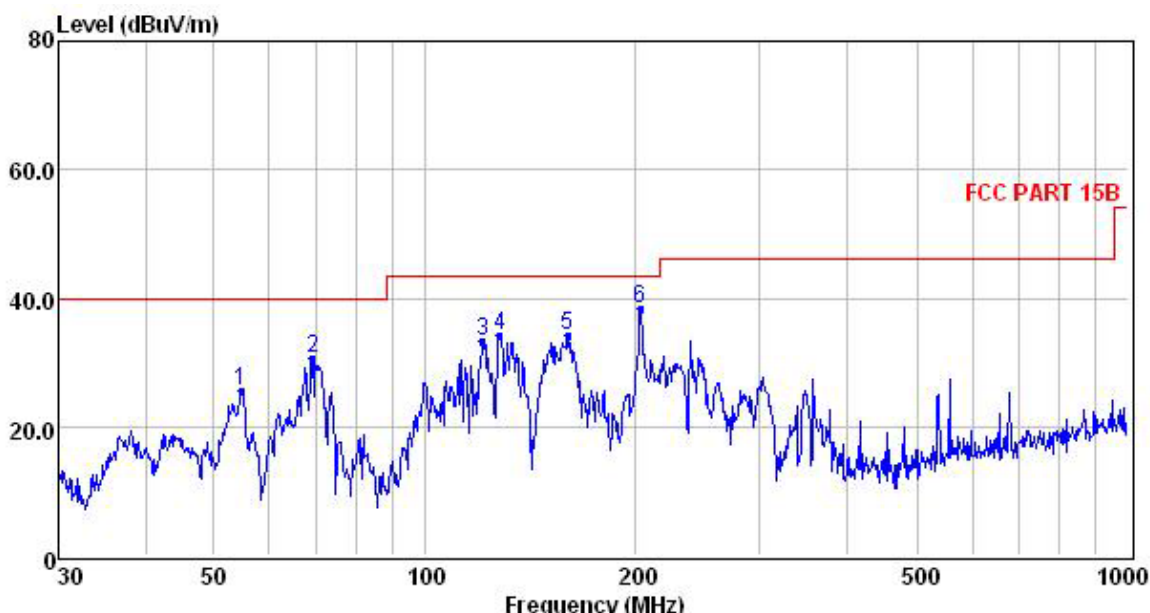

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	54.64	12.17	0.46	13.04	25.67	40.00	-14.33	QP
2	69.11	21.04	0.51	9.02	30.57	40.00	-9.43	QP
3	121.12	22.36	0.70	10.31	33.37	43.50	-10.13	QP
4	128.11	24.18	0.67	9.22	34.07	43.50	-9.43	QP
5	159.78	24.94	0.75	8.66	34.35	43.50	-9.15	QP
6	202.81	27.02	0.82	10.66	38.50	43.50	-5.00	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

Remark: For above 1000MHz, Because the emission it too low to be reported.





4. PHOTOGRAPH



Photo of Power Line Conducted Measurement



Photo of Radiated emission Measurement



5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1



Fig. 2





Fig. 3



Fig. 4





Fig. 5



Fig. 6





Fig. 7



Fig. 8



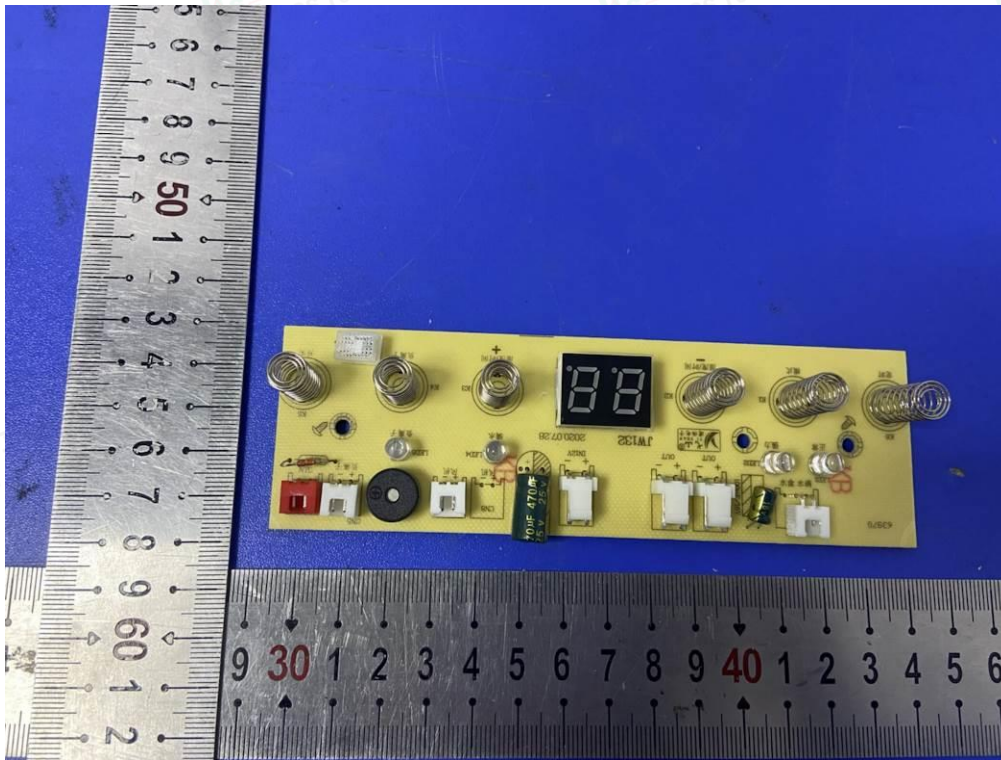


Fig. 9

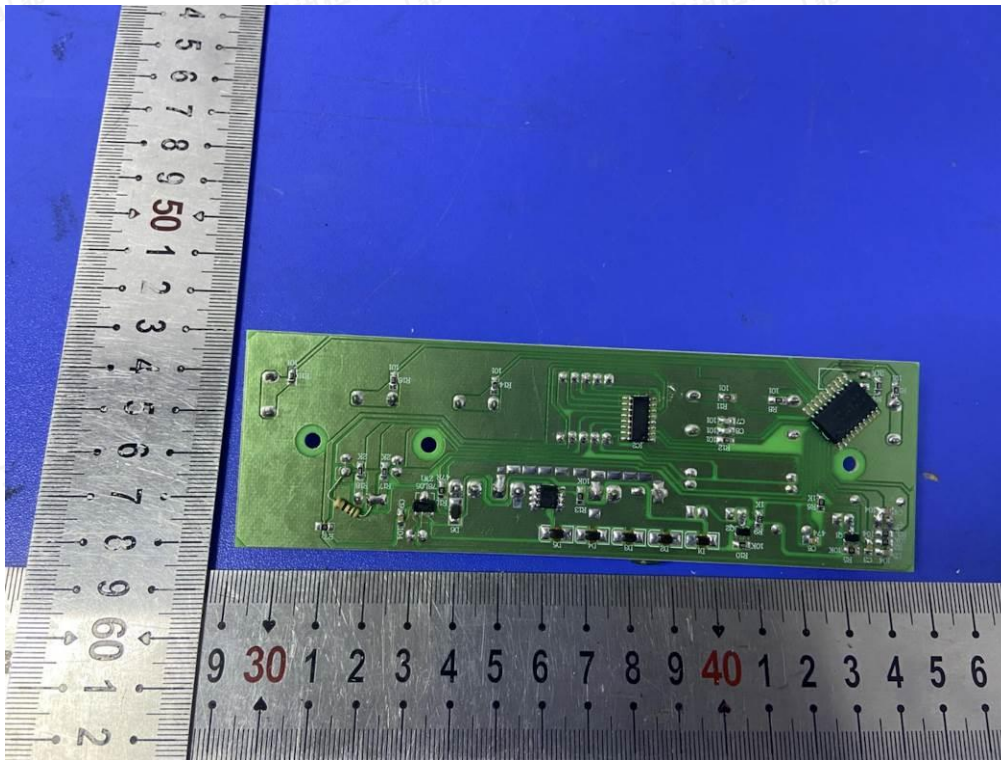


Fig. 10



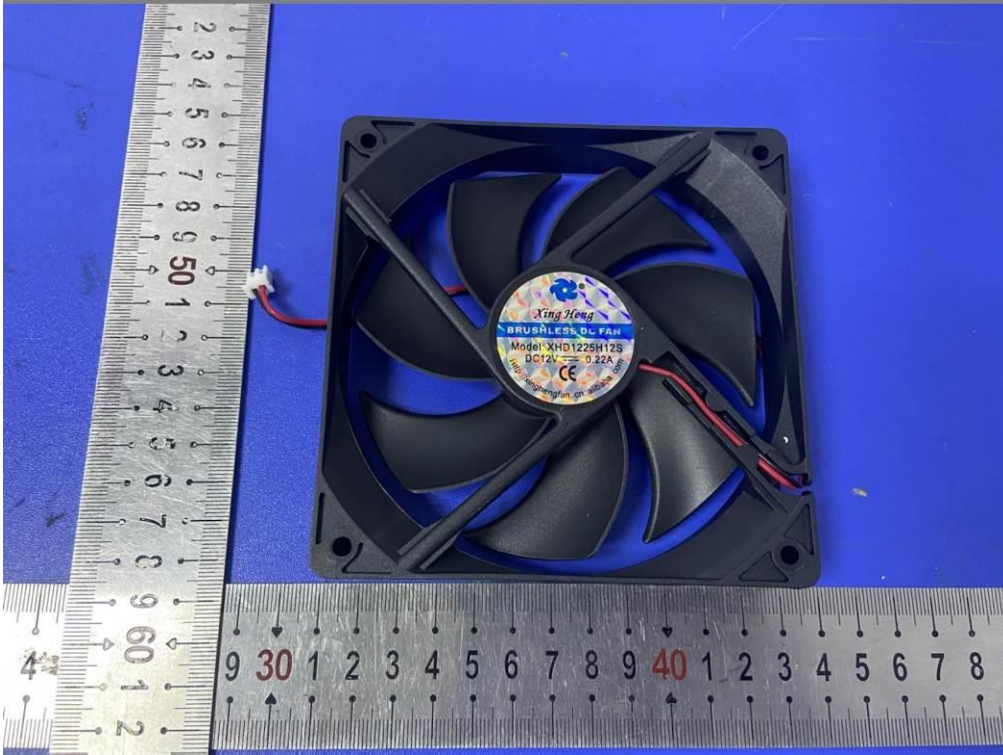


Fig. 11

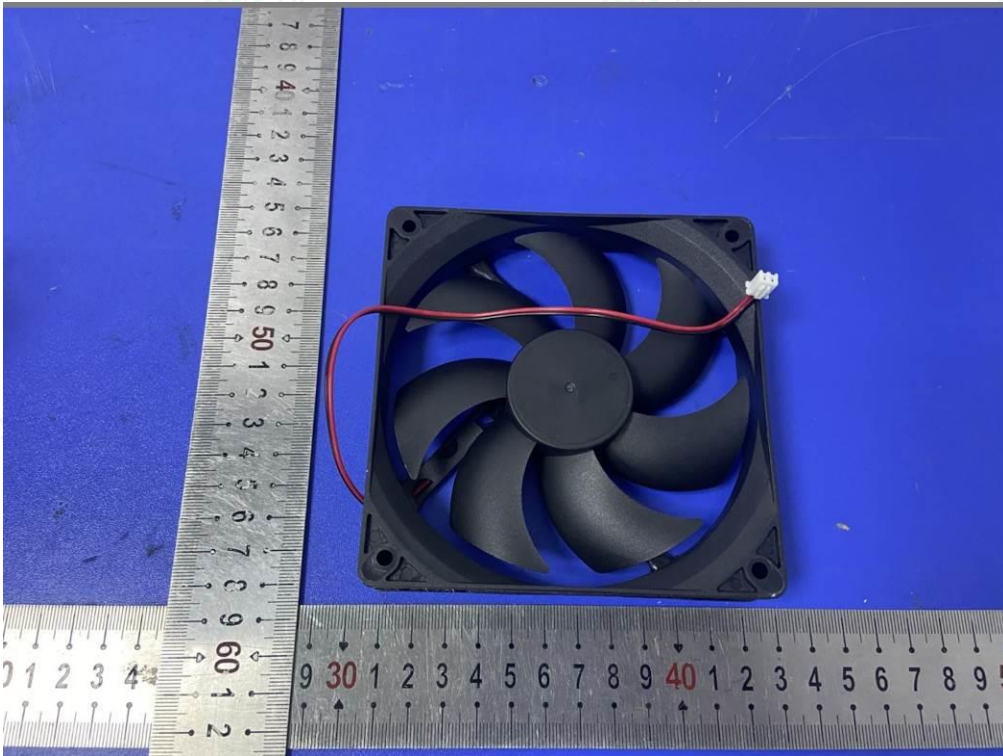


Fig. 12

-----THE END OF TEST REPORT-----

