

1. [Solution home](#)
2. [Setup & Use](#)
3. [General Settings](#)

If you have no idea how to install your Huion drivers on Windows properly, this article gives you step-by-step instructions to help guide you through the installation process.

TABLE OF CONTENTS

- [Part 1. Precautions before driver installation](#)
- [Part 2. Guidelines for installation of Huion driver V14, V13 and V12](#)
 - [Steps for installing the V15 driver](#)
 - [Steps for installing the V14 driver](#)
 - [Steps for installing the V13 driver](#)
 - [Steps for installing the V12 driver](#)


Part 1. Precautions before driver installation

- 1) If a graphic tablet driver has been installed on your Windows computer, please uninstall it before installing the new one. Otherwise, conflicts will occur. (Please check the [Three Methods to Uninstall Huion Drivers in Windows 7](#) (<http://support.huion.com/solution/articles/44001163846-three-methods-to-uninstall-huion-drivers-from-windows-7/en>) and [How to Install/Uninstall Huion V14 Driver on Windows \(Video\)](#), (<https://support.huion.com/en/support/solutions/articles/44001905757-how-to-install-uninstall-huion-v14-driver-on-windows-video->) articles to uninstall the Huion driver properly)
- 2) After uninstalling the driver, please restart your computer.
- 3) Please **turn off the anti-virus and close all drawing programs** on your computer before installing the new driver. Otherwise, you will be unsuccessful in installing the new driver.
- 4) **Do not connect your graphic input device to the computer before the driver is installed.** Otherwise, you may encounter a delay or error in system identification when installing the driver.
- 5) It is strongly recommended not to change the default path when installing the driver and just click **Install** to continue.
- 6) **Extract the driver installation program or unzip the file before running it.** Next, **Right-click** the program, then click **"Run as administrator"** to install it with administrator rights.


Part 2. Guidelines to install Huion driver V15, V14, V13, and V12

Steps for installing the V15 driver


1. Download the **latest version** of your tablet driver from this link: <https://huion.com/download/> (<https://huion.com/download/>), and **extract or unzip** the file. If you have issues with the latest version, download the 2nd latest one, and so on.
2. Double-click on the unzipped tablet driver and click "OK" to proceed. You can also right-click on it and click "Run as administrator."

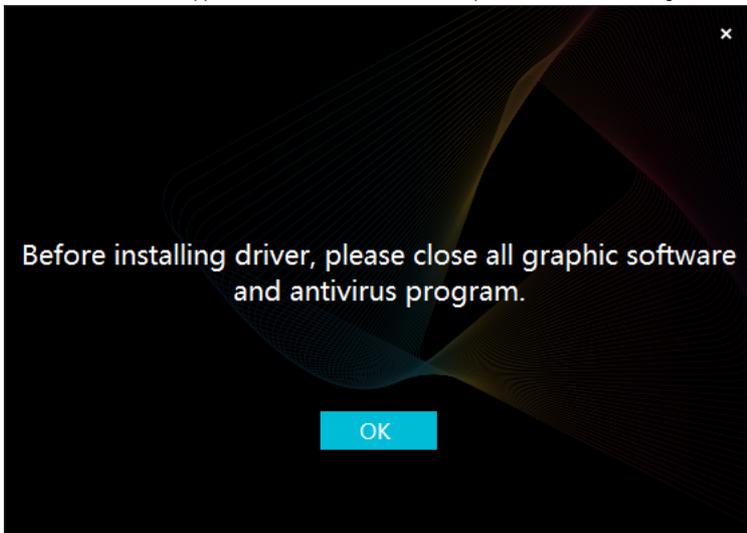


3. Click the checkbox to agree with the User Agreement and click "Install now"

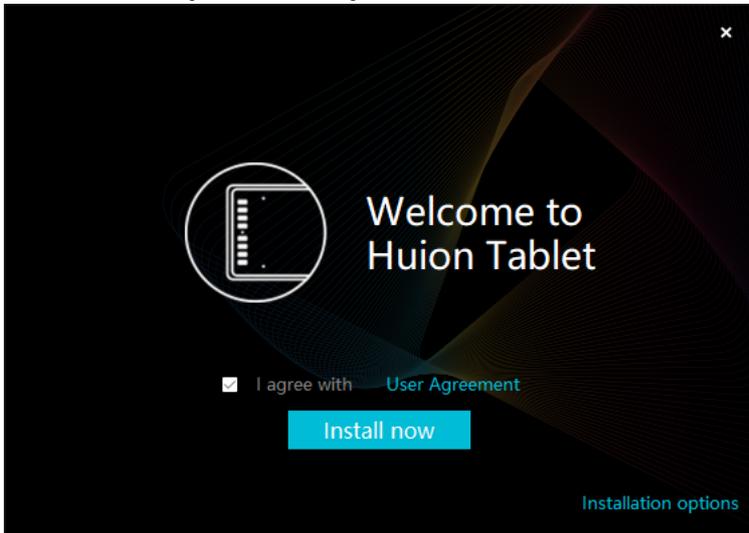


4. After the installation has been completed, click on "Try it now"

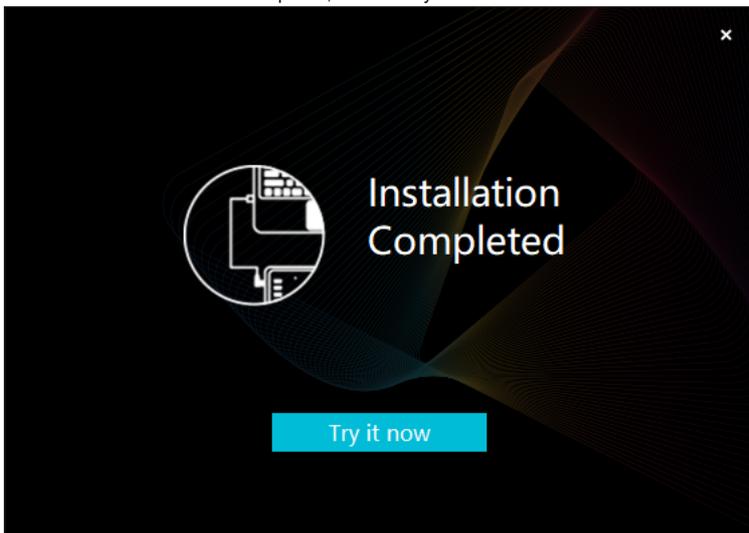


5. Click "YES, SHARE DATA" or click "NO THANKS". We recommend that you share your data to help us improve our products.

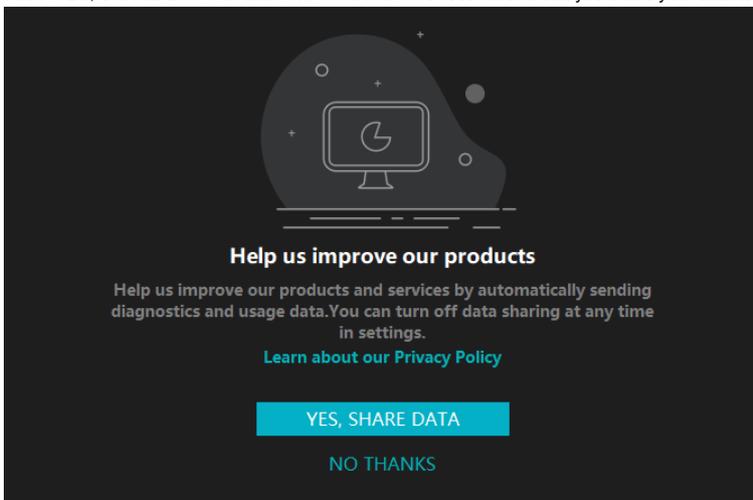

6. The driver will launch and will appear on your hidden icons in the lower right area of your screen or on the right side of your Taskbar. Click the Huion Tablet driver icon, and this will bring you to the driver panel that shows the device is disconnected.

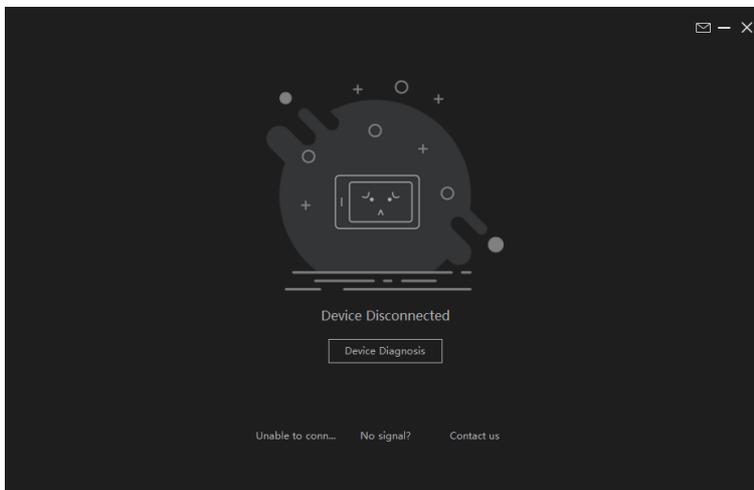


7. Connect your tablet to your computer and wait for the driver to detect your tablet. Then, proceed to customize your tablet's press keys (if applicable), pen buttons, and work area. You can refer to these articles on how to do so: [How to Customize Press Keys and Digital Pen Button Functions for Specific Software](https://support.huion.com/en/support/solutions/articles/44001909702) (<https://support.huion.com/en/support/solutions/articles/44001909702>), and [How to Set Your Tablet Display Work Area](https://support.huion.com/en/support/solutions/articles/44001925105) (<https://support.huion.com/en/support/solutions/articles/44001925105>).

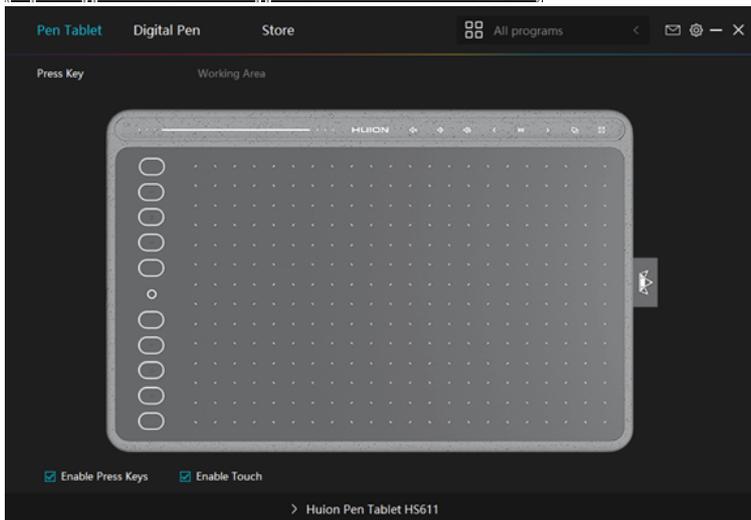

8. You can then **open your drawing or writing program** that you have downloaded and installed from the internet.

Steps for installing the V14 driver

1. Visit Huion's official website (www.huion.com/download (<http://www.huion.com/download>)) and download the necessary driver.

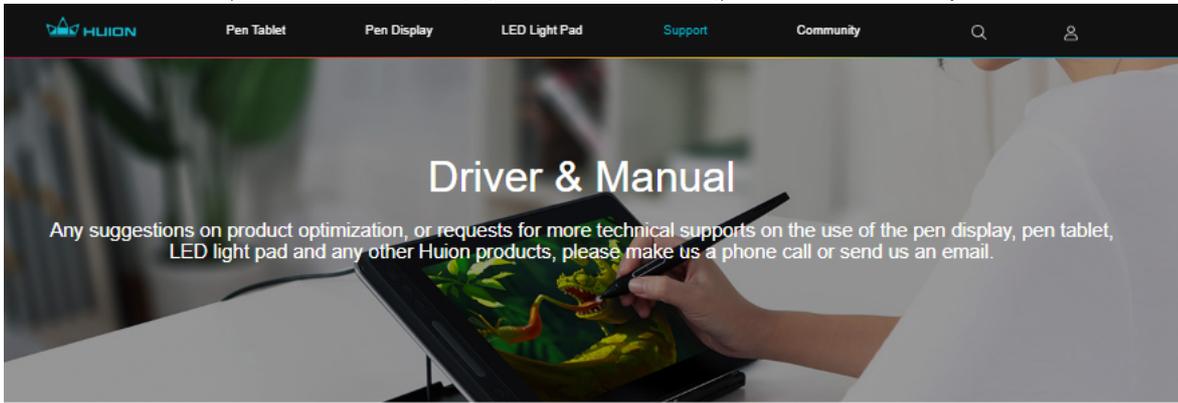

Please enter the product model to download the corresponding driver.

Option 1: Type your tablet model


Search by Product Model

Popular Model: [NEW 1080PLUS\(8192\)](#) [GT-191\(8192\)](#)

You may also specify the model and OS to find the driver you need.

Product Model

OS Product Model




Please find your product model and download the driver and instructions.

Option 2: Select your tablet model from the dropdown list, then choose your computer's operating system


To ensure that you

access the corresponding driver, please type the complete name of your model. For example, if the full name of your graphic tablet is WH1409 V2, you should type WH1409 V2, instead of WH1409.


2. **Unzip or extract** the file downloaded from our official website. Then, double-click the unzipped or extracted exe file to launch the program.

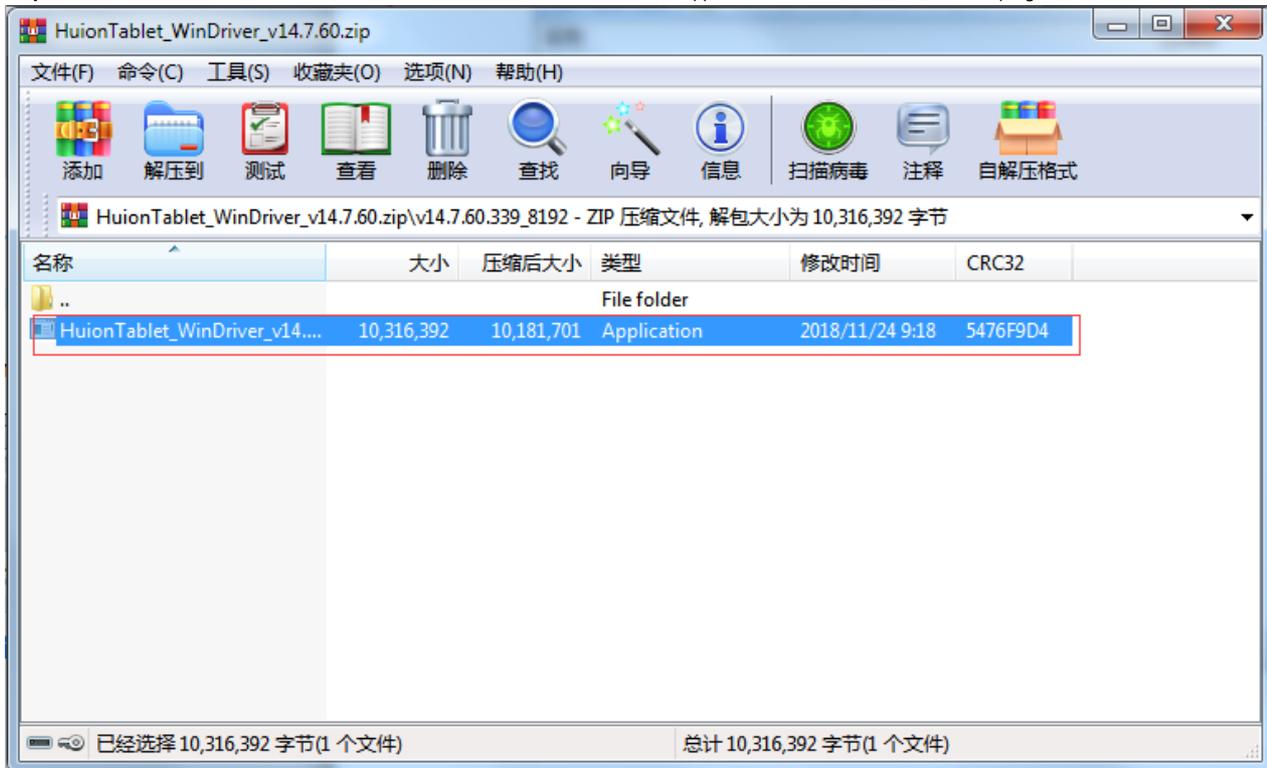


3. Make sure you have closed all painting programs and turned off your antivirus before installing the driver, then click **Yes** for the next step.

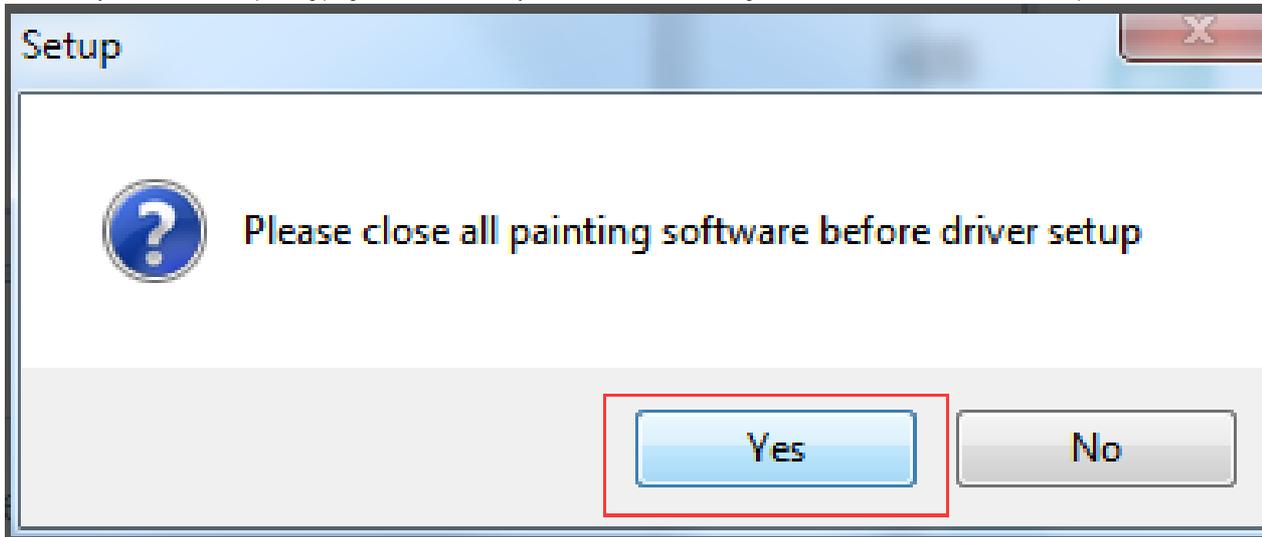

4. Click **Install** to continue.

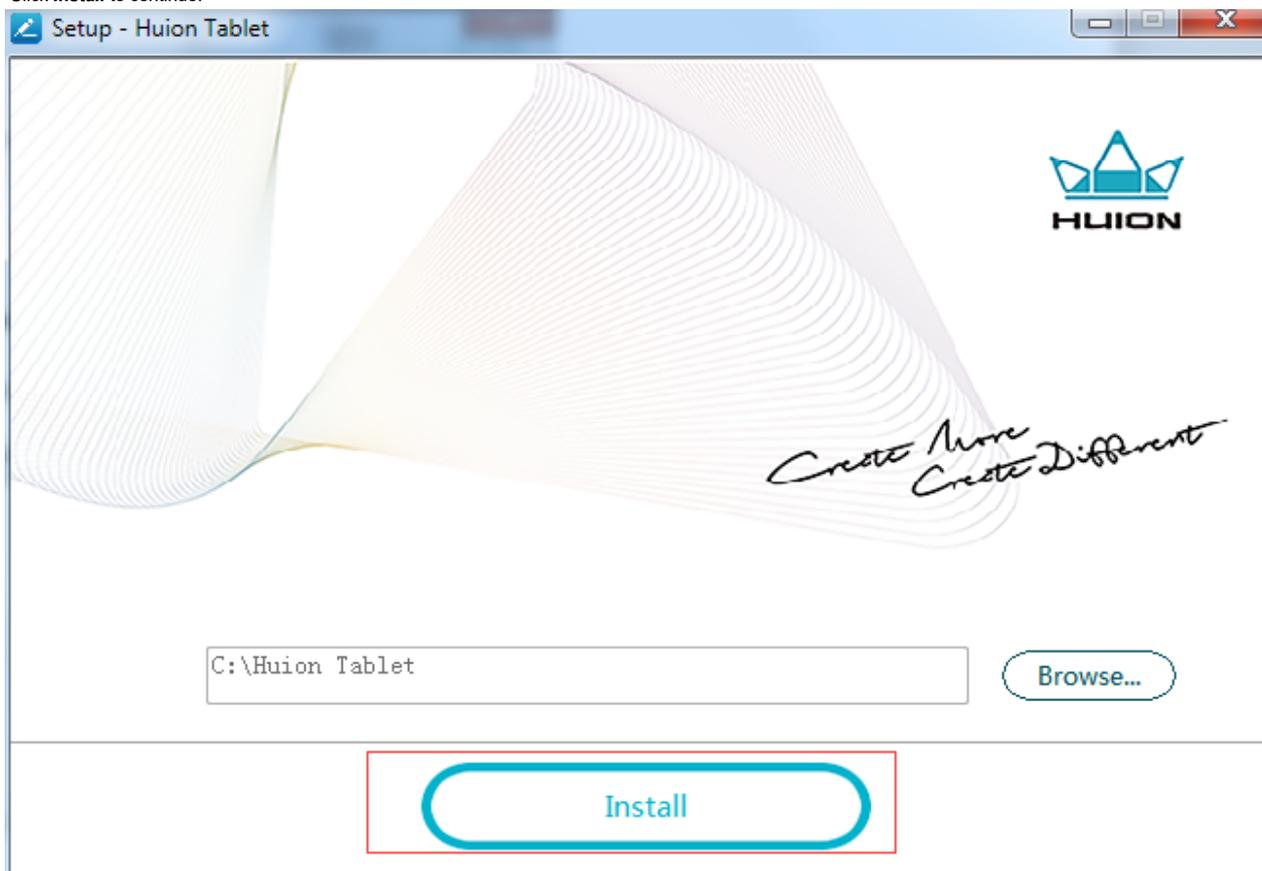


5. Click the "**Completing the Setup Wizard**" button.

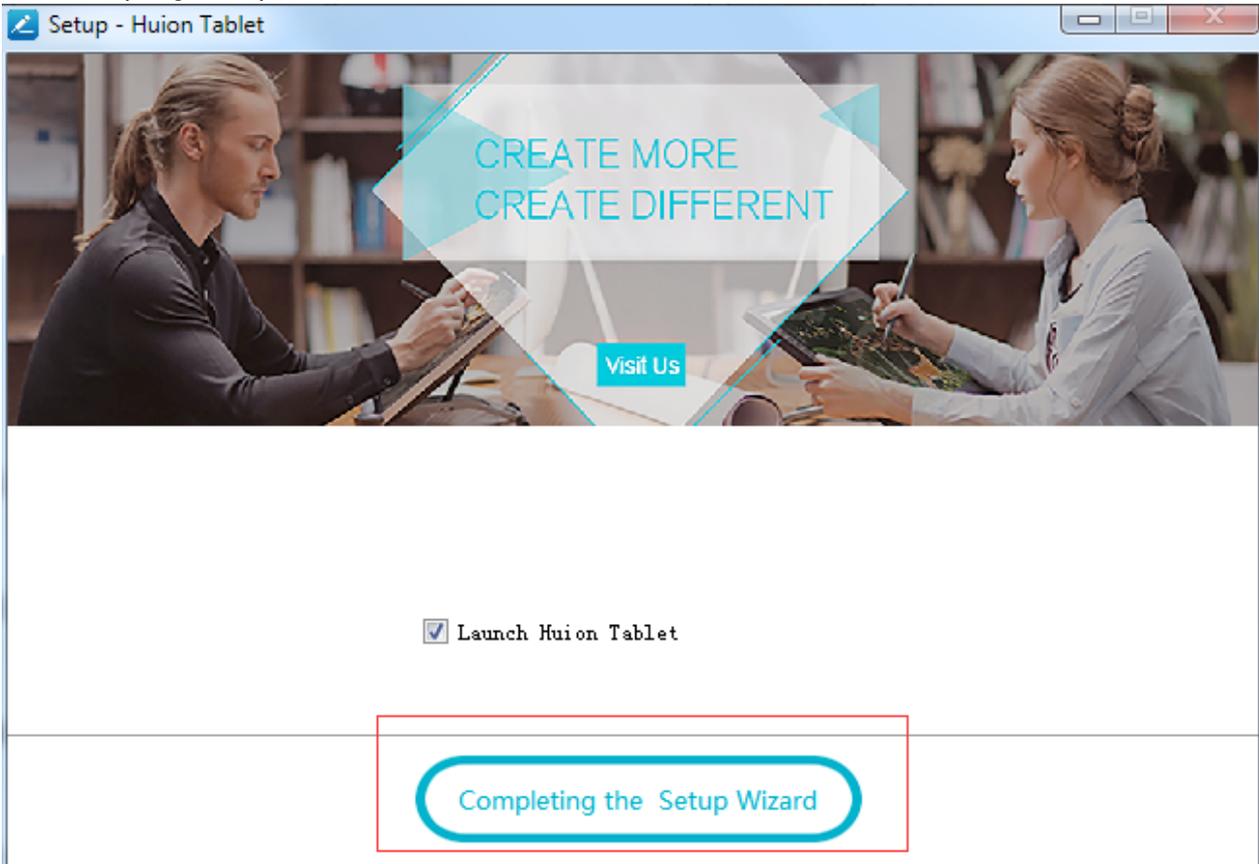

6. Connect your graphic input device to the computer and the gray icon at the bottom-right corner of the desktop will turn to blue as you connect your device. "**Device connected**" will also be indicated on the driver interface, which means the driver has been successfully installed and has detected your tablet.




Gray icon Blue Icon

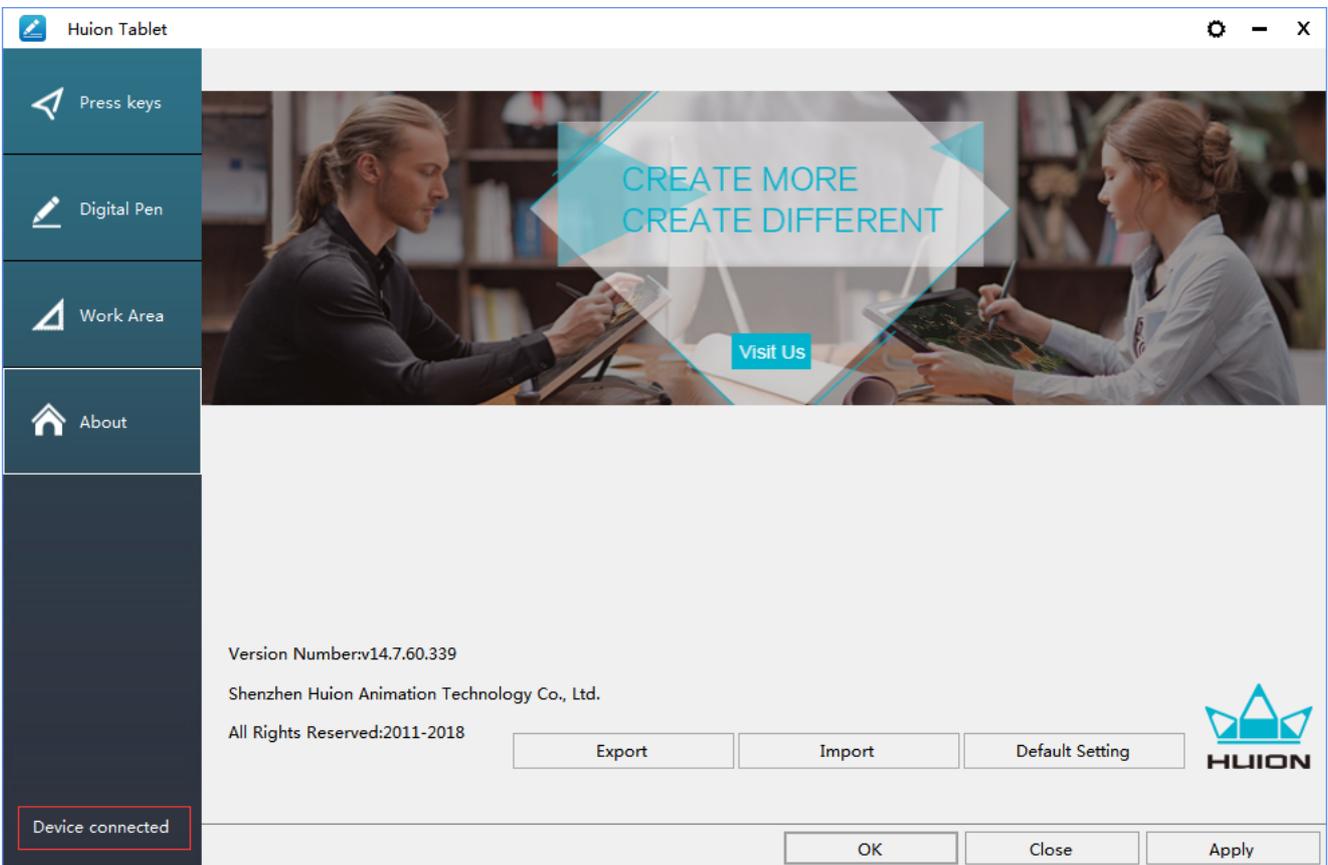

7. You can then **open your drawing or writing program** that you have downloaded and installed from the internet.

Steps for installing the V13 driver

1. Visit Huion's official website (www.huion.com/download (<http://www.huion.com/download>)) and download the driver you need.

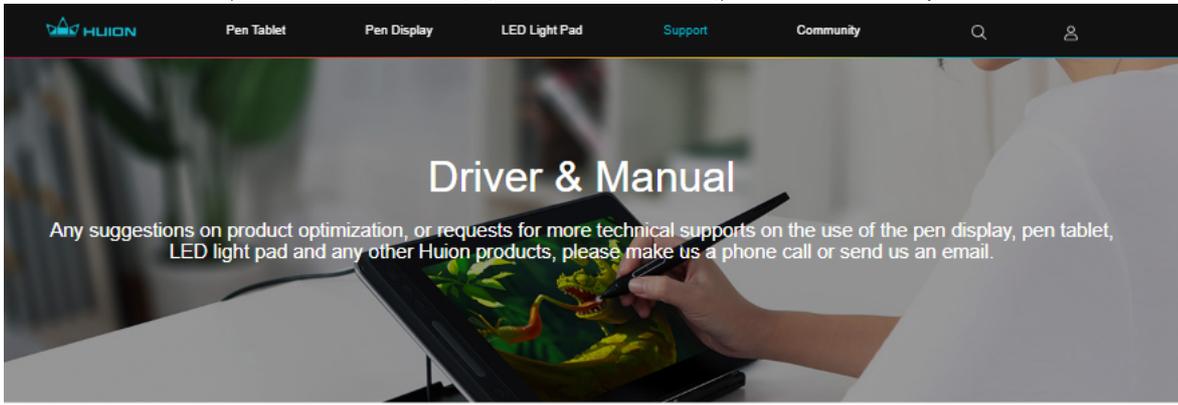

Please enter the product model to download the corresponding driver.

Option 1: Type your tablet model


Search by Product Model

Popular Model: [NEW 1080PLUS\(8192\)](#) [GT-191\(8192\)](#)

You may also specify the model and OS to find the driver you need.

Product Model


OS Product Model




Please find your product model and download the driver and instructions.


Option 2: Select your tablet model from the dropdown list, then choose your computer's operating system

2. **Unzip or extract** the file downloaded from our official website. Then, double-click the unzipped or extracted exe file to launch the program.

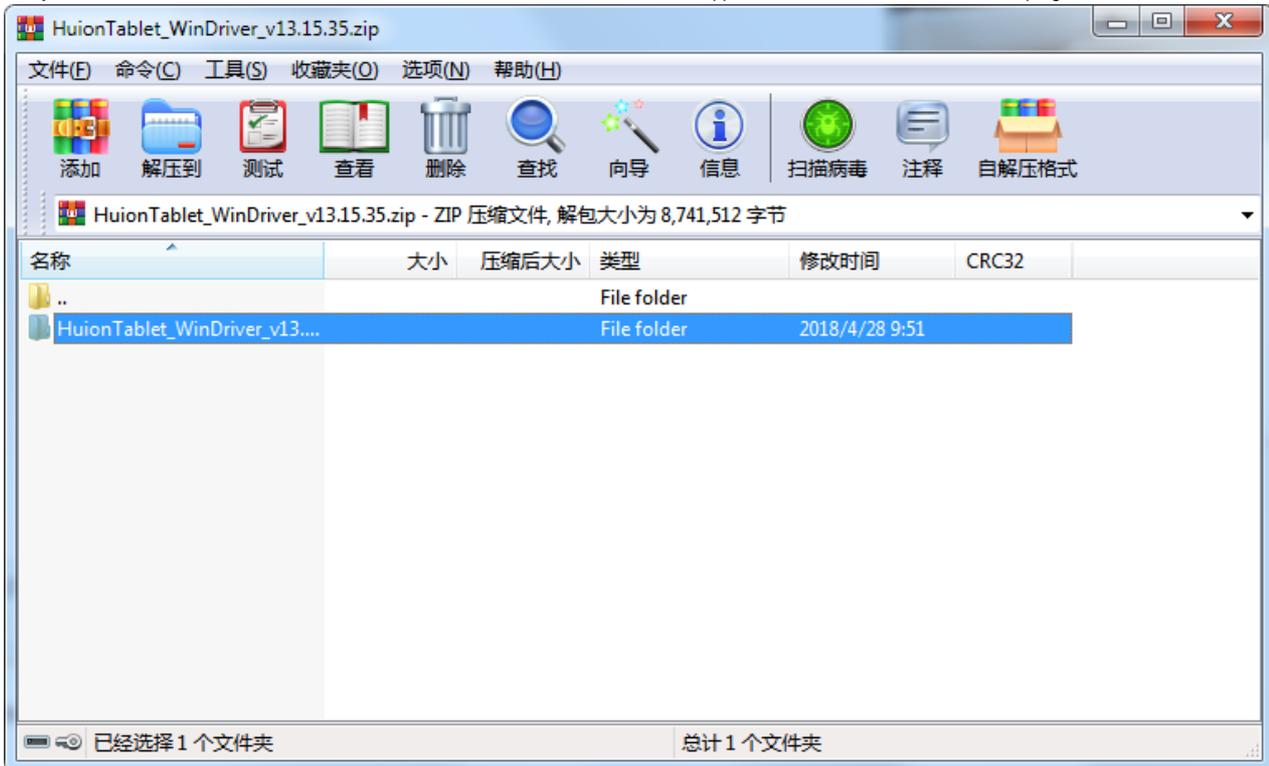


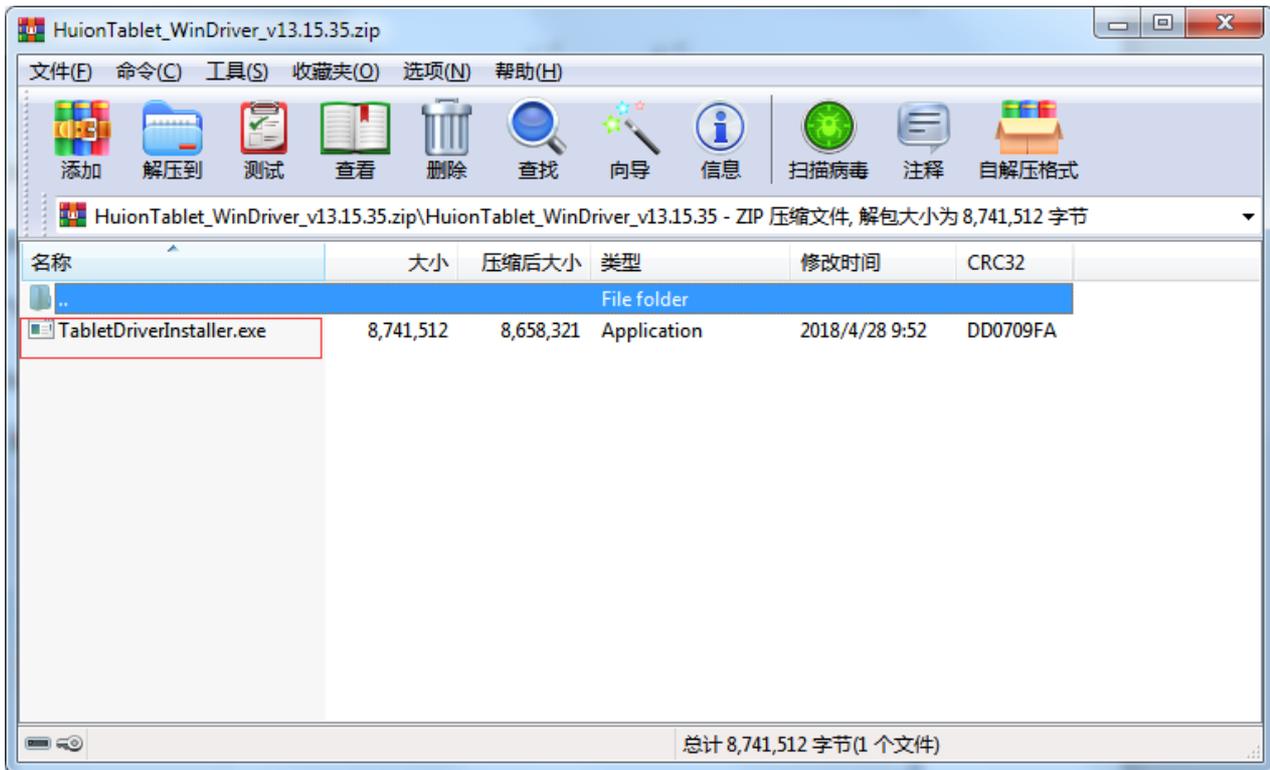


3. Make sure you have closed all painting software and turned off your antivirus before installing the driver and click **Yes** for the next step.

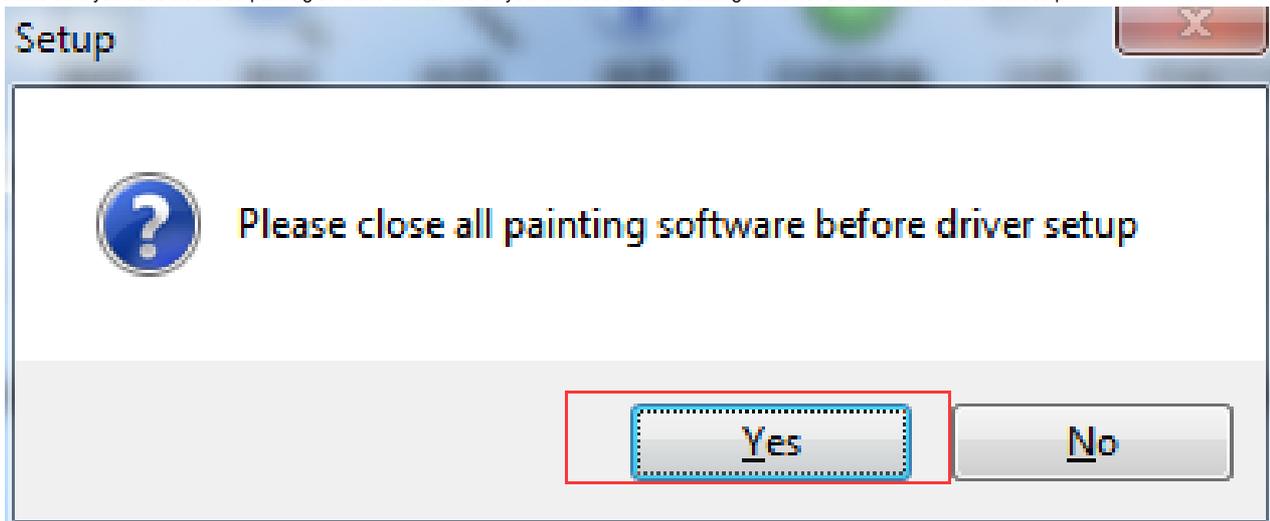



4. Click the **Next** button when the following three prompts pop up.

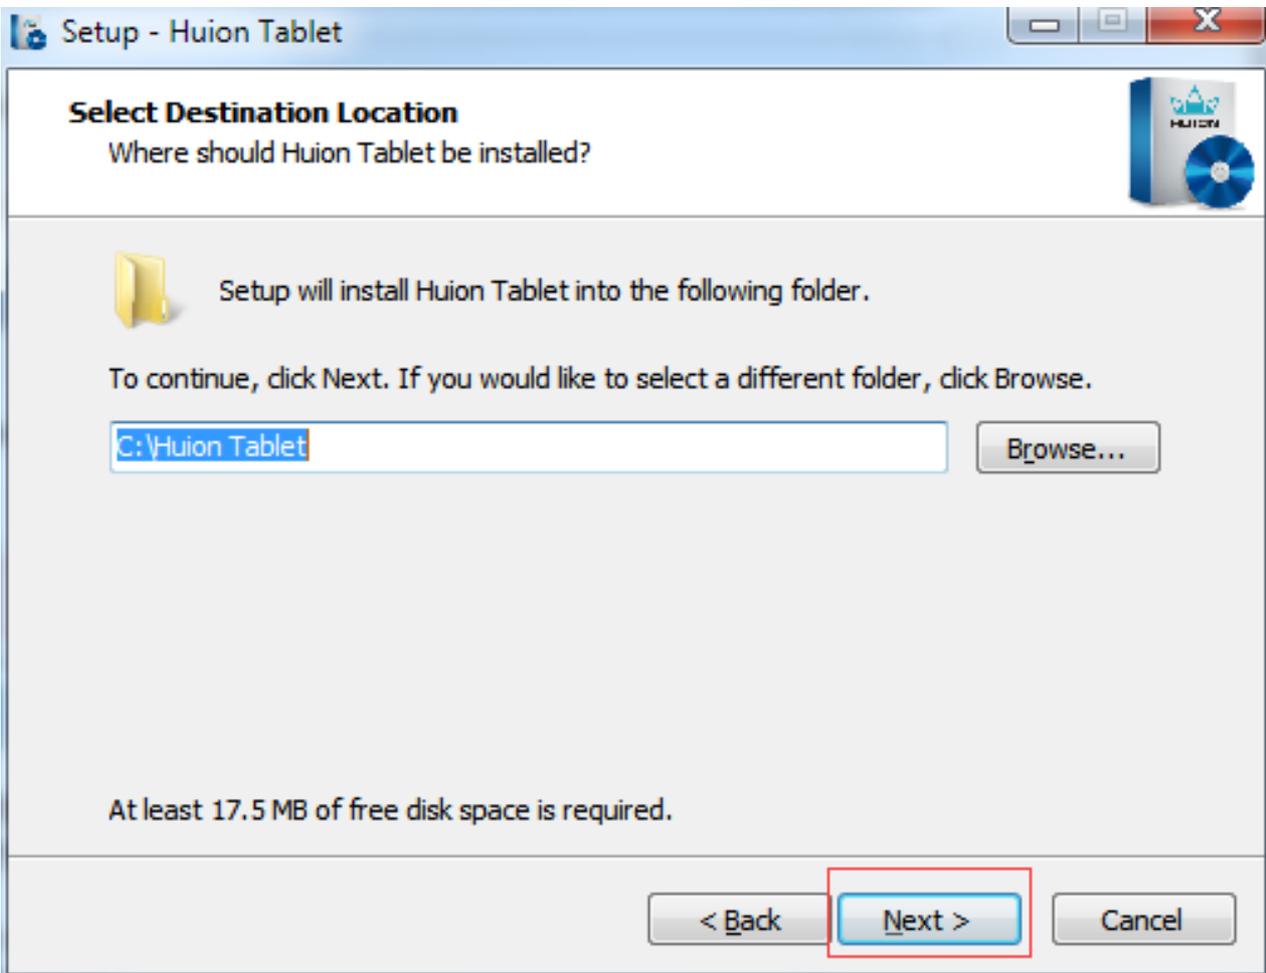

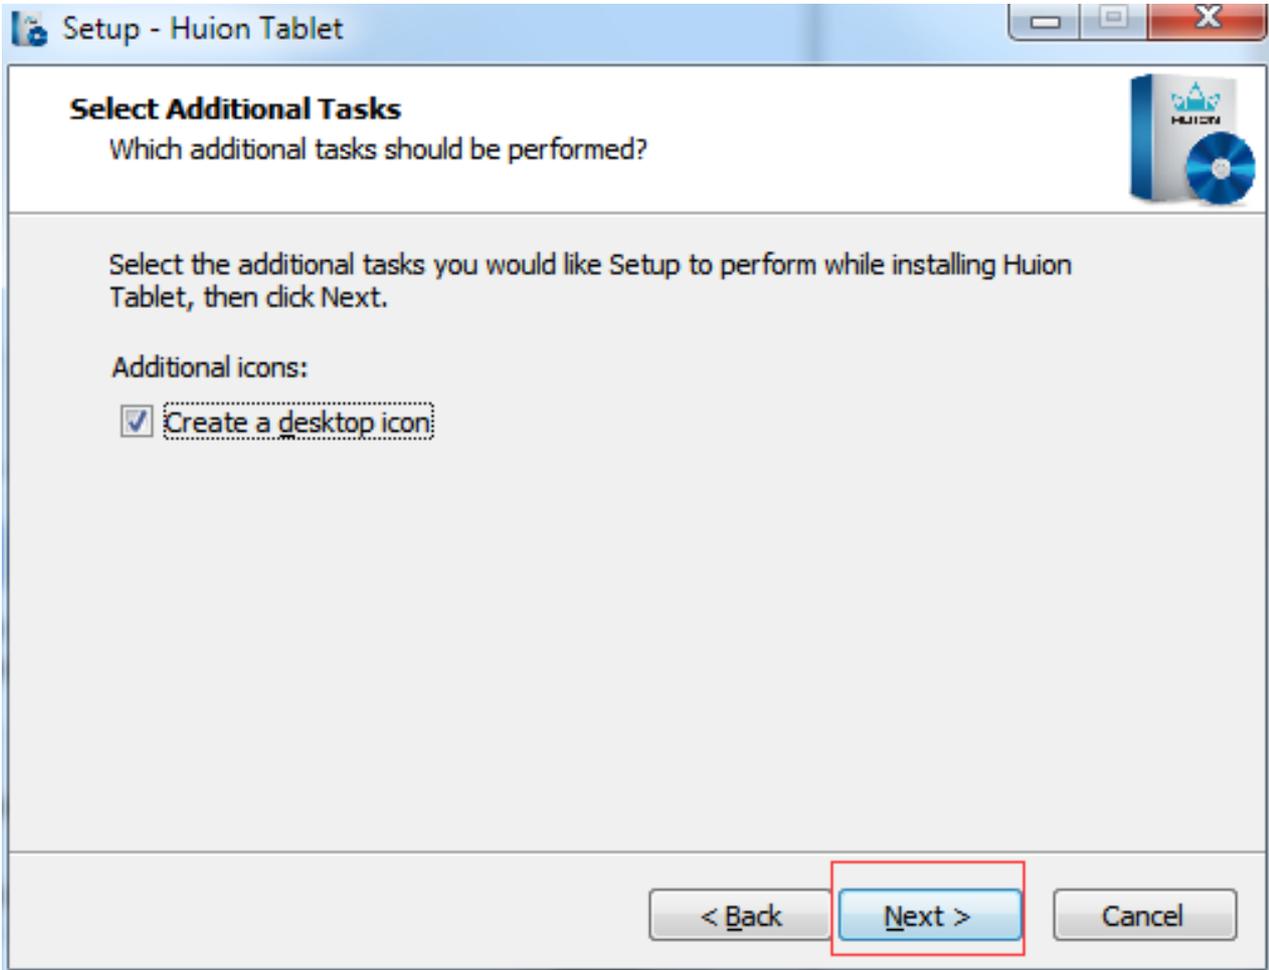


5. Click the *Install* button to start installing the driver.

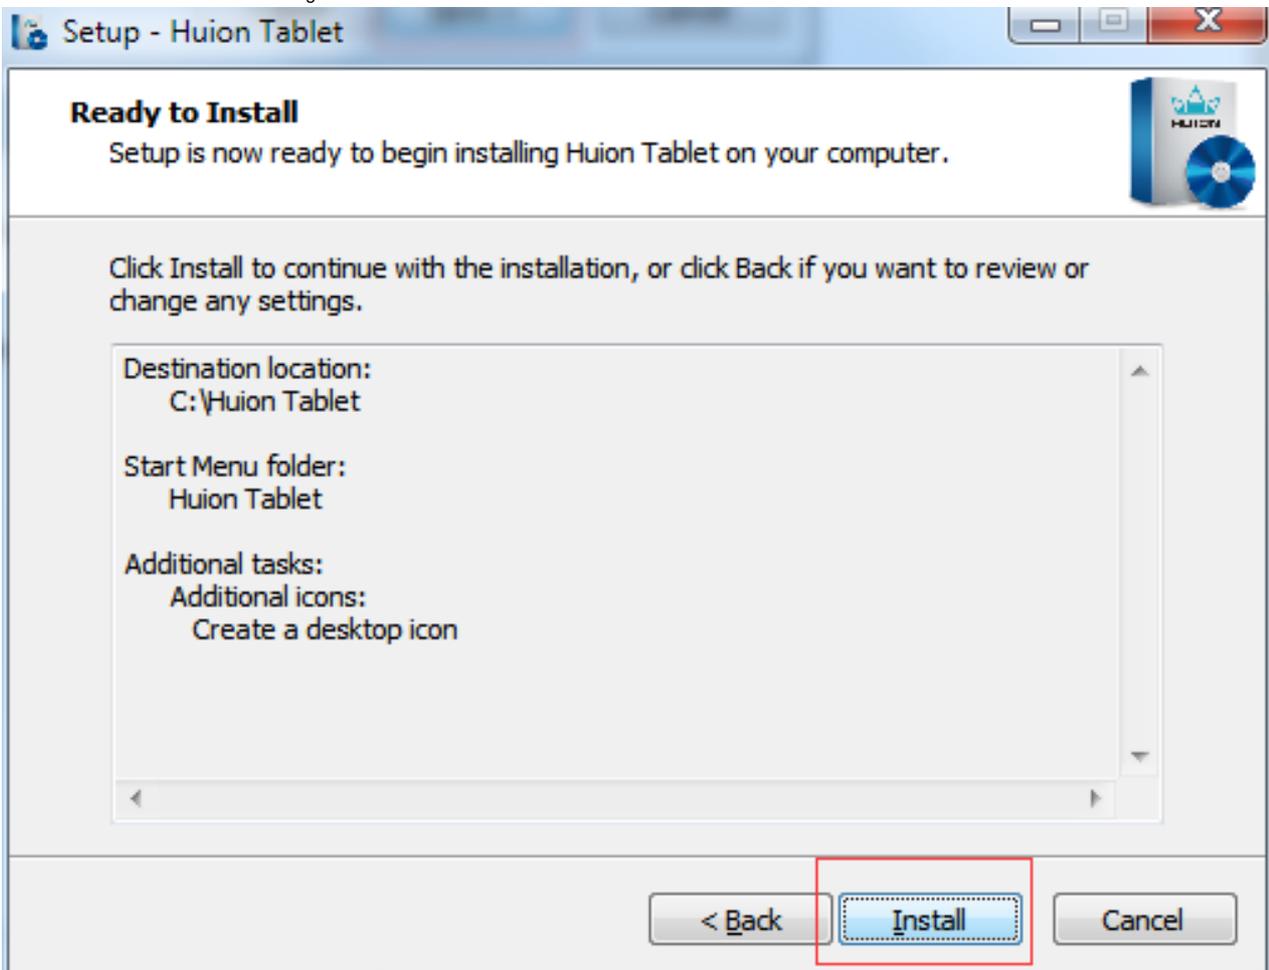

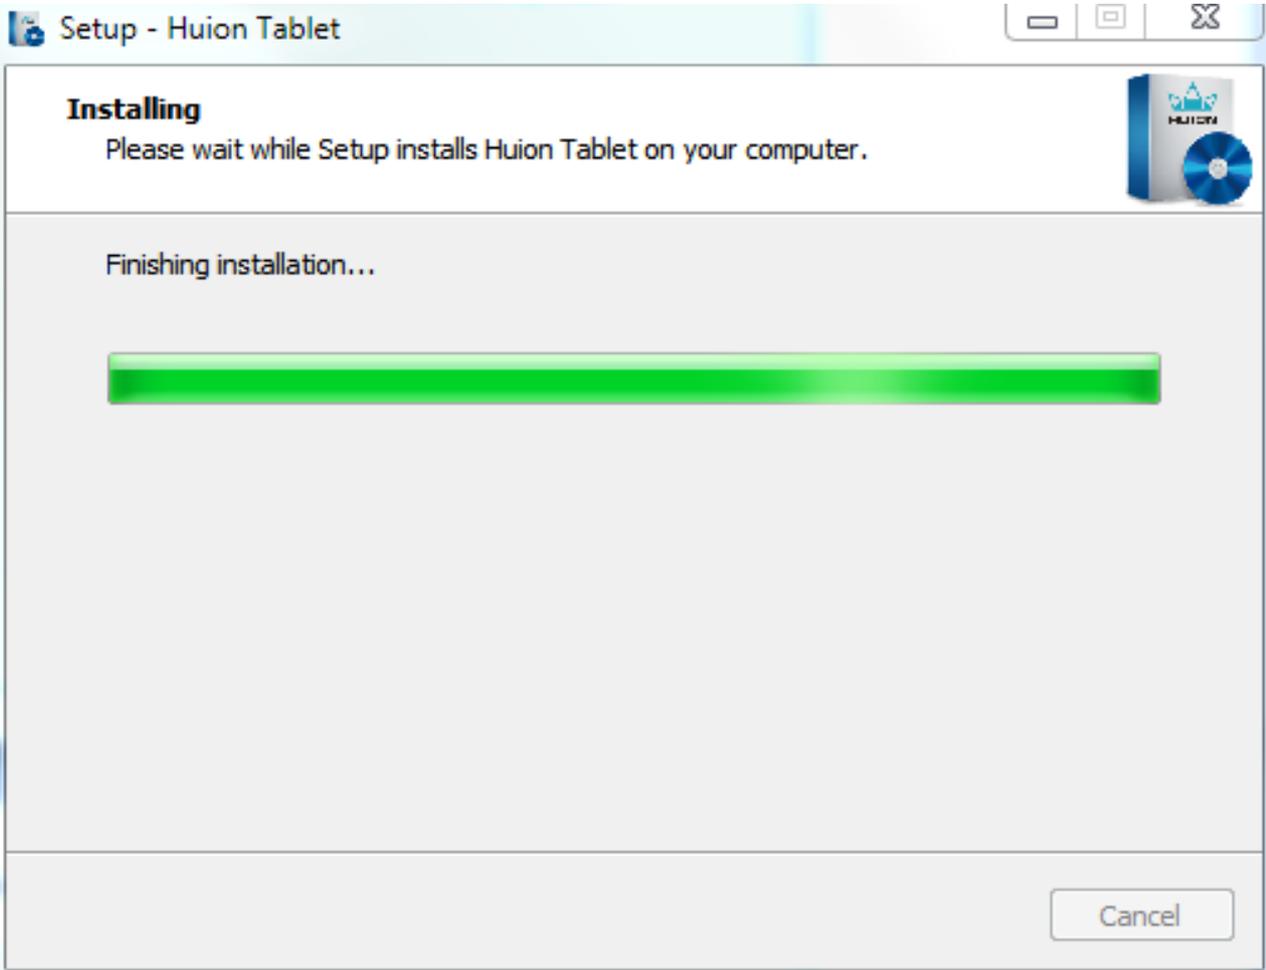


6. Click the **Finish** button to complete the installation.

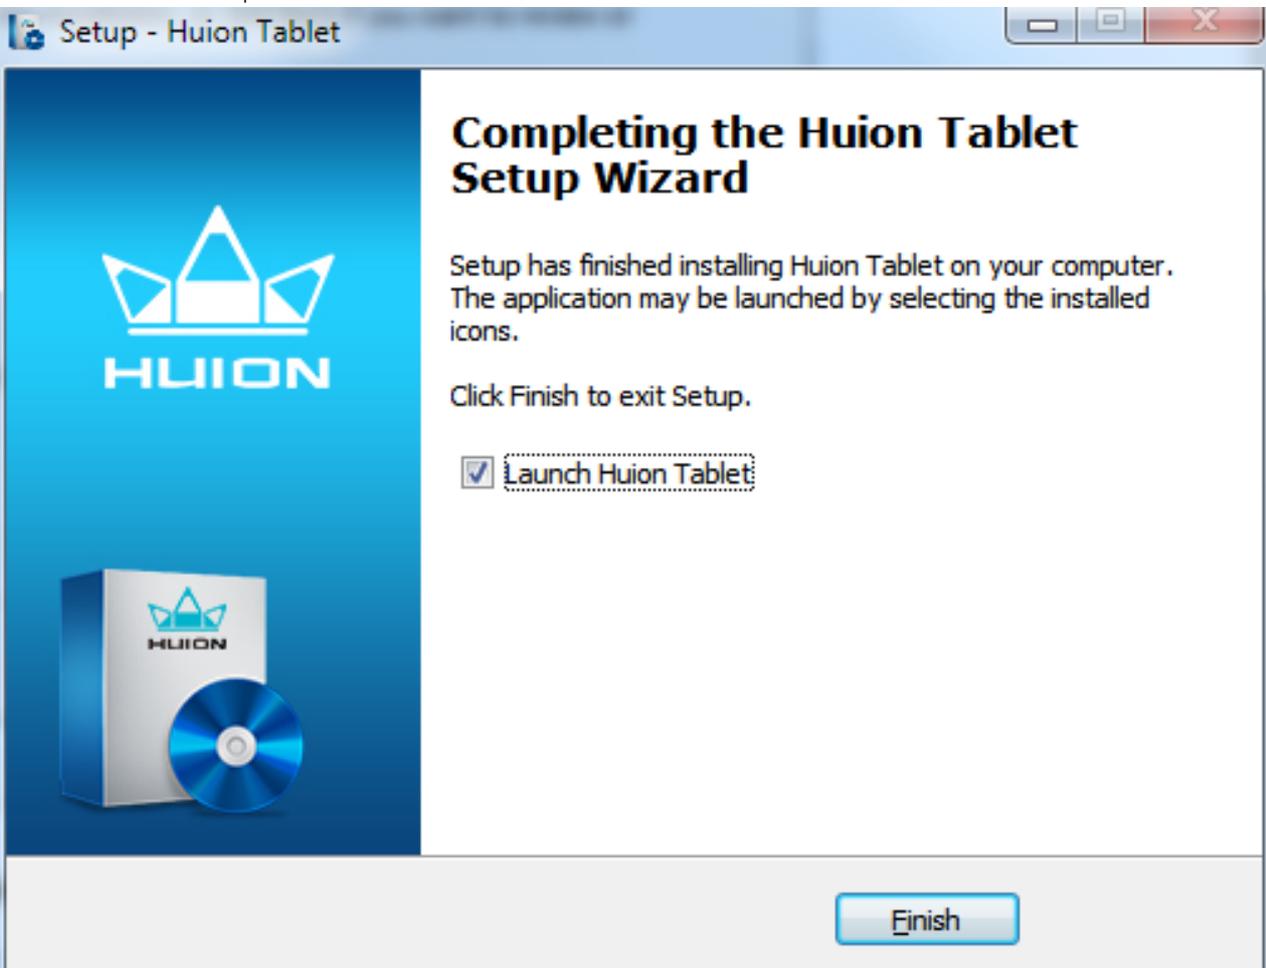

7. Connect your graphic tablet or pen display to your computer via USB /VGA/HDMI/three-in-one cables. The gray icon at the bottom right corner of the desktop will then turn to blue and the **Device connected** will also be shown on the driver interface.


Gray icon Blue Icon

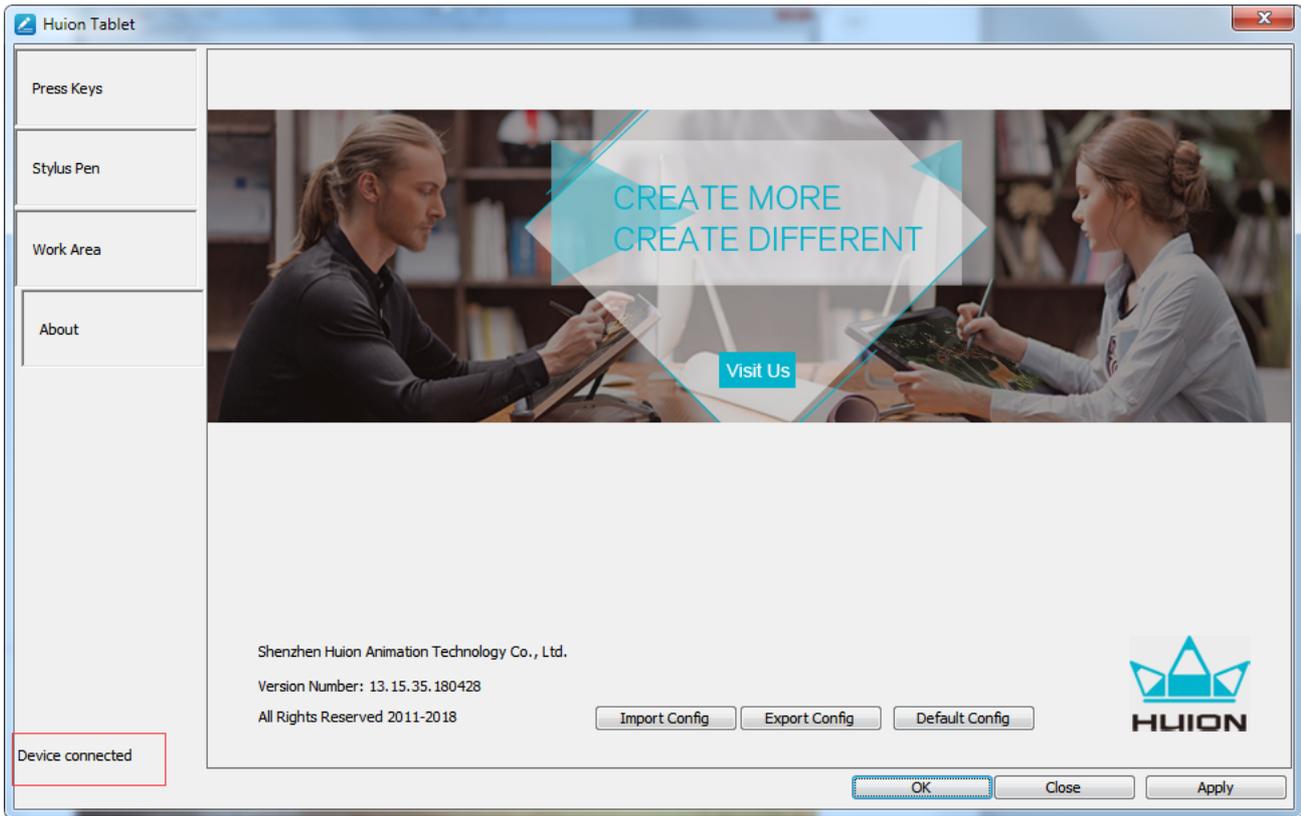

8. You can then **open your drawing or writing program** that you have downloaded and installed from the internet.

Steps for installing the V12 driver

1. Visit Huion's official website(www.huion.com/download (<http://www.huion.com/download>)) and download the driver you need.

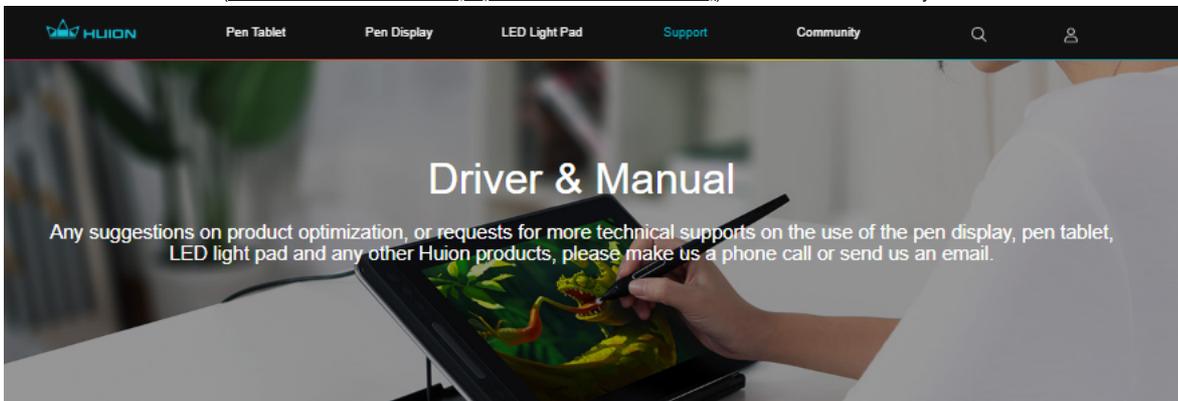

Please enter the product model to download the corresponding driver.

Option 1: Type your tablet model

Popular Model: [NEW 1080PLUS\(\\$192\)](#) [GT-191\(\\$192\)](#)

You may also specify the model and OS to find the driver you need.

Product Model


OS Product Model




Please find your product model and download the driver and instructions.

Option 2: Select your tablet model from the dropdown list, then choose your computer's operating system



2. **Unzip or extract** the file downloaded from our official website. Then, double-click the unzipped or extracted exe file to launch the program.


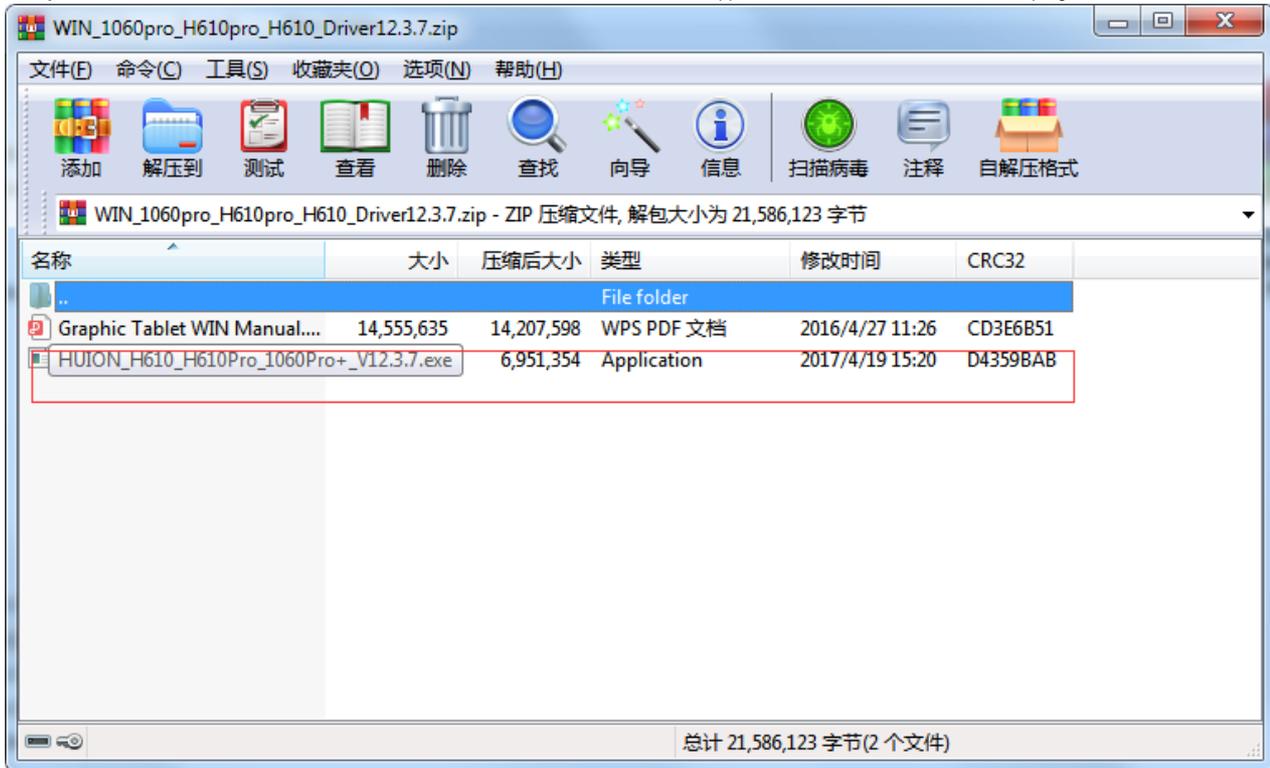


3. Make sure you have closed all painting software and turned off your antivirus before installing the driver and click **Yes** for the next step.


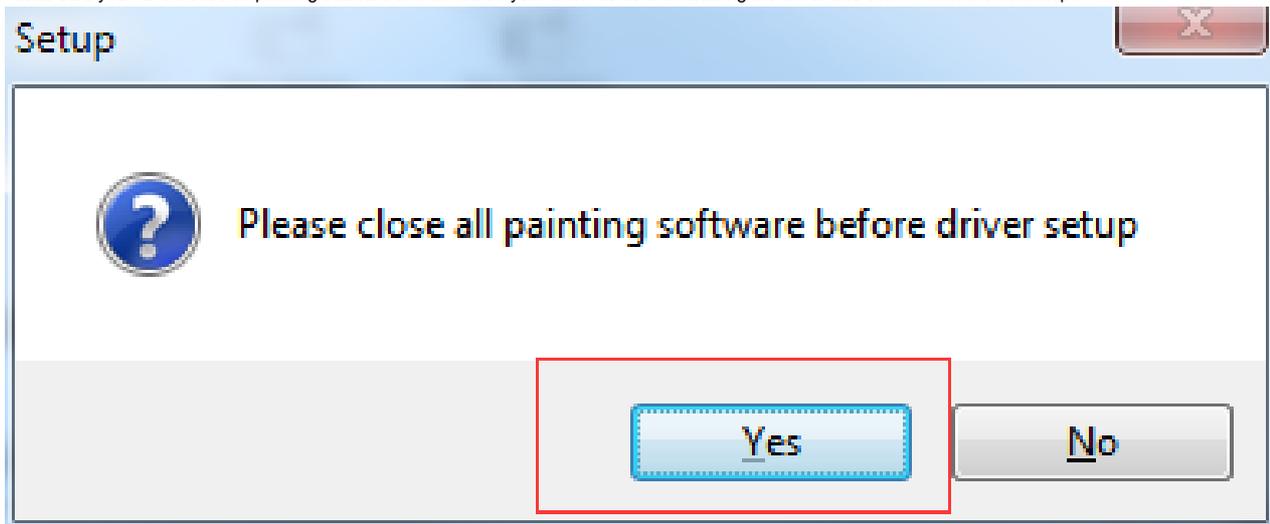


4. Click the **Next** button when the following four prompts pop up.

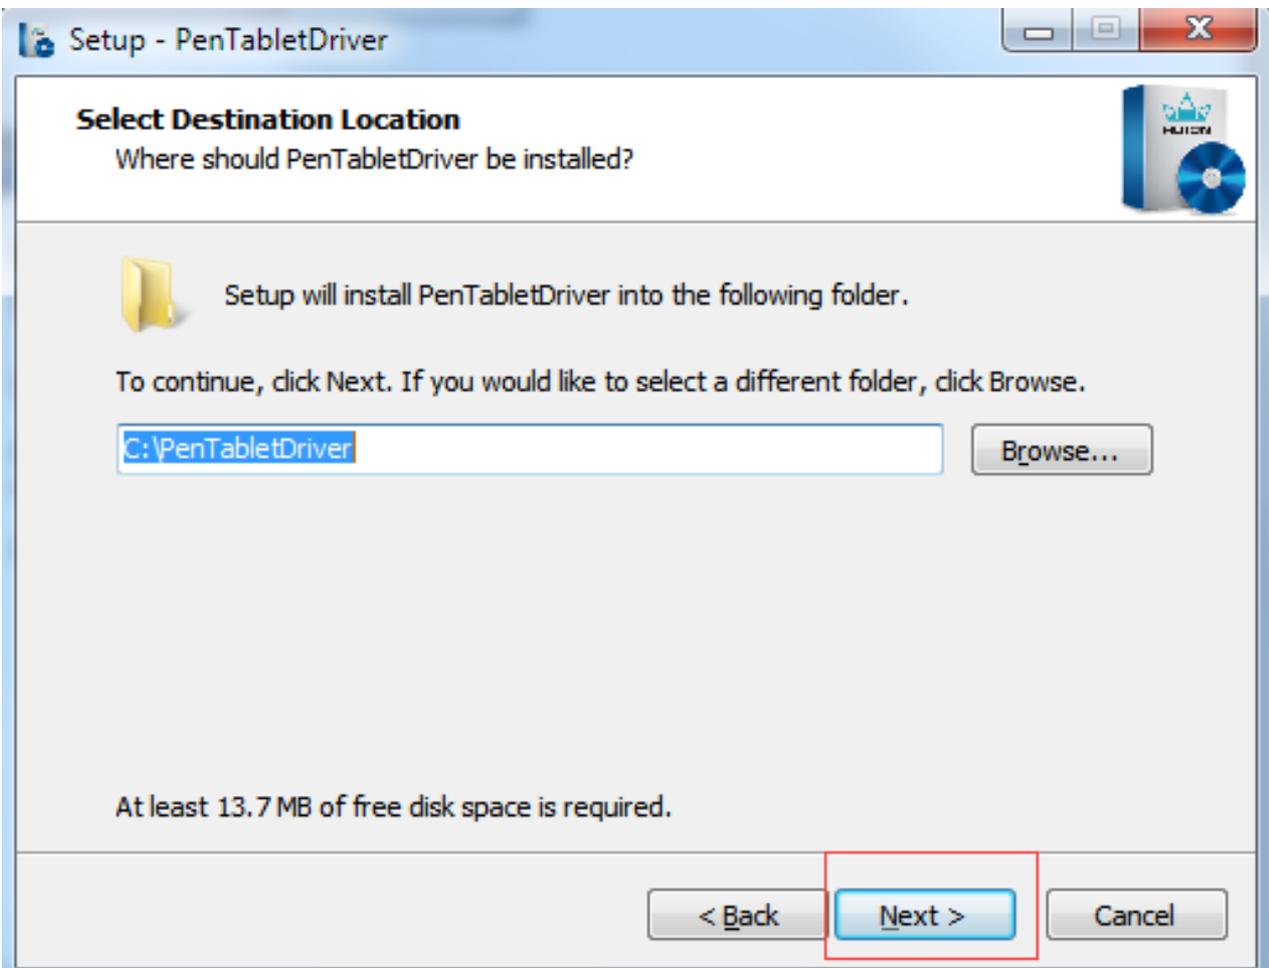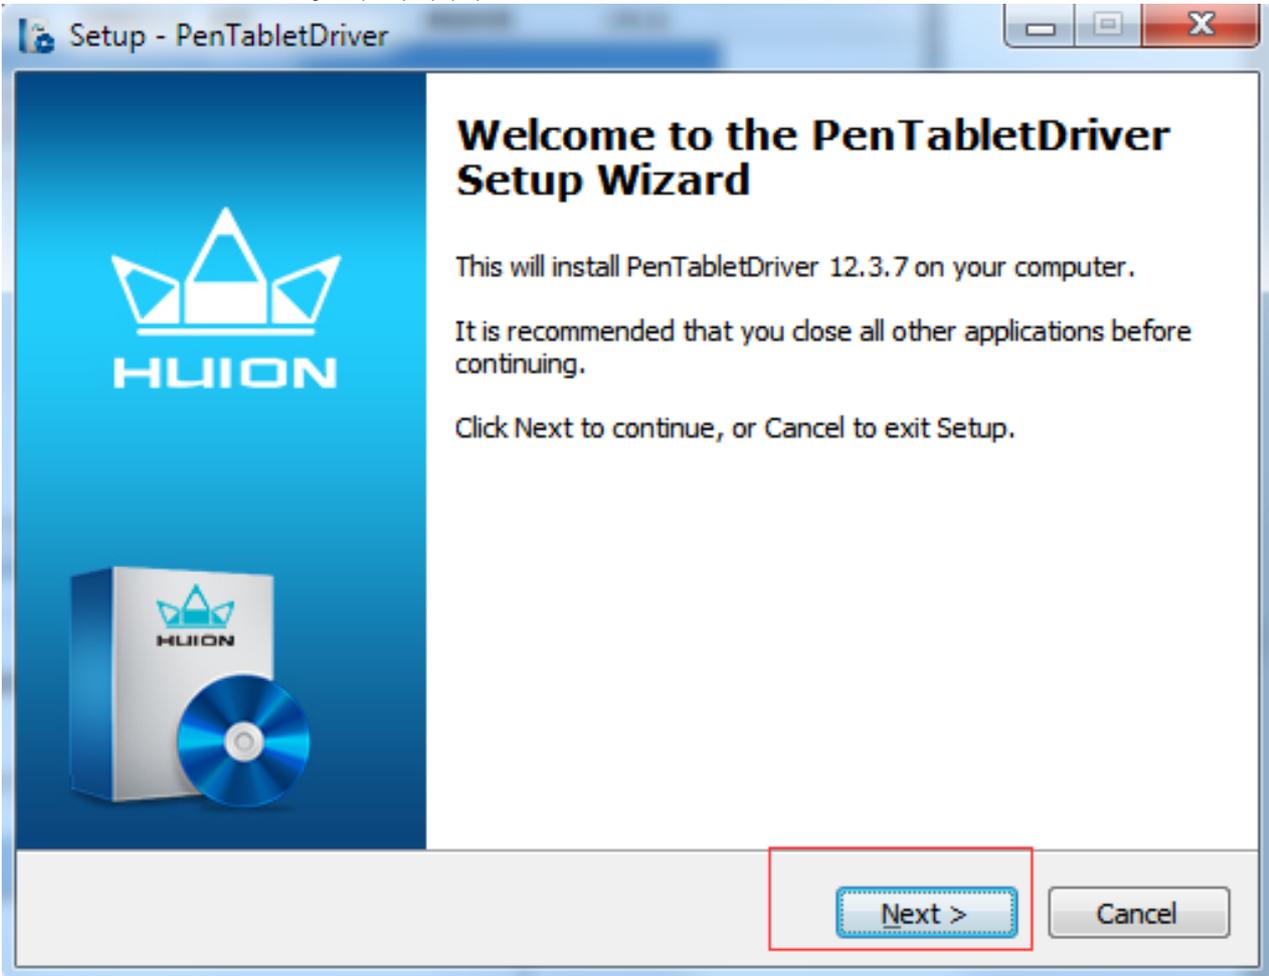


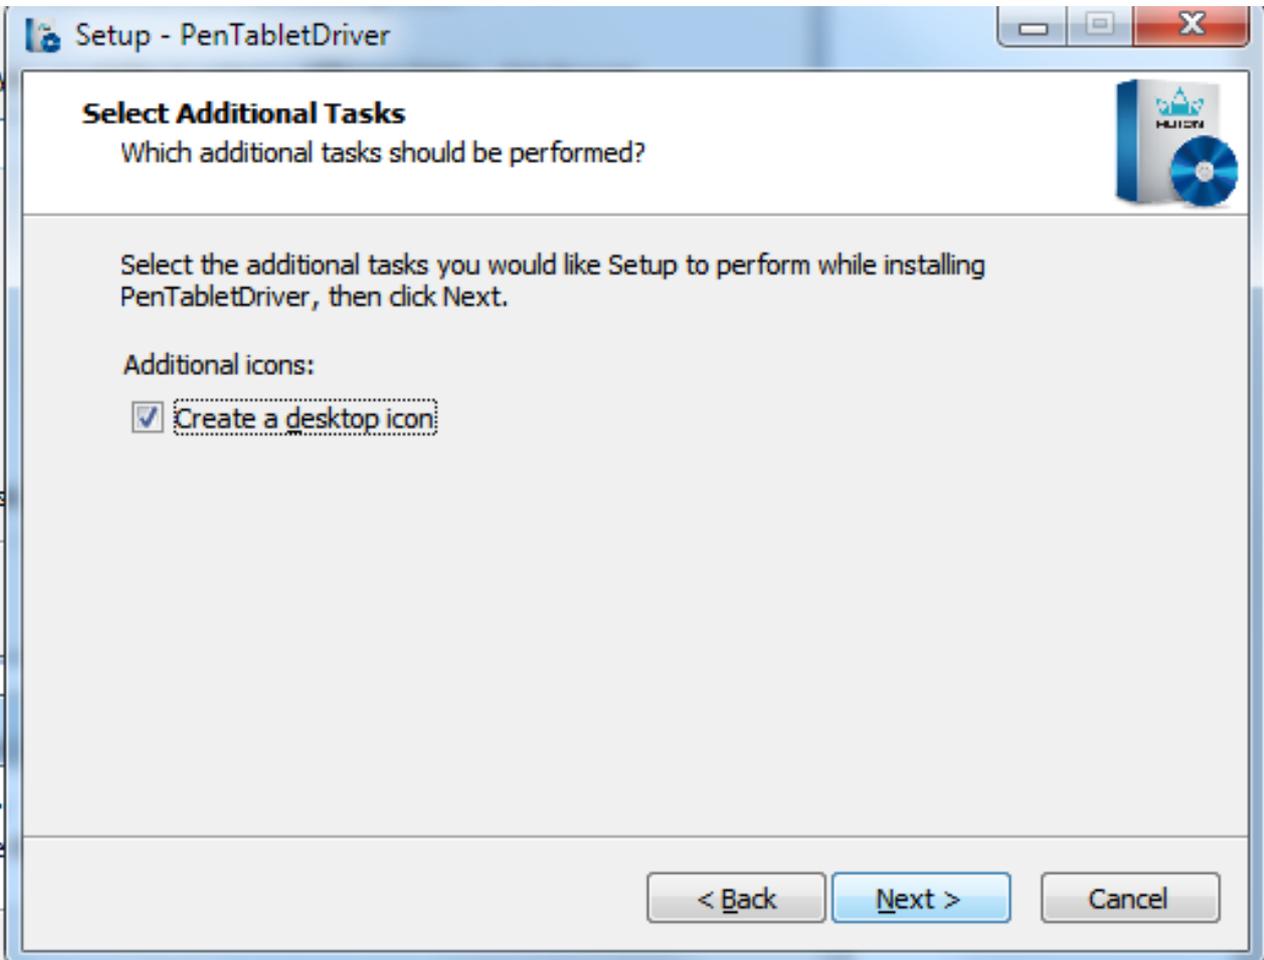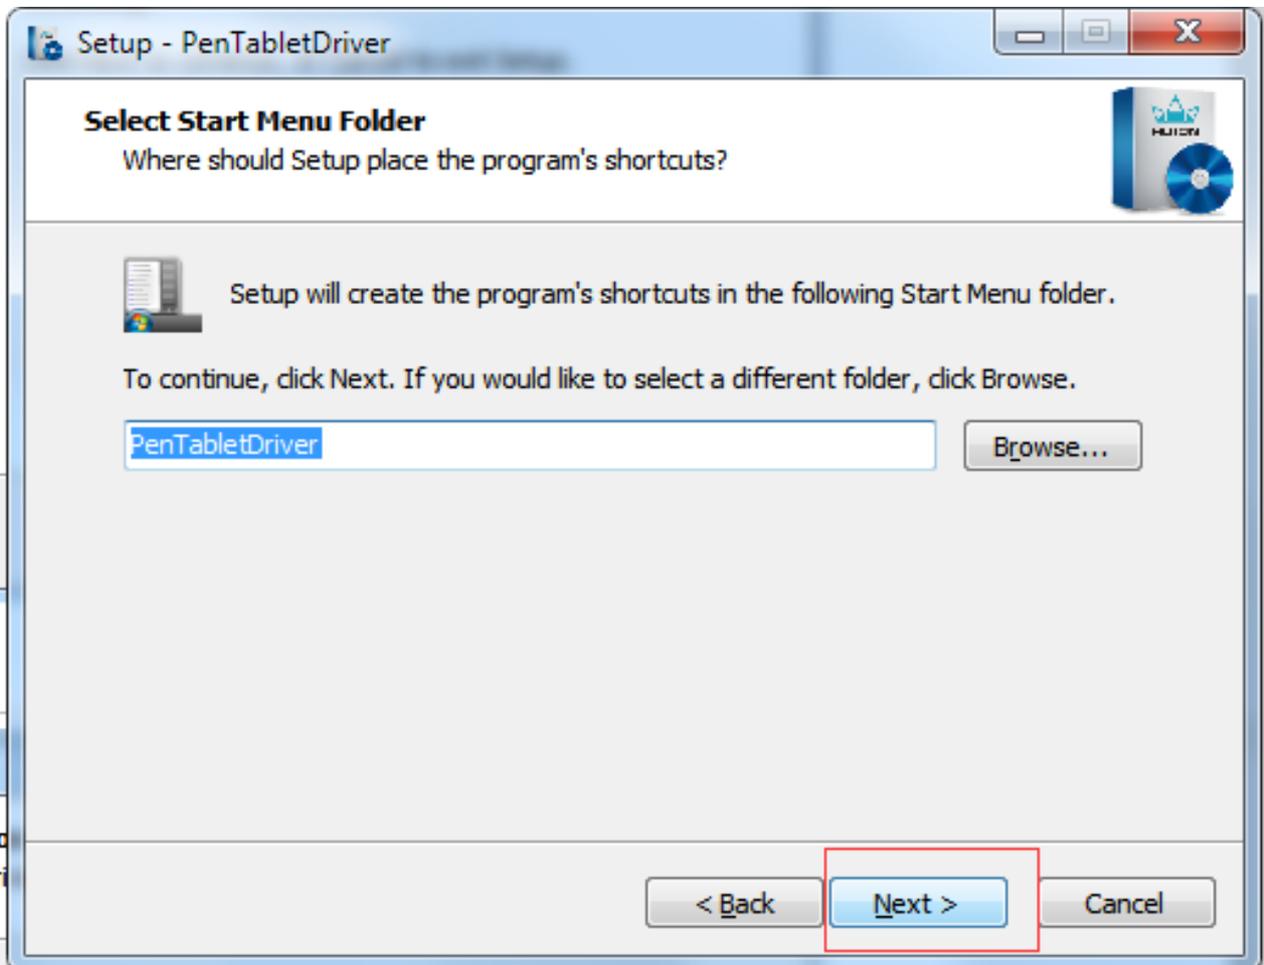

5. Click the *Install* button to start installing the driver.

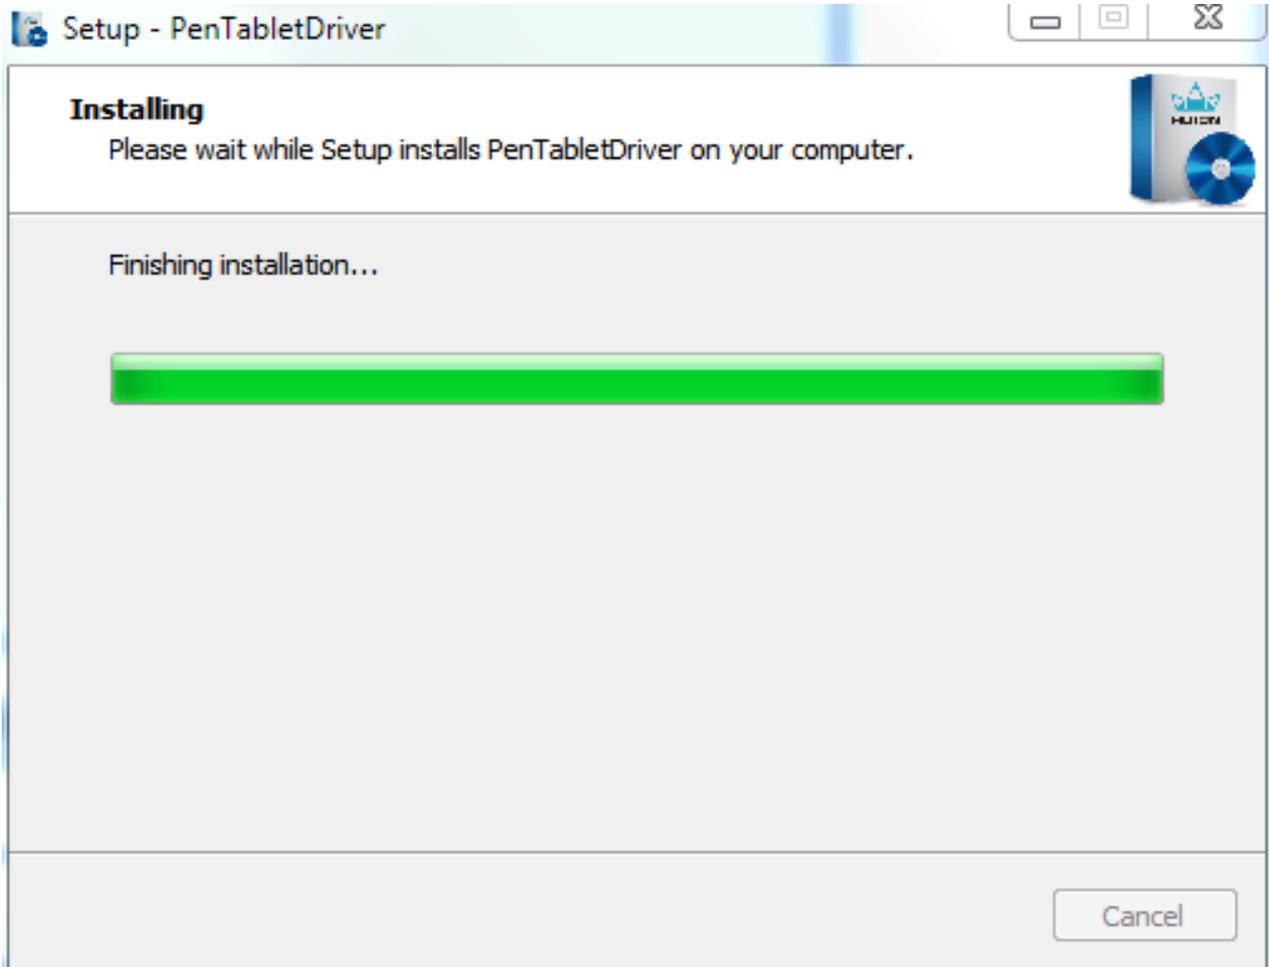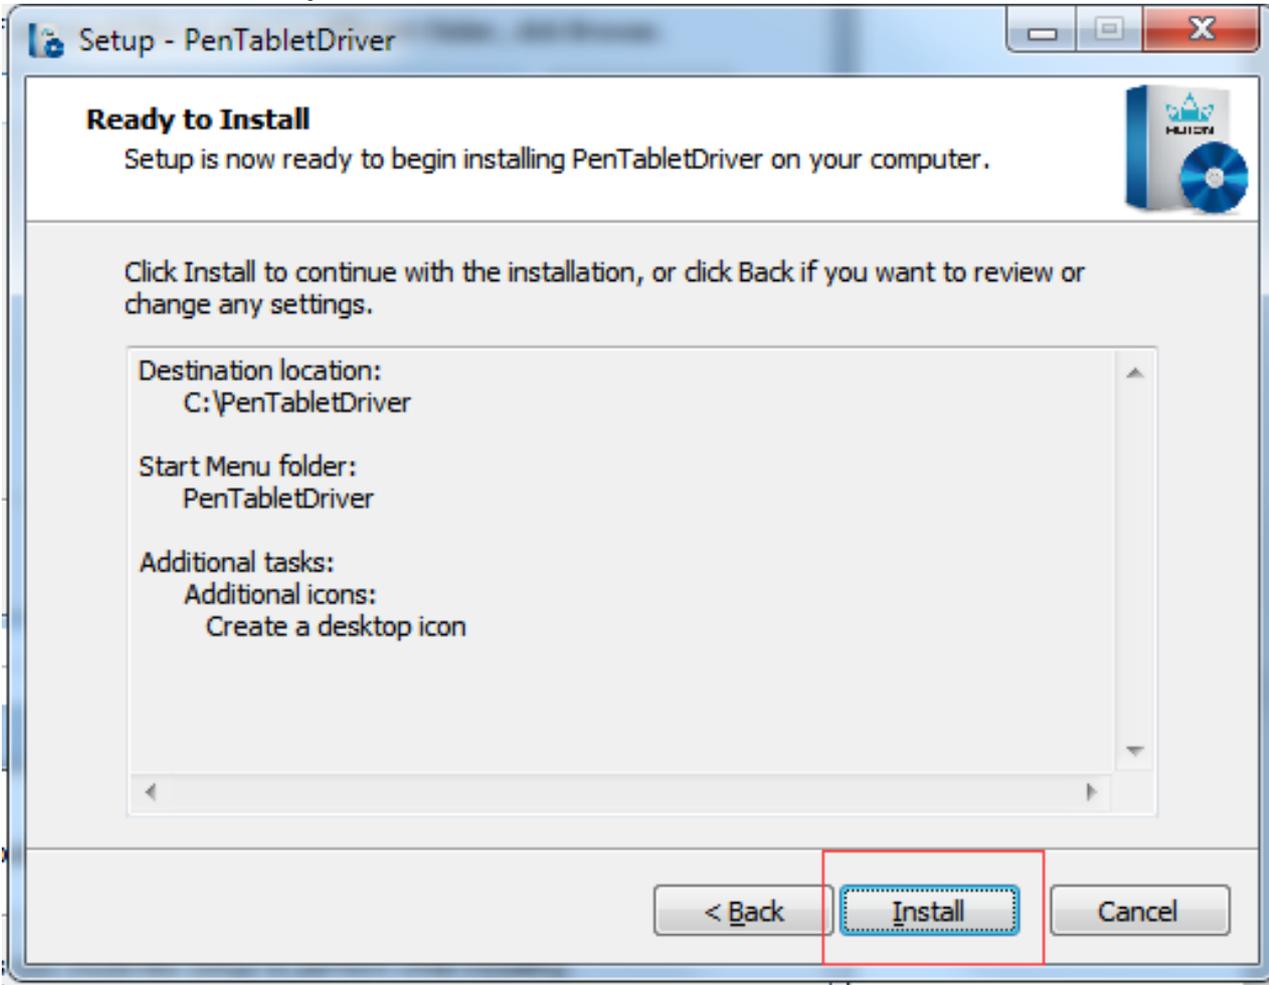

6. Click the **Finish** button to complete the installation.

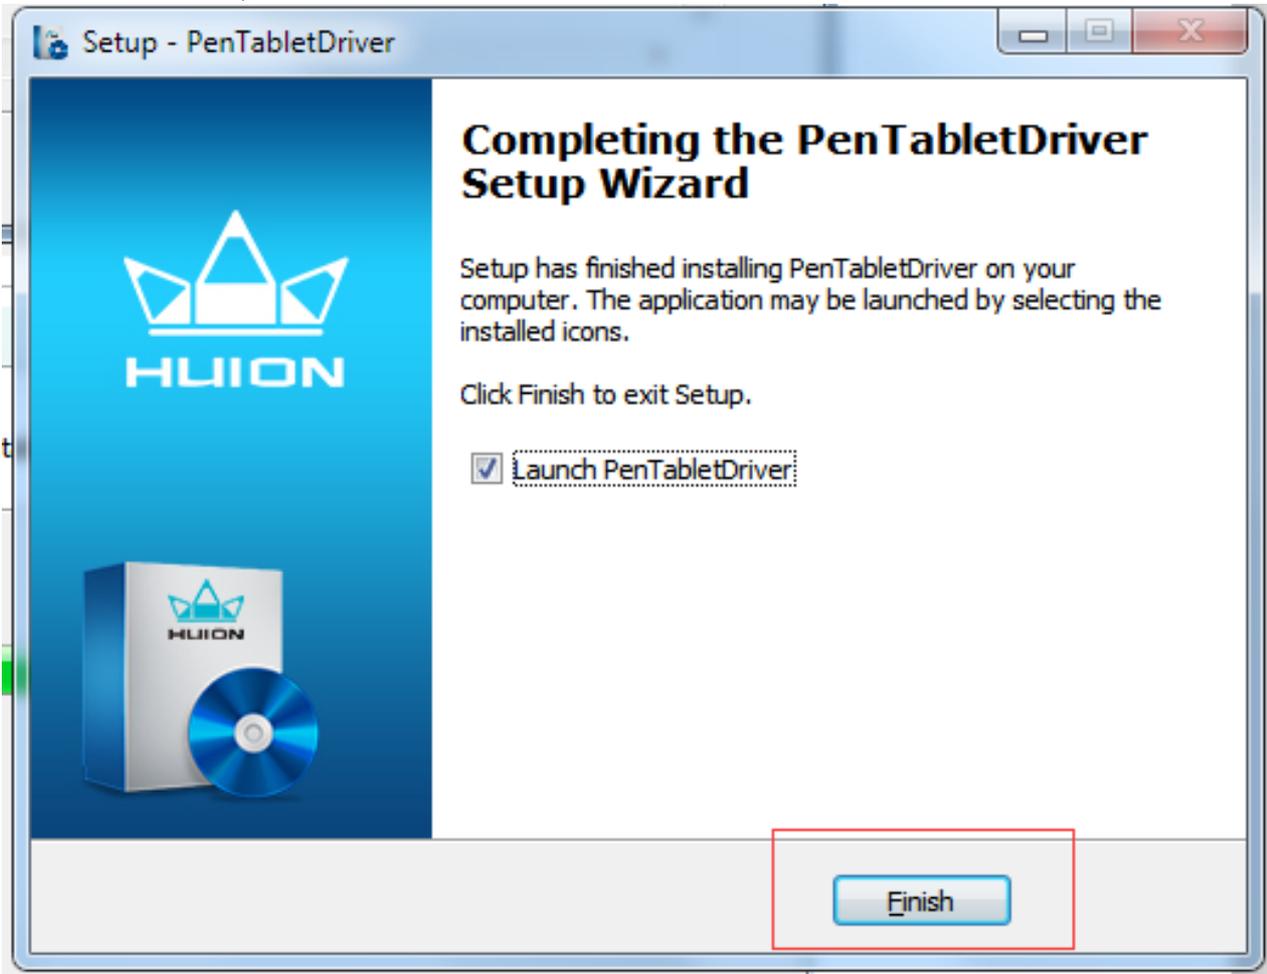

7. Connect the graphic tablet to your computer via a USB cable and the icon at the bottom right corner of the computer will be replaced by the icon without the red "X".




Icon with red "X"



Icon after successful installation

Also, it will show "**Device connected**" on the driver interface as shown in the picture below:

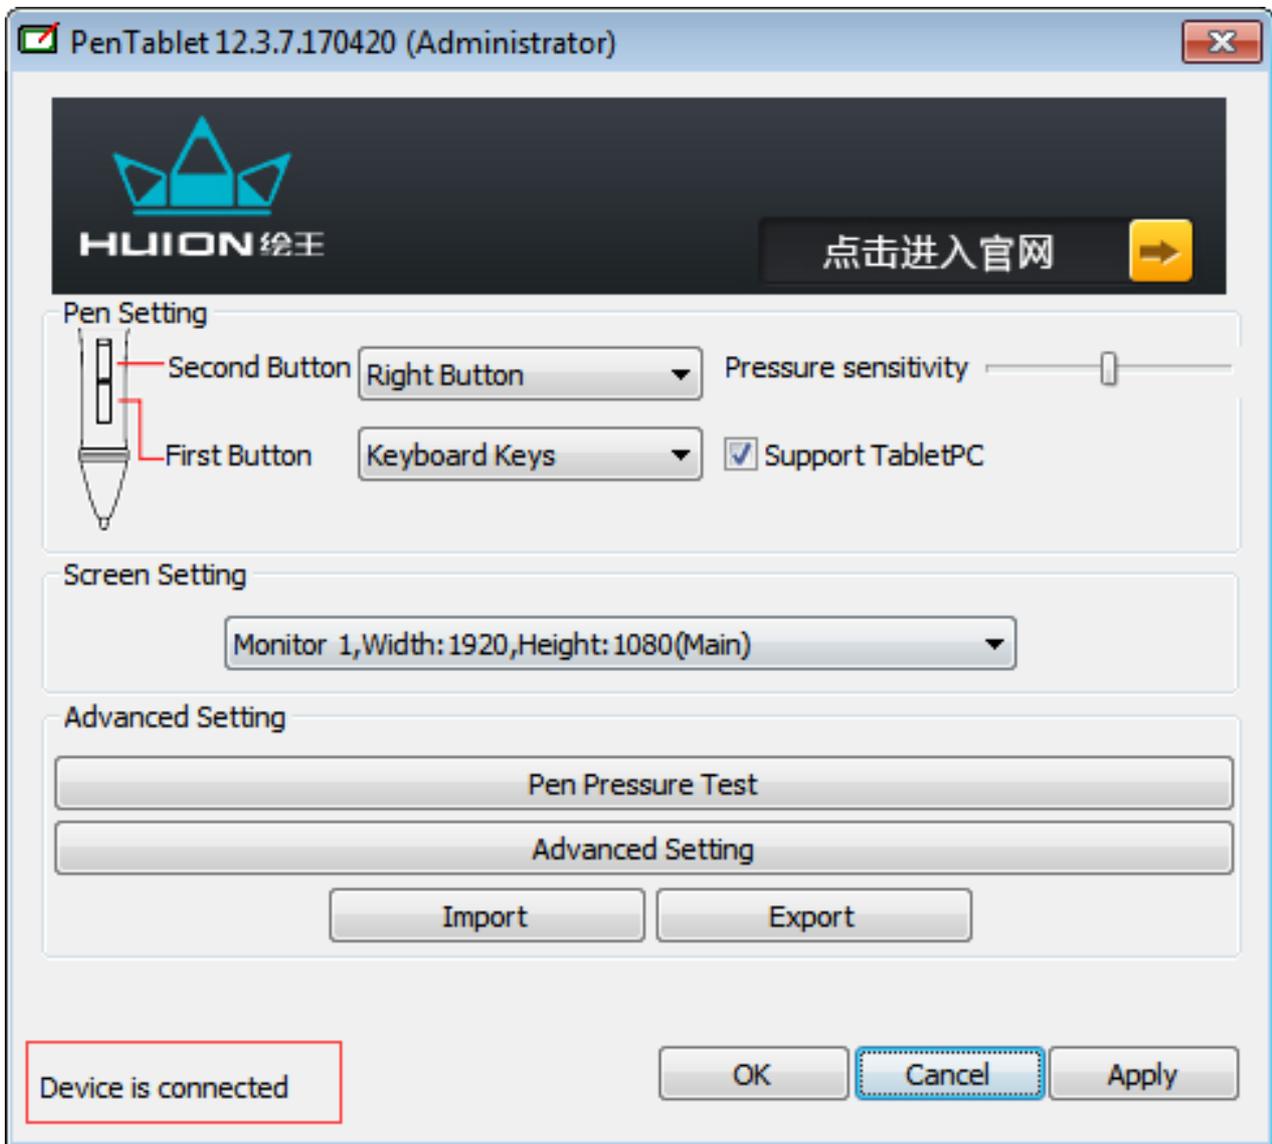

8. You can then **open your drawing or writing program** that you have downloaded and installed from the internet.

- **Facebook** (<http://www.facebook.com/share.php?title=How%20to%20Install%20Huion%20Drivers%20on%20Windows&u=https%3A%2F%2Fsupport.huion.com%2Fen%2Fsupport%2Fsolutions%2Farticles%2F44001163588-how-to-install-huion-drivers-on-windows>)
- **Twitter** (<https://twitter.com/share?lang=en&text=How%20to%20Install%20Huion%20Drivers%20on%20Windows&url=https%3A%2F%2Fsupport.huion.com%2Fen%2Fsupport%2Fsolutions%2Farticles%2F44001163588-how-to-install-huion-drivers-on-windows>).

Related Articles

- [Driver Installation Reminders \(Illustrated\)](#)
- [How to Install Huion Driver on MacOS](#)
- [How to Install/Uninstall Huion V14 Driver on Windows \(Video\)](#)
- [How to Uninstall Version 15 Driver \(Windows\)](#)
- [How to Install/Uninstall Huion V14 Driver on Mac OS \(Video\)](#)
- [How to Replace Huion Pen Nibs](#)
- [Setting Up the Left-hand Mode for Your Huion Tablets](#)
- [How to Update Your Huion Tablet's Firmware\(Windows\)](#)
- [How to Customize Press Keys and Digital Pen Button Functions for Specific Software](#)
- [How To Replace Your Pen Nib](#)
- [How to Uninstall Version 15 Driver \(MacOS\)](#)
- [How do I connect the Huion Mini Keydial KD100 to my computer?](#)
- [Which driver should I download to use Huion KD100\(Mini Keydial\)/K20\(Keydial mini\)?](#)
- [How to Set Up & Use the Radial mode on Huion Inspiroy Keydial KD200, Inspiroy Dial Q620M and Mini Keydial K20 & KD100?](#)
- [How to Set the OSD \(On-Screen Display\) menu in Huion Kamvas Pro 13&16 \(2.5K\)?](#)
- [How to Install and Uninstall the Drivers on Linux Devices](#)
- [What types of installation packages are available for Linux driver](#)
- [What do blue, yellow and red squares mean respectively in Pressure Sensitivity Adjustment in the driver? What do the X-axis and Y-axis represent?](#)
- [How to Update Your Huion Tablet's Firmware\(Mac\)](#)
- [V15 Driver Settings](#)
- [How to disable the yellow notepad on MacOS Mojave and older versions?](#)
- [How to use hotkeys to Switch Screens](#)
- [How To Set Switch Screen Function on KD100/Keydial Mini](#)
- [How to disconnect Bluetooth manually on Huion devices](#)

- [How to turn off the virtual keyboard](#)
- [How To Uninstall V12 Drivers on Windows](#)
- [Answers to Questions in Using Huion with Mac Computers](#)
- [What Types of Adapters Can I Use with My Mac?](#)
- [How to output capital letters after you set shortcuts](#)