


Miaosical

Dual Pets Automatic Feeder **User Manual**

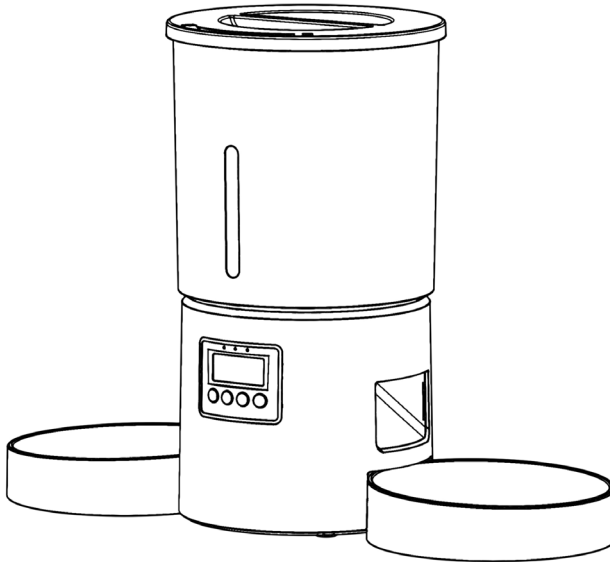

Model:SC-A80K

Please read this manual carefully before using

Brand Owner To You

Hello, dear customer,

Hope you and your family (including your furry friends!) are doing great.

I offer my sincere thank you for your purchasing our dual pets automatic feeder.

How I choose a good name for my brand when I decide to make pet feeders?

I hope that every kitty meows like musical happily in every pet owners' home, that's the brand name MIAOSICAL's meaning.

I love cats, dogs and small animals as you do. I hope our pet feeder help you keep your pets healthy and happy, while free your time and hands.

I have a small request: **If you like our pet feeder, could you share your happy experience with us or other pet owners? If you don't like it, could you please contact us before return the product ?** I and my team are always ready to provide excellent help to you. Our customer support will make you 100% satisfied.

Thank you again for your time.

Best regards,

Brand Owner: Rihao Zhang

support@miaosical.com

www.miaosical.com

| CONTENTS

Warranty	1
Safety Warning	1
Package List	4
Product Structure	5
LED Display Panel	6
Before Using	7
Assemble The Feeder Procedure	8
Feeding Schedule Setting	12
Cleaning and Maintenance	16
How To Use the Stopper	20
Suggested Feeding Amount	22
Automatic Pet Feeder Specifications	23

Do you have any better ideas to improve our manual?
Don't hesitate to contact us.

Warranty

We offer 1 year limited after sales warranty since your purchase day. For more information of warranty policy, please visit our website warranty page at www.miaosical.com/warranty.

As users of our product, you don't worry any problems, our customer support team can be reached in 24 hours of any day: support@miaosical.com

For better serve your need, could you please register your purchased product on our website: www.miaosical.com/warranty/warranty-register, or scan below QR code on your mobile browser:



Safety Warning

For Pet Use Only – This feeder is designed for cats, small dogs, and small animals. Do not use it for large dogs or other animals or livestock.

Indoor Use Only – Keep the feeder in a dry, indoor environment. Do not expose it to rain, moisture, or extreme temperatures.

Supervise Initial Use – Monitor your pets when first using the feeder to ensure they interact with it safely.

Use Appropriate Food – Dry pet food only in the food container. Do not place wet food, raw food, or treats that could clog the dispenser to the food container. Wet food, raw food, water or treats can be manual placed in the bowls only.

Power Safety – If using an adapter, ensure it is properly plugged in. If using 3 D cell batteries, replace them every 4-6 months to prevent power failure. We suggest alkaline batteries.

Secure Placement – Place the feeder on a flat, stable surface to prevent falling off or spilling.

Do Not Submerge in Water – The machine main unit is not waterproof, do not clean it with water.

Regular Maintenance – Clean the feeding bowls and food compartment regularly to prevent contamination.

Keep Small Parts Away from Children & Pets – Some components may pose a choking hazard.

Desiccant Bag is Inedible –Don't break up the desiccant bag or mix it with pet food.Replace the desiccant bag every month to keep pet food Dry and Fresh.

Do not disassemble the feeder main body by yourself.Do not modify feeder base inside units.


Before cleaning the product,please unplug the power plug.

In case of power outage,for your pet's safety, please use both the power plug and D cell batteries simultaneously.If you use D cell batteries only ,check the remaining battery level periodically.If traveling for a long time, please replace the batteries with new ones.


Failure to follow these safety instructions may result in malfunction, injury, or damage to the product.

If you experience any issues, discontinued use,please contact our customer support support@miaosical.com.

Package List




Feeder Base
x 1



Pet Food Container
x1




Lid
x1



ABS Bowl
x2




Stainless Steel Bowl
(Optional) x2



Stopper
x1



Dessicant Bag Cover
x1



Power Adapter
x1



Charging Cable
x1



Dessicant Bag
x1




Package Box
x1




User Manual
x1

Product Structure

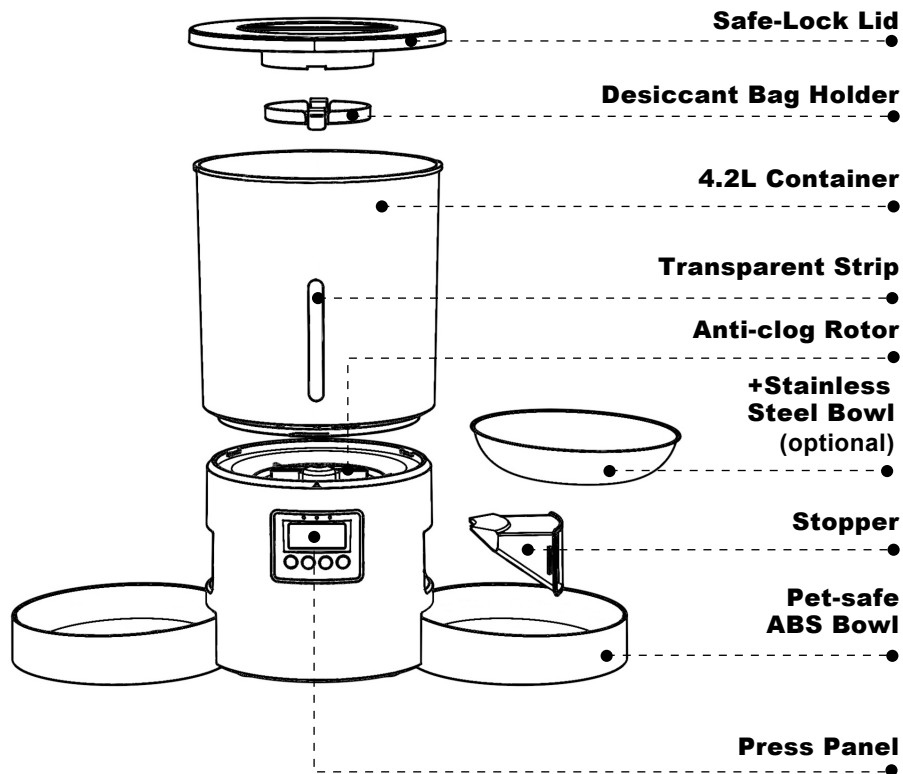

LED Display Panel

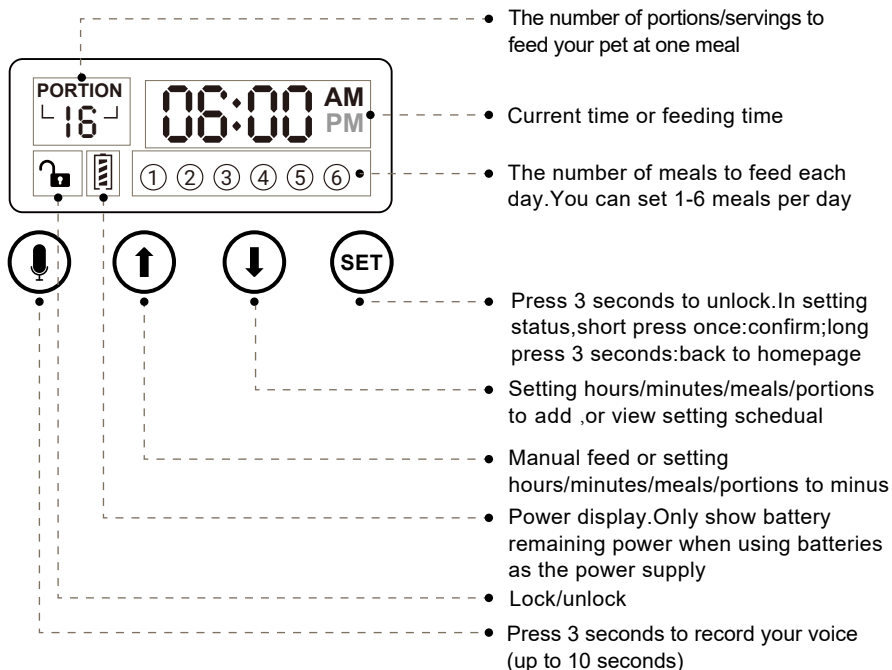


Feeding schedule setting steps:

firstly set the current time→secondly set feeding meals quantity each day→thirdly set feeding time for each meal→fourthly set quantity of portions for each meal→fifthly set the meal call voice.

Before Using

When you receive the feeder product, don't hurry to use.

Take out all units and check no parts missing.

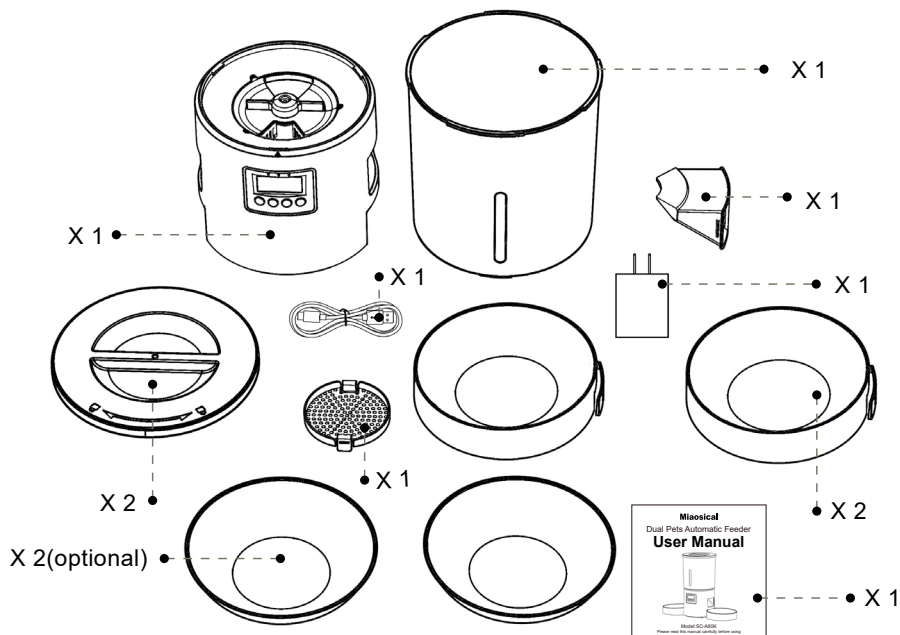

If you find some parts missing or the feeder had been used before,
contact us immediately: support@miaosical.com

Assemble The Feeder Procedure

Scan below QR code to
watch this step video:





1. Assemble the Feeder Main Body with Food Bucket



Hold the feeder main body in one hand, hold the food bucket on another hand, then rotate the food bucket in the feeder main body until they are locked together.

Note: food bucket transparent strip and the display panel is on the same horizontal line.

1

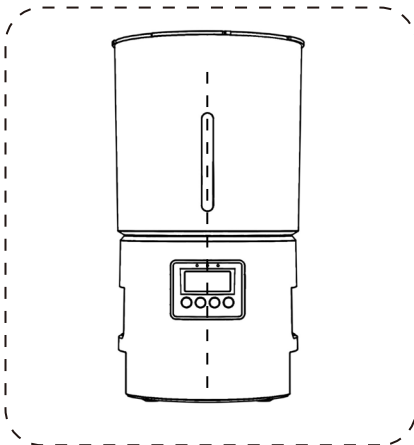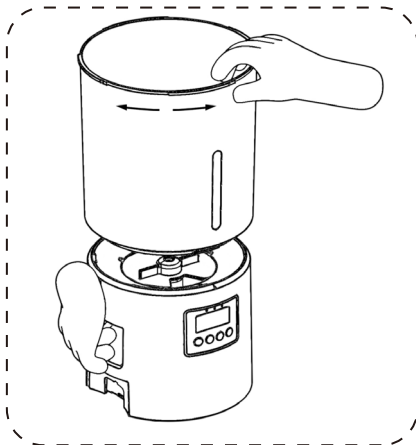

2

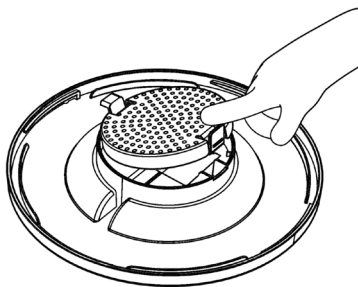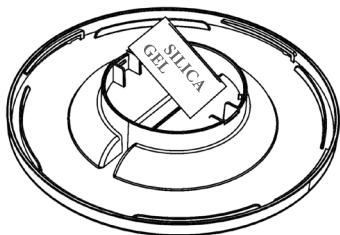


2. Assemble the Lid with the Desiccant Bag Holder



Place the desiccant bag into the lid, press cover both sides with your fingers.

3. Install the Power Cord and Batteries

3

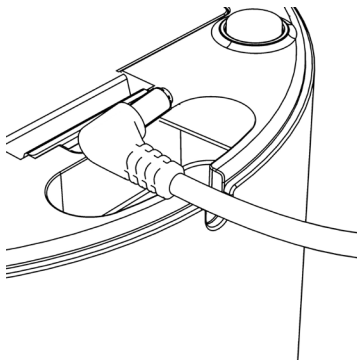

4

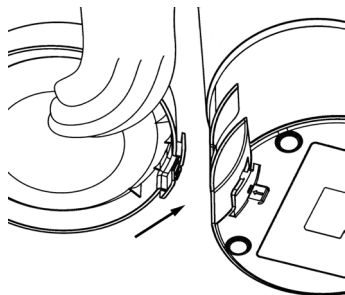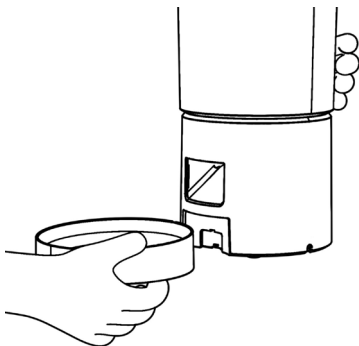


4. Assemble the Bowls

Hold the feeder main body upside down in one hand, then place the bowls into the lock position with another hand.

5. Pour Dry Pet Food into the Food bucket

5

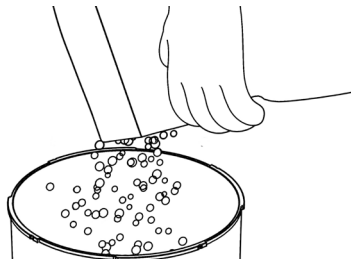

6. Assemble the Lid into the Food Bucket

Hold tightly the food bucket in one hand, hold the lid on another hand, then rotate the lid to the lock location.


7. Connecting the Power Supply

Plug the USB power adapter into your power outlet, the panel display will light up automatically, indicating that the feeder is ready to use, then begin to next setting.

6




7

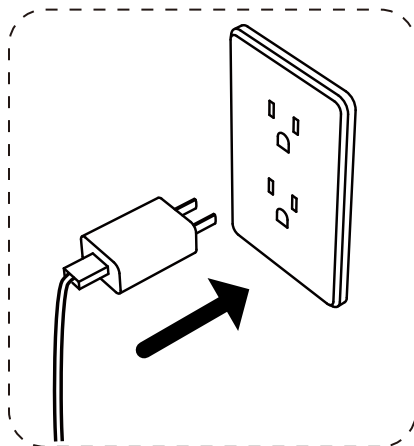

Feeding Schedule Setting


Scan the right QR code
to watch this step video:

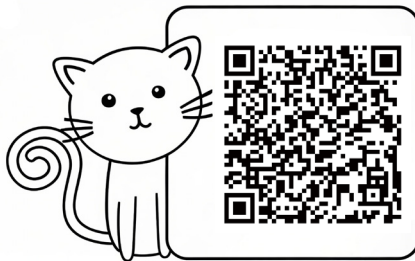

1. Current Time Setting

After power on, long press the **SET** button into unlocked status, then begin schedule setting.


In unlocked status, the numbers field will flash, then press **↑** **↓** to set the current time hour, after setting hour 1-12, AM or PM, press **SET** button to set minute 00-59.

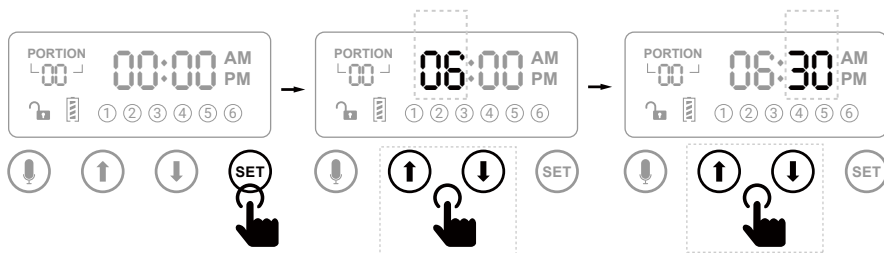

2. Daily Meals Number Setting

After setting the current time, press **SET** button to set 1-6 meals daily.


Use **↑** **↓** button to set meals number, then press **SET** button.

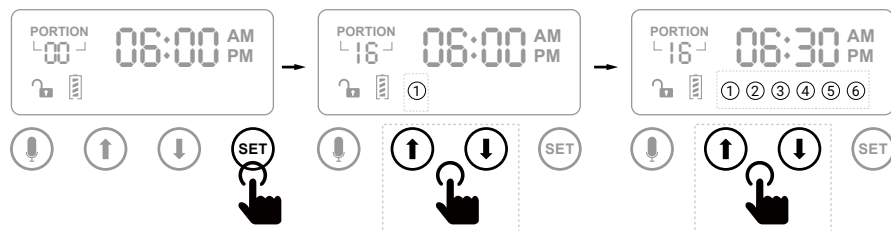

3. Each Meal Time Setting


After setting the meals number, press **SET** button to set meal time for each meal.

Use **↑** **↓** button to set each meal time hour and minute.

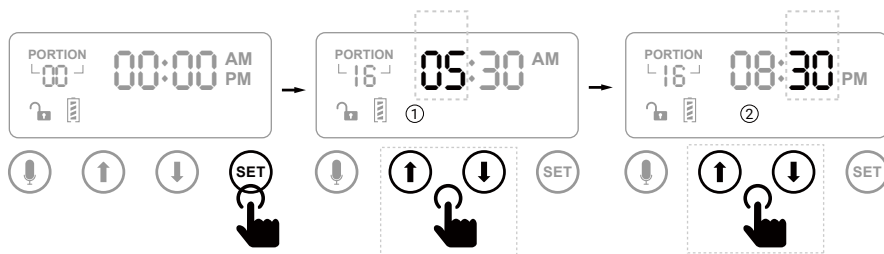


4. Portions Setting

After setting the meals time, press **SET** button to set portions number for each meal. Use **↑** **↓** button to set portions for each meal (each portion/serving is $6g \pm 2g$) .

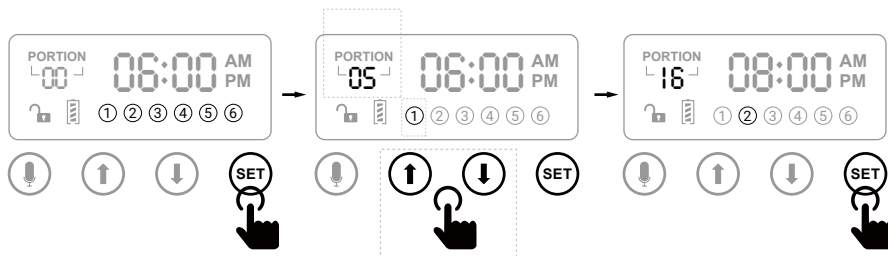


5. Manual Feeding

Press **SET** button to unlock, then press **↑** button to manually feed 1 portion/serving.

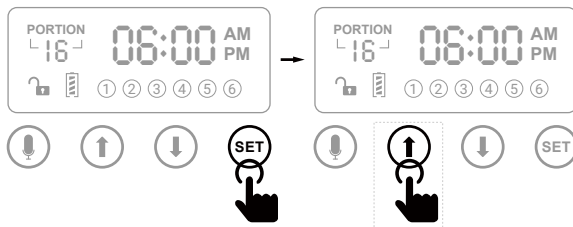


6. Voice Recording

Press **SET** button to unlock, then short press **🎤** button for 3 seconds, the red light will flash, then begin recording (up to 10 seconds).

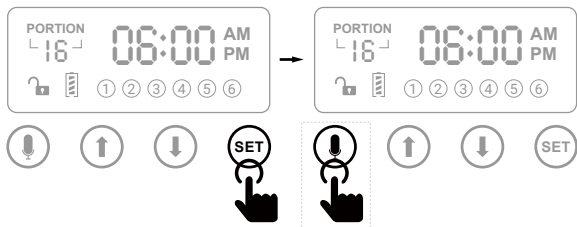


7. View Your Setting

Press **SET** button to unlock, then press **↑** button you can see all your settings.

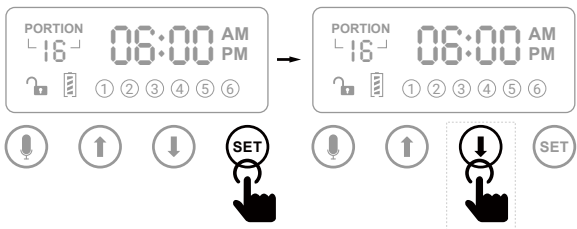

8. Reset All Settings


In the locked status, press   both buttons for 6 seconds to reset all settings.

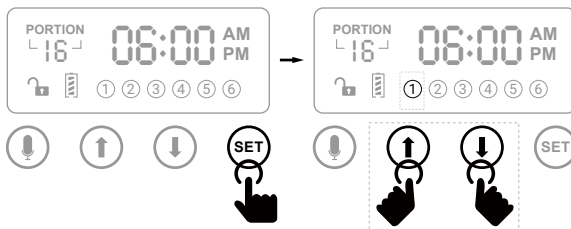

Cleaning and Maintenance



(How to disassemble the machine)

Scan the right QR code to watch this step video:

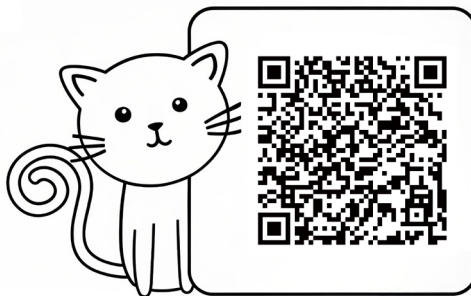


1. Disconnect the Power Supply

Before you disassemble or clean the feeder, you must always disconnect the power supply from power outlet.

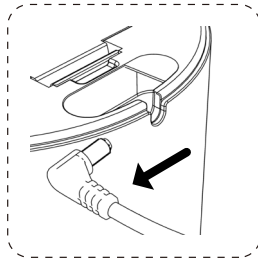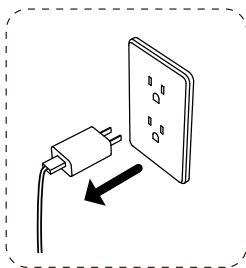



2. Remove the Lid, Pour out the Remaining Pet Food

Rotate the lid to unlock, then remove the lid, then take out the desiccant bag from the lid holder, and pour out the remaining pet food.

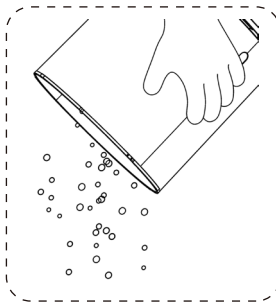


3. Remove Both Bowls

Hold tightly and raise the feeder on one hand, remove the bowls one by one on another one hand from the bowl lock position.

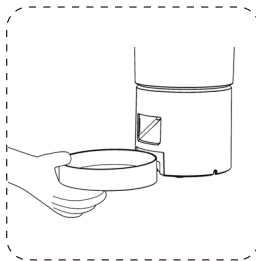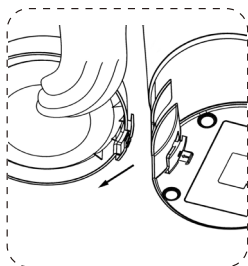


4. Remove the Food Bucket

Hold tightly the feeder main unit on one hand, hold the food bucket top on another hand, then rotate the food bucket counter-clockwise to remove it.

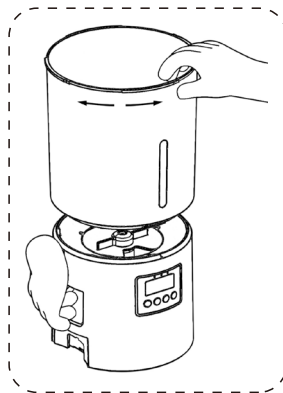


5. Wash the Disassembled Parts on the Faucet

You can wash the parts on the faucet, but the feeder main unit cannot be washed.

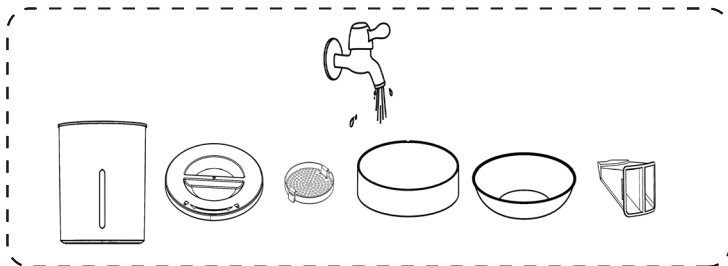

6. Clean the Feeder Main Unit with Dry Towel Only

Be careful: you can clean the feeder main unit with dry towel only, do not use any water or liquid or solvent, it will damage the main unit.

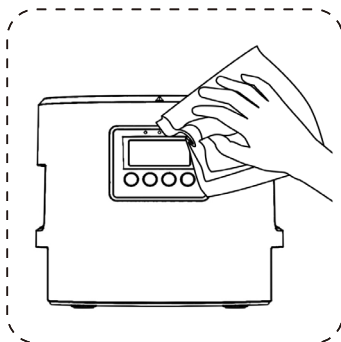

How To Use the Stopper

(make the dual feeder to be single feeder)

Scan the right QR code
to watch this step video:




1. If You Feed Both Pets, Remove or Don't Use the Stopper


The stopper's main function is to stop the pet food to flow out to one bowl, so that only one bowl to feed dry pet food for one pet.

If you feed two or more pets, please remove the stopper.

Note: There is only ONE stopper in the package, Not Two. When you receive one stopper in the package, that is original packing.

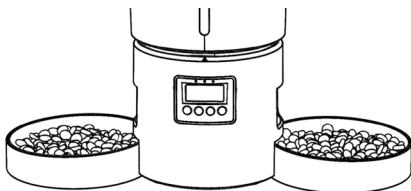

Dual feeding

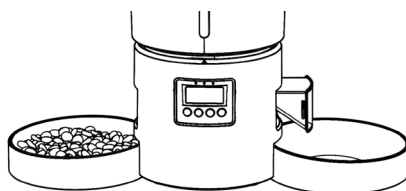


Single feeding


2. Insert the Stopper, Use It as Single Feeder

If you feed one pet, you can insert the stopper, then the pet food will flow out to only one bowl from the food bucket.

With the stopper, you can auto feed dry pet food in one bowl, while manual feed water or fish or snack or large kibble in another bowl.

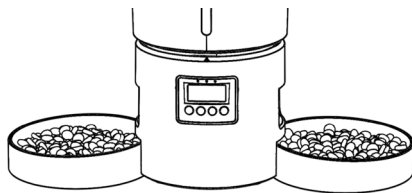

Dual feeding

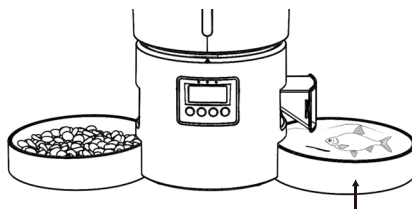

Feed Water or Fish or Snack

Suggested Feeding Amount

Feeding Amount for Adult Cat

Cat Weight (kg)	Light Weight (gram/day)	Normal (gram/day)	Overweight (gram/day)
2	60	40	-
3	85	75	-
4	95	85	70
5	100	95	80
6	105	100	90
7+	-	-	90

Feeding Amount for Kitten

Kitten Weight (kg)	Light Weight (gram/day)	Normal (gram/day)	Overweight (gram/day)
2	55	35	-
3	80	70	-
4	90	80	65
5	95	90	75
6	100	95	85
7+	-	-	85

This is for reference only. You should test the real amount for your pet, according to your pet's appetite, weight, age, health

Troubleshooting

Please send your trouble issues to support@miaosical, you will get quick help in 24 hours.

Problems	Solutions
Buttons can't be pressed	The panel automatically locks without operation for 20 seconds.Please press set button for 3 seconds to unlock the screen.
Forget the feeding schedule	Unlock the screen,press set button,then press to view your setting history.
Pet food don't come out	❶ Please pour in the dry pet food,make sure the dry food diameter is between 2-10 mm
	❷ Check if the batteries power are low
	❸ Check if the power adapter is connected
Screen don't show	❶ The panel automatically locks without operation for 20 seconds.Please press set button for 3 seconds to unlock the screen.
	❷ Check if the batteries power are low or power adapter is connected
	❸ If the batteries or power adapter is no problem,please contact customer support: support@miaosical.com
Can't hear recorded voice	Make sure you have recorded your voice--unlock screen,press button to check.If you still don't hear the voice,please record again

Share Using Experience On Social Media

Get One More Feeder

Dear customer,

Pick up your mobile phone,

Take photos and videos of feeding your pets by our product,

Share your using experience on social media (X/Twitter,Facebook,

Instagram,YouTube,TikTok,Snapchat,Reddit,Pinterest,LinkedIn etc.),and

send email to us :

kol@miaosical.com

Or fill in a form on page: miaosical.com/contact/kol

Or scan below QR code:



Manufacturer: Shenzhen Sanchong Technology Co.,Ltd

Address: 206,2nd Floor,No.25-3 Wulian Road,Longxi Community,Longgang Street,Longgang District,Shenzhen,Guangdong,China 518116

Email: support@miaosical.com

Website: www.miaosical.com



EU001736066607335MilC

VAT SPEED SL

Calle Antonio Salvador N99.1,28026

Madrid,Spain

services@vatspeed-eu.com

+34 916321624




UK001735625789703wEvi

EVATOST CONSULTING LTD

Office 101 32 Threadneedle Street,

London,United Kingdom,EC2R 8AY

contact@evatost.com +44 2076494690



RoHS



MADE IN CHINA