


igaur® 无线充电蓝牙音箱

型号: XG21008

产品使用说明


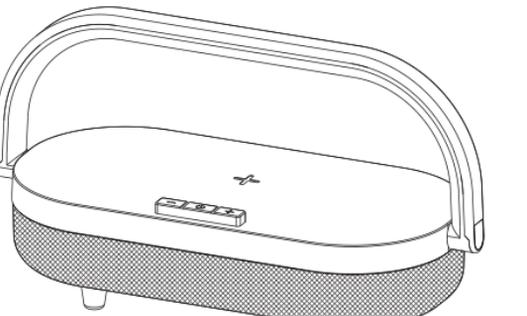


非常感谢您选择我司产品，
在使用产品前请认真阅读好说明书！



产品特点

- 造型精致实用
- 手机支架功能
- 可调节灯光角度
- 充电距离≤8mm
- TWS对箱功能
- 方便携带
- 无线充电
- 蓝牙音箱
- 免提通话
- 台灯

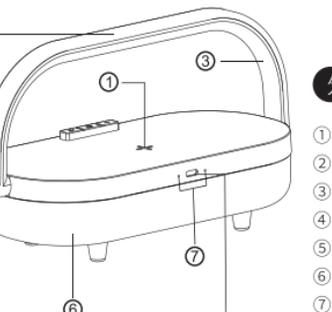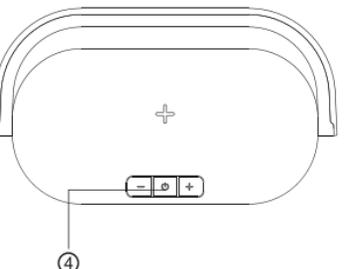

外观特征

- 无线充基准点
- 灯光调节开关
- 灯罩
- 蓝牙功能按键
- Type-C接口
- 音箱腔体
- 产品指示灯(蓝红)

01


操作方法

- 将USB数据线的USB端口接入5V=3A, 9V=2A 电源适配器, 另一端接入Type-C接口。
- 产品通电后, 产品指示灯红灯常亮。
- 将需要充电的设备放在本产品的充电指示区域, 蓝灯常亮, 进入充电状态。



提手旋转角度说明


警示:提手旋转角度范围在图示270°之内, 禁止360°旋转。

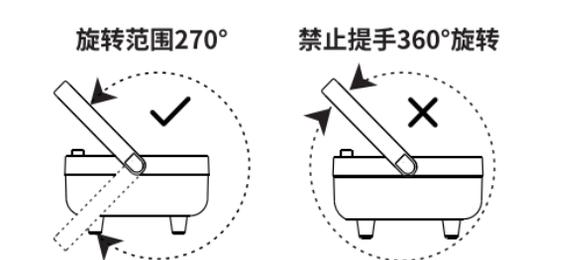

02

灯光触摸功能

- 触摸第一次启动第一档10%亮度
- 触摸第二次灯光为70%亮度
- 触摸第三次灯光为100%亮度
- 触摸第四次关闭灯光

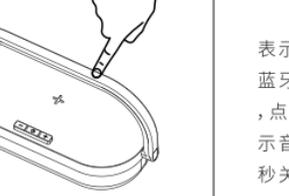

按键功能

[⏻] 电源开关/播放/暂停/免提通话/TWS对箱连接

长按5秒开机, 在播放状态下, 短按一下可以暂停播放的歌曲, 再次短按可播放歌曲。来电时, 短按接听电话, 长按2秒拒听电话; 在开机状态下, 长按5秒关机。双击任意一台音响电源键进入TWS对箱模式, 可实现2个音响互连, 实现左、右立体声道环绕效果。

[+] 音量加/下一曲

在播放状态时, 依次短按可加音量, 音量加到最大时发出“最大音量”的提示音, 长按会播放下一曲。

[-] 音量减/上一曲

在播放状态时, 依次短按可减音量, 长按会播放上一曲。


03

开启您的音响并使用

关机状态下, 长按电源键【⏻】5秒左右, 并且有提示音, 表示已经开机音箱在搜索配对中, 蓝灯快闪, 此时打开您手机的蓝牙功能, 在蓝牙设备中, 搜索蓝牙音箱出现【igaur S10】字样, 点击选中【igaurS10】自动进入配对, 配对连接成功后, 会有提示音, 蓝灯常亮。如果不使用音响时, 请长按电源键【⏻】5秒关机, 以免耗电。

备注:


- 型号: XG21008A (无内置电池+有蓝牙音箱) 需插线使用。
- 型号: XG21008B (无内置电池+无蓝牙音箱) 需插线使用。

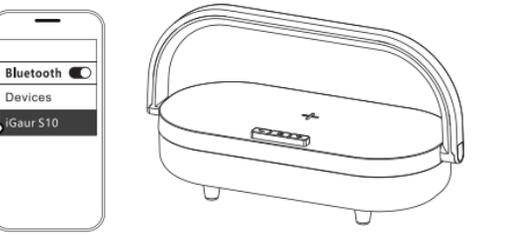

04

TWS对箱功能


- 双击任意一台音响的电源键进入TWS对箱模式, 等待8秒左右, 2个音响互连, 连接成功后, 主机蓝灯快闪, 副机蓝灯常亮, 主机保持与手机蓝牙配对, 实现左、右立体声道环绕效果。
- 再双击任意一台音响的电源键关闭TWS对箱模式可以单独播放音乐。

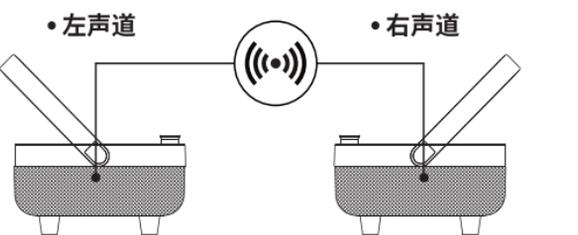

05

手机支架操作说明

- 将手机依靠在提手上, 倾斜到舒适角度, 可以播放视频。蓝牙与音响连接后手机音源输出到音响放大, 享受超重低音环绕效果, 见下图1。
- 提手旋转到音响背面, 把音响无线充表面倾斜到舒适角度, 可以给手机无线充电的同时播放观看视频, 手机音源输出到音响放大享受超重低音环绕效果, 见下图2。
- 当手机厚度偏高时, 按键不能支撑手机需要加装配件使用, 把增高按键套入原按键上, 见下图3。

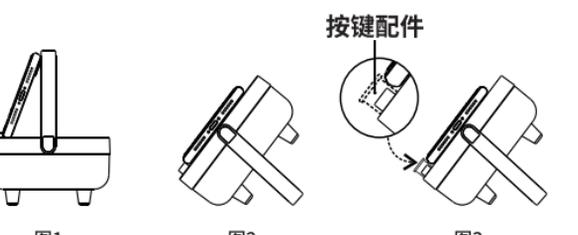


06

外出携带使用说明

内置5000mAh锂电池供电, 携带方便

- 外出携带使用时, 长按电源键【⏻】5秒开机, 所有功能正常使用。
- 当手机带无线充功能时, 可以直接放在音响充电面板上充电, 见下图。
- 开启状态下, 音响一直处于搜索状态, 可以连接配对。
- 当不使用时, 务必长按电源键【⏻】5秒关机, 以免耗电。
- 内置锂电池, 不可更换, 请勿丢弃或置于火中, 以免引起危险。

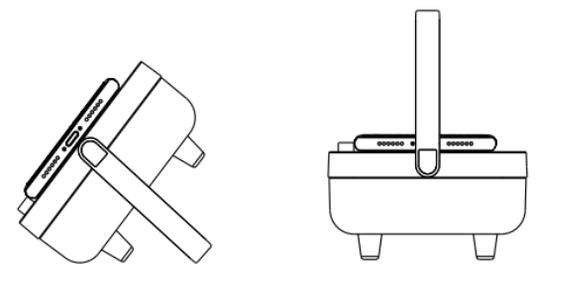

07

适用设备

智能识别充电设备, 兼容各大品牌;

苹果: iPhone12/12Pro, iPhone11/11Pro/11Pro Max, iPhoneXs/Xs Max, iPhoneXR, iPhoneX, iPhone8/8Plus;
三星: GalaxyS7/GalaxyS8/GalaxyS9; Note8, Note9;
华为: MateRS/Mate20Pro/Mate20RS; P30Pro;
小米: MIX2S, MIX3; (以上为部分主流设备)

注:

- 本产品支持无线充电功能, 通过磁感应方式实现短距离无线电能传输, 设有过充保护, 过压保护(6.5V)及过流保护(2A)。
- 请配套使用已获CCC证书并符合相关标准的电源适配器

注意事项

- 请勿长时间在阳光直射或高温的地方使用、存放该产品。
- 请勿在离磁卡、磁记录媒体和精密的仪器太近的地方充电。
- 请勿分解或改造本产品。
- 请勿用湿手触碰交流适配器。
- 请将本产品远离水或其他液体。
- 如果您想清洁本产品, 请断开电源。
- 产品工作环境温度范围20-45°C。

08

无线充规格参数

- 电源输入: 5V=3A 9V=2A
- 输出功率: 5W-15W
- 充电效率: 65%
- 锂电池容量: 5000mAh
- (注: 型号 XG21008A 和 XG21008B 无内置锂电池)
- 产品尺寸: 226X126X57mm

音箱规格参数

- 蓝牙版本: 5.2
- 喇叭功率: 4Ω10W
- 喇叭规格: 66mm
- 蓝牙距离: 10m

保修政策

产品售后服务严格依据《中华人民共和国消费者权益保护法》《中华人民共和国产品质量法》实行售后三包服务。

igaur | 艾高尔

制造商: 深圳市野牛科技有限公司
制造商地址: 深圳市宝安区鹤洲庄边邨工业区A栋5楼
服务电话: 0755-82810069
网址: www.igaur.cn

中国制造

09

产品保修卡 Warranty Card

用户名称 _____ 购买时间 _____
User Name _____ Purchase Time _____

联系电话 _____ 邮政编码 _____
Contact Number _____ Postal Code _____

产品型号 _____ 发票号码 _____
Product Number _____ Invoice Number _____

联系地址 _____
Contact Address _____


经销单位 (盖章生效) _____ 合格证 已检验
Dealer (stamp Company Seal Effect) _____



WIRELESS CHARGER BLUETOOTH SPEAKER

MODEL: XG21008

PRODUCT INSTRUCTIONS

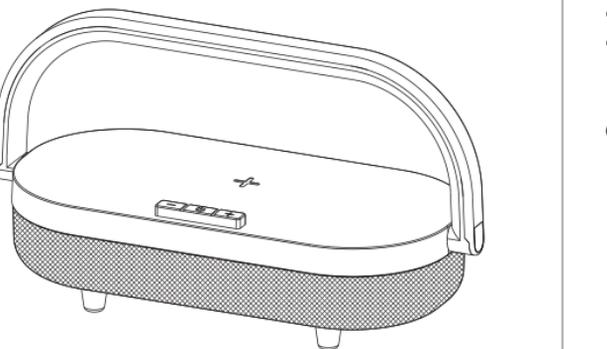


Thank you very much for choosing our products, please read the instructions carefully before using the product.



FEATURES

- Exquisite and Practical
- Phone Stand Function
- Adjustable Lighting Angle
- Charging Distance ≤ 8mm
- Wireless Charging
- TWS Interconnect
- Wireless Speaker
- Handsfree
- Carry Conveniently
- Lamp

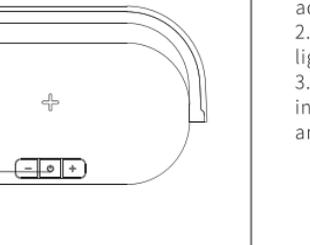


APPEARANCE CHARACTERISTICS

- 1 Wireless Charging Reference Point
- 2 On/off and Dimming
- 3 Lampshade
- 4 Function Button
- 5 Type-c Interface
- 6 Speaker Cavity
- 7 Indicator Light (Blue and Red)

01


OPERATION METHOD

1. Plug the USB data cable to the 5V=3A 9V=2A power adapter, and connect the other end to the Type-C interface.
2. After the product is powered on, the product indicator red light stays on.
3. Place the device that needs to be charged in the charging indication area of the product. The blue light is always on, and it enters the charging state.

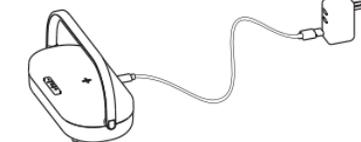

HANDLE ROTATION ANGLE DESCRIPTION

Warning: The handle rotation Angle is within 270° as shown in the picture. Do not rotate 360°.

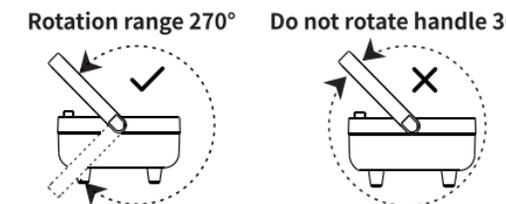

02

LIGHT TOUCH FUNCTION

- ▶ Touch the first time to start the light 10% brightness.
- ▶ Touch the second time to change the light 70% brightness.
- ▶ Touch the third time to change the light 70% brightness.
- ▶ Touch the fourth time to turn off the light.

BUTTON FUNCTION

[⏻] Power switch/play/pause hands-free calling/TWS stereo surround

Press and hold for 5 seconds to turn on the speaker. In the playback state, short press to pause the song, short press again to play the song. When there is a phone call, short press to answer the call, long press for 2 seconds to reject the call; In the power-on state, press and hold for 5 seconds to power off. Double-click the power button of any speaker to enter the TWS pair speaker mode.

[+] Volume up/next song

In the playback state, short press to increase the volume, and "most volume" will occur when the volume is maximized. Long press will play the next song.

[-] Volume down/last song

In the playback state, short press in order to decrease the volume, long press will play the previous song.


03

TURN ON YOUR SPEAKER AND USE

In the off state, **[⏻]** press the play button for about 5 seconds, and there is a beep sound, indicating that the speaker is searching for pairing, the blue light flashes quickly. At this time, turn on the Bluetooth function of your mobile phone. In the Bluetooth device, search for Bluetooth click to select the **[iGaur S10]** device name and it automatically enters the pairing. After the pairing is successful, there will be a beep and the blue light will be on.

If you are not using the speaker, please press and hold the **[⏻]** power button for 5 seconds to shut down to avoid power consumption.


- Notes:**
- Model: XG21008A (without built-in Li-battery), It can be used only when it is plugged in.
 - Model: XG21008B (without built-in Li-battery + without Bluetooth speaker). It can be used only when it is plugged in.

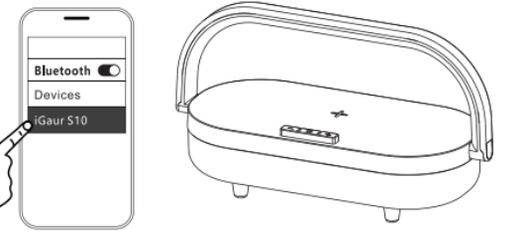

04

TWS INTERCONNECT

1. Double-click the power switch of any speaker to enter TWS pair speaker mode. Waiting for about 8 seconds, the two speakers are interconnected. After the connection is successful, the blue light of the main unit flashes quickly and the blue light of the slave unit stays on. The main unit keeps pairing with the mobile phone Bluetooth and realize the surround effect of left and right stereo channels.
2. Double-click the power switch of any speaker to turn off TWS pair speaker mode, and you can play music separately.

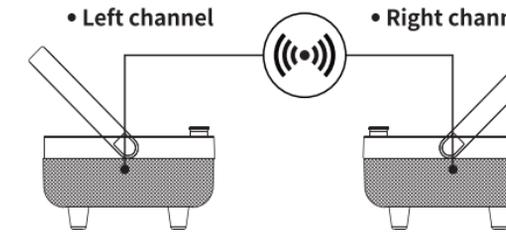


05

PHONE HOLDER OPERATING INSTRUCTIONS

1. Lean the phone on the handle and tilt it to a comfortable angle to play the video. After the Bluetooth is connected to the speaker, the speaker source of the mobile phone is output to the speaker amplifier to enjoy the super bass surround effect. **See picture 1**

2. Rotate the handle to the back of the speaker, tilt the wireless charging surface of the speaker to a comfortable angle, you can wirelessly charge the phone while playing and watching the video, the phone speaker source is output to the speaker for amplification and enjoy the super bass surround effect. **See picture 2**

3. When the thickness of the phone is too high, the buttons cannot support the phone and need to be installed with accessories put the heightened button on the original button. **See picture 3**

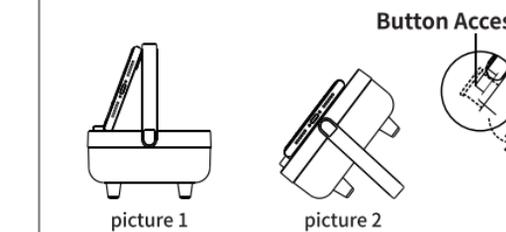

picture 1

picture 2

picture 3

06

CARRYING OUT INSTRUCTIONS

Built-in 5000mAh lithium battery power supply, carry conveniently


1. When going out and using it, press and hold the power button **[⏻]** for 5 seconds to turn on, and all functions can be used normally.

2. When the mobile phone has wireless charging function, it can be charged directly on the speaker charging panel. **See picture a and b**

3. When turned on, the speaker is always in the search state and can be connected and paired.

4. When not in use, be sure to press and hold the power button **[⏻]** for 5 seconds to shut down to avoid power consumption.

5. Built-in lithium battery, cannot be replaced, do not discard or put in the fire, so as to avoid danger.

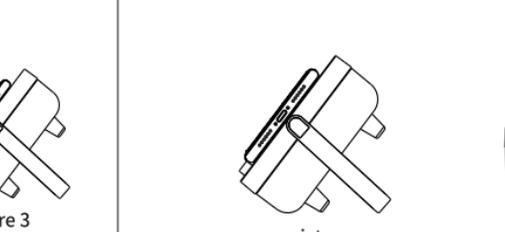

picture a

picture b

07

APPLICABLE DEVICE

Intelligent identification of charging device, compatible with major brands;

iPhone: iPhone12/12 Pro, iPhone11/11 Pro/11 Pro Max, iPhoneXs/Xs Max, iPhoneXR, iPhoneX, iPhone8/8 Plus;

Samsung: GalaxyS7/GalaxyS8/GalaxyS9; Note8, Note9;

HuaWei: MateRS/Mate20Pro/Mate20RS; P30Pro;

XiaoMi: MIX2S, MIX3;

Note: this product supports wireless charging function and realizes short-range wireless energy transmission by magnetic induction. With overcharge protection, overvoltage protection (6.5V) and overcurrent protection (2A).

Please use the power adapter that has obtained CCC certificate and meets relevant standards

PRECAUTIONS

- Do not use the product in direct sunlight or high temperature for a long time.
- Do not charge too close to magnetic cards, magnetic recording media and precision instruments.
- Do not disassemble or modify this product.
- Do not touch the AC adapter with wet hands.
- Keep the product away from water or other liquids.
- If you want to clean this product, disconnect the power.
- Product working environment temperature range 20-45°C.

08

WIRELESS CHARGING SPECIFICATIONS

- Power Input: 5V=3A 9V=2A
- Output Power: 5W-15W
- Charging Efficiency: 65%
- Lithium Battery Capacity: 5000mAh

(Model: XG21008A and XG21008B without built-in Li-battery)

- Product Size: 226x126x57mm
- The power charging port is the international universal Type-C port

SPEAKER SPECIFICATION

- Audio Specifications Bluetooth Version: 5.2
- Speaker Power: 4 Ω10W
- Speaker Specifications: 66mm
- Bluetooth Distance: 10m

igaur | 艾高尔

Manufacturer: Shenzhen Gaur Technology Co. Ltd
Address: 5 Floor, A Building, Zhuangbian Area,
Hezhou Baoan, Shenzhen.

Service Hotline: +86 0755-82810069

Website: www.igaur.cn

Made in China

09