

B8 User Manual



B8


Wireless Over-Ear Music Headphones

User Manual

LED Indicator Instructions


Power on	After the blue light stays on continuously it enters pairing mode.
Pairing status	Red/blue lights flash alternately.
Standby mode	The blue light stays on continuously.
Low battery level	The red light flashes 3 times every 10 seconds.
Charging mode	While charging, the red light is on; when fully charged, the red light goes off.

Outline Diagram and Functional Overview of Headphones

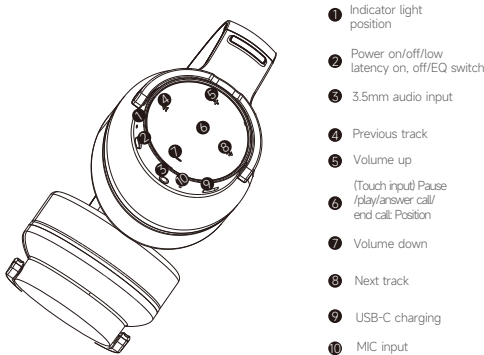


Basic Operation of BT Earphones

❶ Power On



Press and hold the power button for 3 seconds to turn off the headphones. After that, the red light stays on for 2 seconds and then goes off. ❶

❷ Power Off



After pressing the power button for 3 seconds, the blue light on the headphones stays on continuously for 2 seconds, then the device powers on. After powering on, it automatically enters pairing mode, and the BT indicator light alternates between red and blue flashes. ❷

❸ BT Connection Mode

After turning on the earphones, the indicator light alternates between red and blue. Turn on the BT function on your device, search for the BT device name of the earphones: "Picun B8" and click on "Picun B8" to connect. Once successfully connected, the blue light will stay on constantly, and while playing music, the blue light will flash slowly.




Volume Adjustment

Short press/Long press the plus button for 1 second to increase the volume.
Short press/Long press the minus button for 1 second to decrease the volume.




Song Selection

Short press/long press to skip to the previous track.
Short press/long press to skip to the next track.



Playback/pause/answer call/end call

Short press the touch button during music playback to pause the music.
Short press the touch button when the music is paused to resume playback.
Short press the touch button to answer a call when there is an incoming call.
During a call, short press the touch button to end the current call.
Long press the touch button to reject a call when there is an incoming call.



Automatic Shutdown and Out-of-Range Reconnection

When the headphones exceed the effective range, they will disconnect. If the headphones return to the BT range within 5 minutes, they will automatically reconnect. If they do not return within 5 minutes, they will shut down automatically.

Enable/disable low latency mode

With low latency mode disabled, press the power button three times to activate it (default to start in normal mode). Pressing the power button three times again will deactivate the low latency mode. ❹

Voice Assistant

Triple press the touch button to activate the voice assistant, and triple press again to deactivate the voice assistant.

Switch between 3 EQ modes.

(Double-click the power button). Cycle through the 3 EQ modes (The last turned off mode is saved as default after turning off):

- (1) Pop music mode, slow flashing in blue (interval 2S, blue light flashes 0.5S, 1 time).
- (2) Bass boost mode, slow flashing in blue (interval 2S, blue light flashes 0.5S, 2 times).
- (3) Rock mode, slow flashing in blue (interval 2S, blue light flashes 0.5S, 3 times).

Battery Status

When connected to an iOS device, the current headphone battery status will be displayed in the top right corner of the iOS device screen.

Headphone Charging

When the battery is low, charge the headphones for about 2 hours using a USB charging cable. The headphones will automatically shut down during charging. During charging, the red indicator light will stay on, and it will turn off when fully charged.

Clear pairing information

Press and hold the volume down button and the next track button for more than 4 seconds in any state to enter the pairing information clearing mode. All information will be cleared: the volume will return to default, and the BT pairing list will be cleared.

One-to-two connection method

1. In the power-off state, press the power button for 3 seconds to put the headset into pairing mode, then connect to the first phone.
2. Turn off the BT function of the first connected mobile phone, put the headphones into pairing mode, and then connect the second mobile phone.
3. The first mobile phone turns on BT and manually connects to the headphones.

Line-in mode

When an audio cable is inserted, the headphones will automatically power off.
Note: When using a wired connection, BT cannot be started normally. You need to unplug the audio cable to start the headphones normally.

Product Parameters

BT Protocol	A2DP/AVRCP/HFP/HSP
Reception Distance	10m
Speaker Size	40mm
Frequency Response Range	20HZ-20kHz
Speaker Sensitivity	118±3dB
Speaker Impedance	32Ω±15%
Microphone Sensitivity	~42dB±3dB
Operating Current	9-30mA
Charging Voltage	5V

Packaging Accessories

1. BT Headphones	3. Audio Cable
2. Charging Cable	4. User Manual