


# Wave Plus Adjustable bed Assembly Guideline

Step 1



Unwrap the box and  
remove the corner caps

Step 2

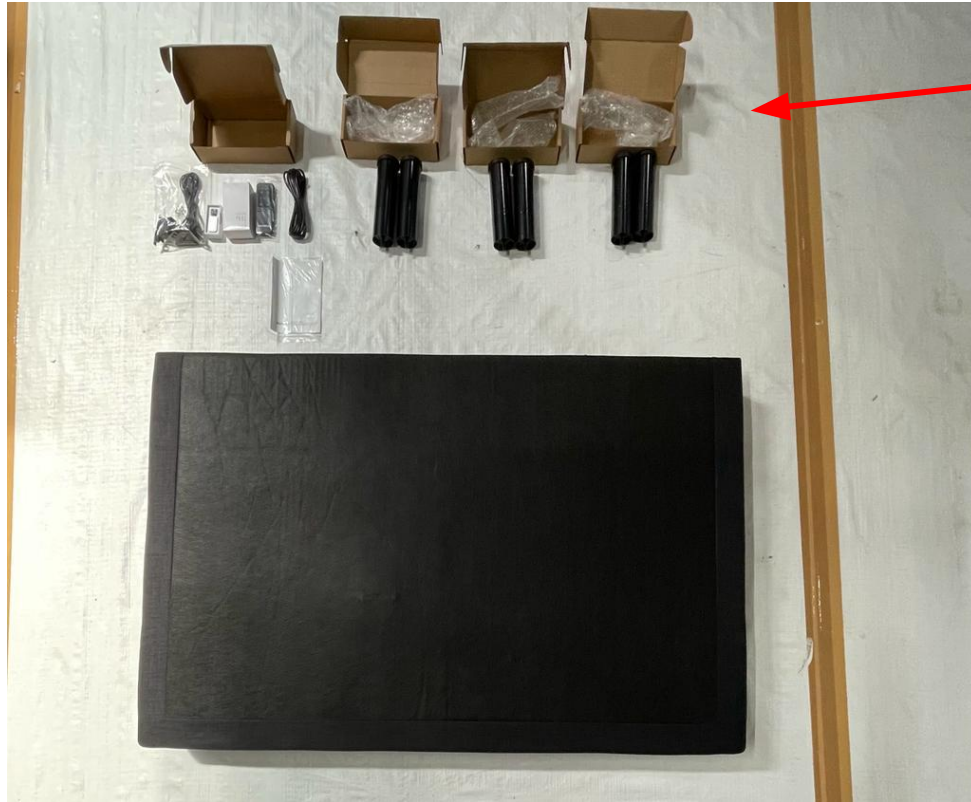

Remove the Four boxes which is located inside the bed.

Check for the quantity mentioned below

**For King  
Box 1**

- 9" metal cylindrical legs - 4 nos

**Box 2**

- 9" metal cylindrical legs - 2 nos

**Box 3**

- Wave bed remote controller - 1 nos
- AC Adapter -1 nos
- User Manual - 1 nos
- Bluetooth Dongle - 1 nos
- AC adapter wire - 1 nos
- Wire Clips - 4 nos
- Screws - 4 nos
- USB connector - 2 nos
- Metal Clamp(for USB)

**For Queen  
Box 1**

- 9" metal cylindrical legs - 2 nos

**Box 2**

- 9" metal cylindrical legs - 2 nos

**Box 3**

- 9" metal cylindrical legs - 2 nos


**Box 4**

- Wave bed remote controller - 1 nos
- AC Adapter -1 nos
- User Manual - 1 nos
- Bluetooth dongle - 1 nos
- AC adapter wire - 1 nos
- Wire Clips - 4 nos
- Screws - 4 nos
- USB connector - 2 nos
- Metal Clamp(for USB)



- Wave bed remote controller - 1 nos
- AC Adapter -1 nos
- User Manual - 1 nos
- Bluetooth Dongle - 1 nos
- AC adapter wire - 1 nos
- Wire Clips - 4 nos
- Screws - 4 nos
- USB connector - 2 nos
- Metal Clamp(for USB)


Step 3

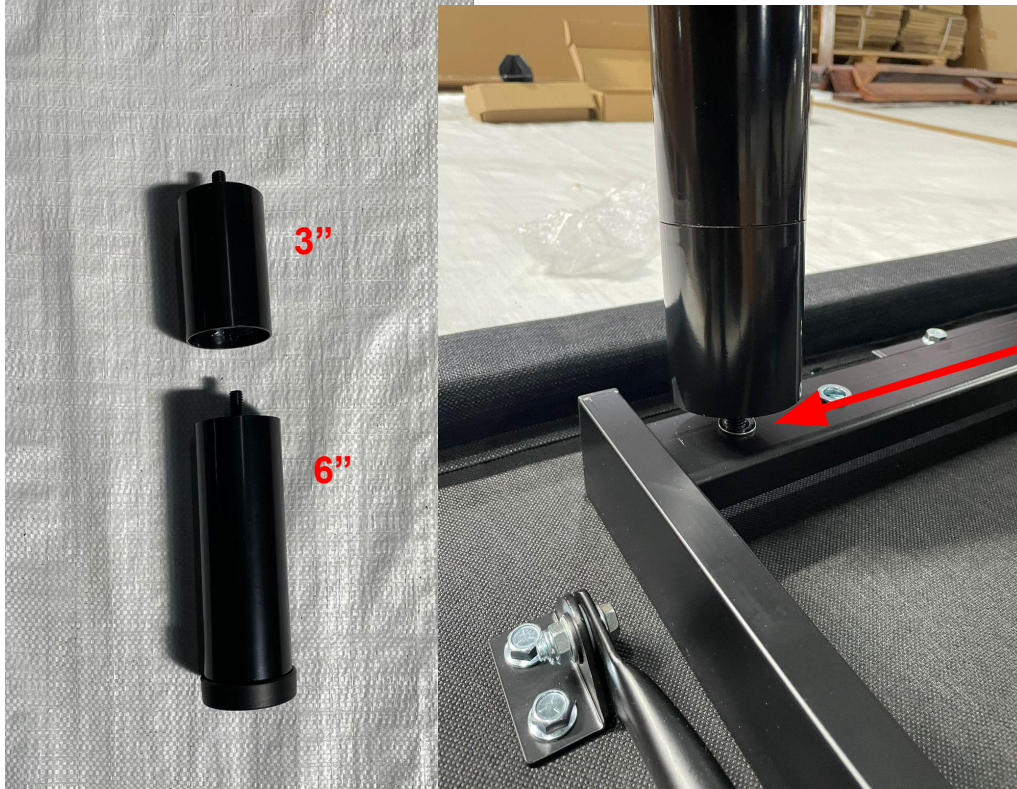


1.Unfold the Bed

2.Choose the Desired height of leg required and align the legs accordingly

3.Screw the Metal legs at 4 corners and 2 nos in the middle as shown in the picture

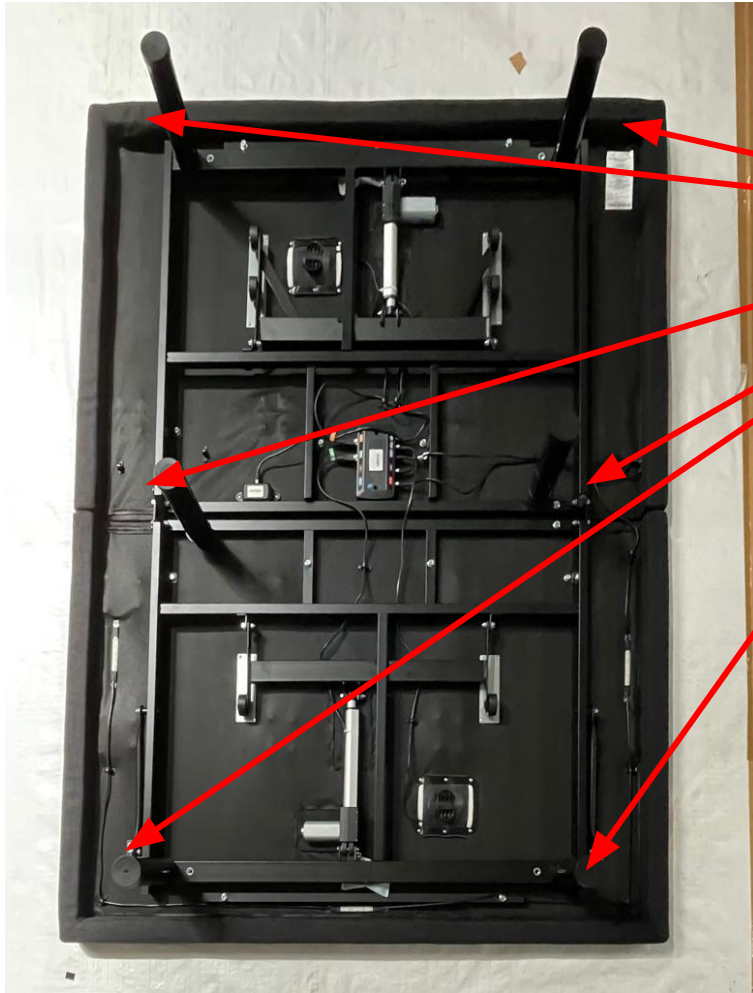

Legs fixing position - 6 nos

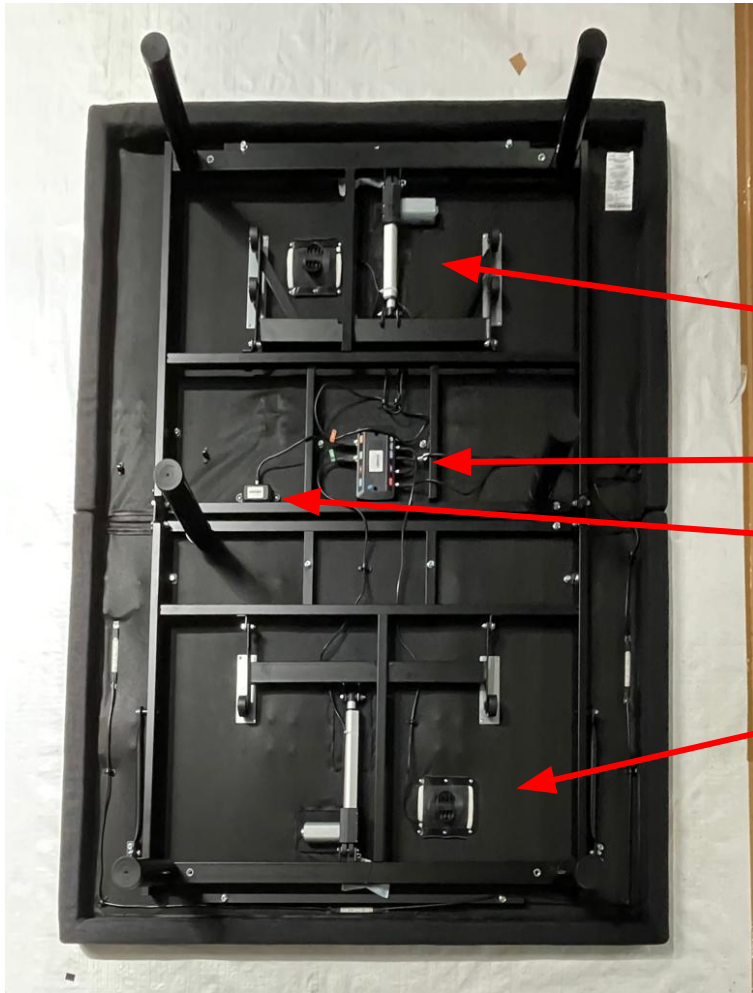



Actuator

Control Box

USB connection

Vibration Motor

### Step 4

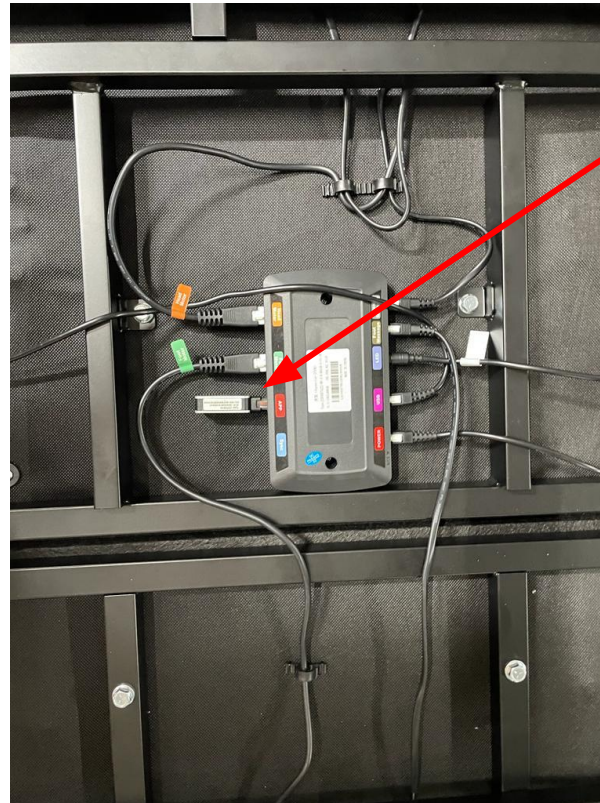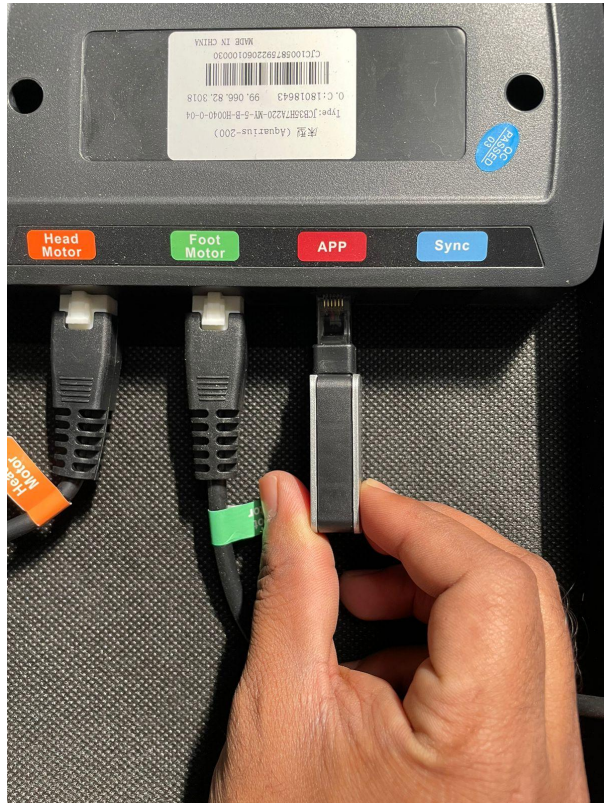

Insert the Bluetooth dongle in the app port

Step 5



1. Insert the USB Connector as shown in the picture
2. Organise the wire with the help of wire clip

Step 6



1. Remove the Mattress holder  
from the bed



2. Fix the Mattress holder as shown in the image

# Step 7



1. Connect the power adapter with control box



2. Lock the connection



3. Connect the power cable with the power adapter



4. Untie the wire for power connection and connect in power socket

Step 8



Insert the batteries into  
the remote

3xAAA Batteries

## Step 9 - Ready to use



1.Wait for 60 sec

2.And your Duroflex  
Wave Plus Adjustable  
bed is ready to use.

**Note: Refer the user  
manual for App usage.**