



Owner's Guide



VECLESUS VC1

Car License Plate Backup Camera

Camera Installation

The best location to fit the camera is directly on the car license plate. All cars feature a light to illuminate the number plate at night, which may allow a cable to run inside of the car trunk.

(A) Loose the original screws on the number plate with wrench.

(B) Thread camera cable through the space for the number plate light. If your car doesn't feature this light, or a hole to thread this cable through, a discreet 7mm hole needs to be drilled to allow this cable into the rear part of the car trunk.

(C) Once the cable is secure inside the car, then tighten the screws to put the camera on the license plate, and put the license plate back to the vehicle. If necessary, use cross screwdriver to loosen the screw beside the camera head, till up or down the vertical angle of the lens, which may improve the view of the camera lens.

1




(A)



(B)



(C)



2


www.veclesusclub.com
www.veclesus.net

Email: service@veclesusclub.com



Join us

Wire Connection Diagram

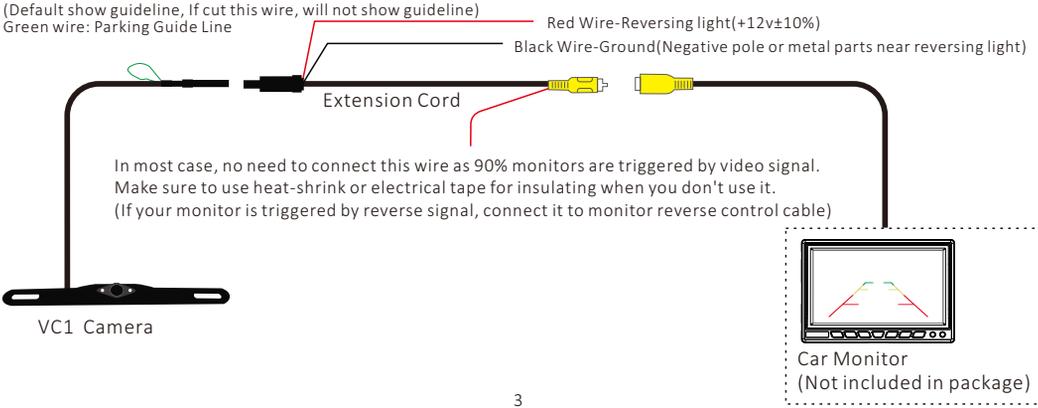

3

Notes

Black (Ground)-Locate a suitable location to ground (negative) the black wire in the wiring harness. You may connect this wire to a factory ground point in the vehicle, or attach a ring terminal to the black wire and screw into the body of the vehicle. If you choose to screw into the body, clean the area of any paint or adhesives to allow for good metal to metal connect.

Technical Specification

TV System	PAL() NTSC(v)	Night Vision	YES(v) NO()
Resolution	480TV Lines	Video Put	RCA connector (1.0Vp-p.75 Ohm)
Power Supply	DC12V±10%	S/N Ratio	More Than 48dB
Water-proof	IP68 Waterproof Rating	Scanning System	2:1 Interlace

4

Sensor	CMOS	Effective Pixel	648*488
Horizontal Sync Frequency	15734kHz	Vertical Sync Fre	60Hz
Operating Temperature	-4°F~158°F RH95% MAX	Lens Angle	92°~170°
Storage Temperature	-22°F~176°F RH95% MAX	Horizontal Angle	92°~170°

Package Contents

- | | |
|-------------------------------|----------------------------|
| Backup camera * 1 | Triple-use screwdriver * 1 |
| 8M(26.2ft) extension cord * 1 | Thanks card * 1 |
| Clamps and straps | User manual * 1 |

5

Camera Introduction

No signal transmission delay and widely available: It has a 0.45MP without any signal delay with professional imported chips inside, which makes it available to more than 98% of the cars' monitor.

Super night vision and wide field of view: Vertical view angle adjustable, large viewing angle, super night vision effect. The license plate camera shows a very clear image when you get your car reverse.

Easy to Install: The drilling-free design makes you get it fixed on the plate quickly. IP68 waterproof rating can secure your parking safety, no matter what the weather is.

Exquisite product and packaging design: It has the front-end all-metal construction and is packed in a beautiful gift box. Thus, it is not only for yourself use but also for a gift.

Ver 2.0

6

20200911